



- ★ Matched to Leading transceiver ICs
- ★ Designed to meet IR 235⁰C peak requirement
- ★ Small EP13 Package in SMD




Specifications					
Part Number	Application	Turn Ratio (2%) (1-5):(9-6)	OCL @ 10 KHz, 0.1 V (1-5), 2-4 shorted	DCR (1-5), 2-4 shorted	DCR (9-6)
UT0001	ISDN-U	1.65CS:1CT	13-18mH	7.4 ohms Max	4.4 ohms Max

Specifications continue				
Part Number	Return Loss 10 KHz-25 KHz	Longitudinal Balance (from 281 KHz to 40 KHz)	Idc	Isolation Voltage (Vrms)
UT0001	20 dB MIN	-55 dB Min	50 mA	1500

Dimension

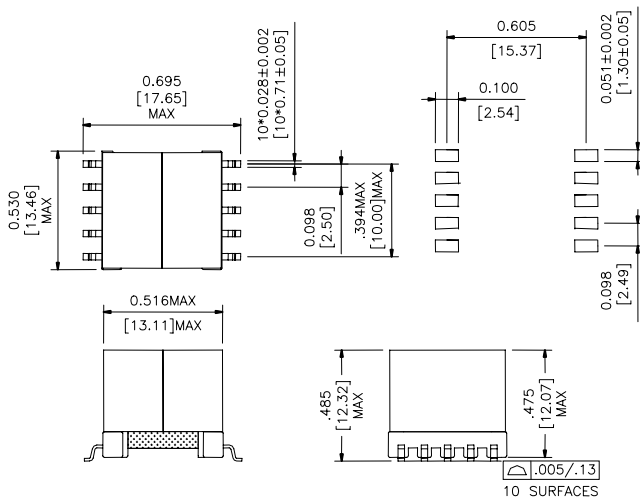

Schematic

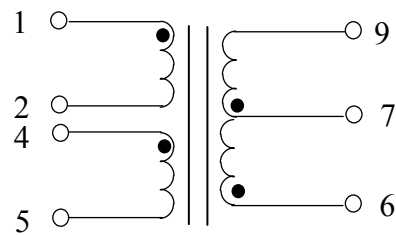

UT0001

Data sheet subject to change without notice