


- ★ Meets requirements of IEC60950 for supplementary insulation
- ★ Designed to meet IR 235°C peak requirement For SMD Parts
- ★ Small EP13 Package in SMD and THT Type


Specifications					
Part Number	Application	Turn Ratio (1%) (1-5):(9-7)	OCL @ 10 KHz, 0.1 V (1-5), 2-4 shorted	Leakage Inductance @ 100 KHz, 0.1 V (1-5), (2-4)(7-9)shorted	Insertion Loss (@ 100 KHz)
DT0011	SMD	4:1	2.07 mH(±4%)	15uH Max	0.5 dB Max
DT5011	THT	4:1	2.07 mH(±4%)	15uH Max	0.5 dB Max

Specifications continue		
Part Number	DCR 1-4 / 2-5 / 9-7	Isolation Voltage 1sec,500uA (Vrms)
DT0011	1.83/1.83/0.33 ±10%	1875
DT5011	1.83/1.83/0.33 ±10%	1875

### Dimension

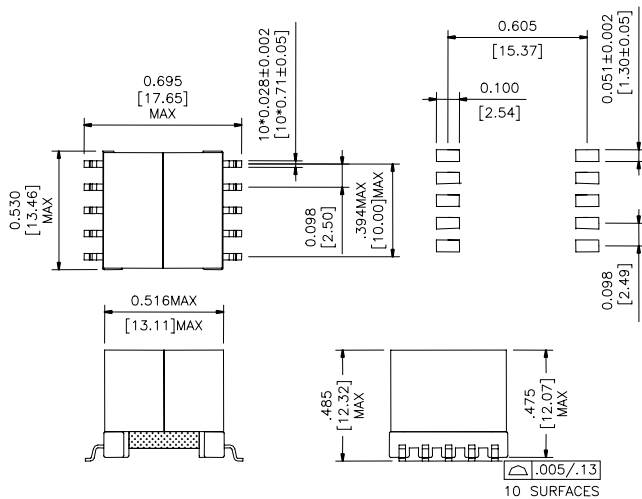


### Schematic

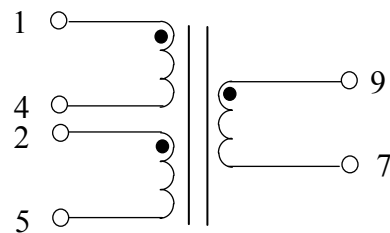


**DT0011**

Data sheet subject to change without notice

**Dimension**

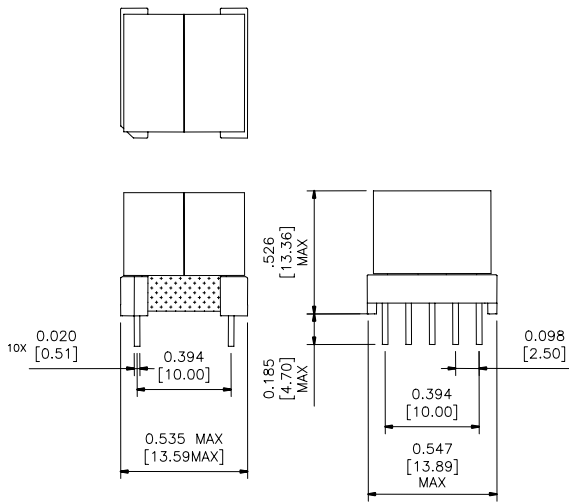

**Schematic**

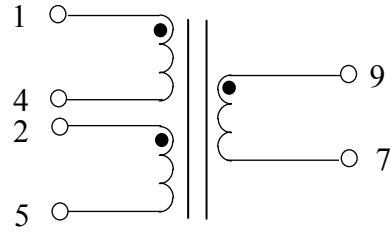

**DT5011**

Data sheet subject to change without notice