




Demo Only

Desktop Battery Charger

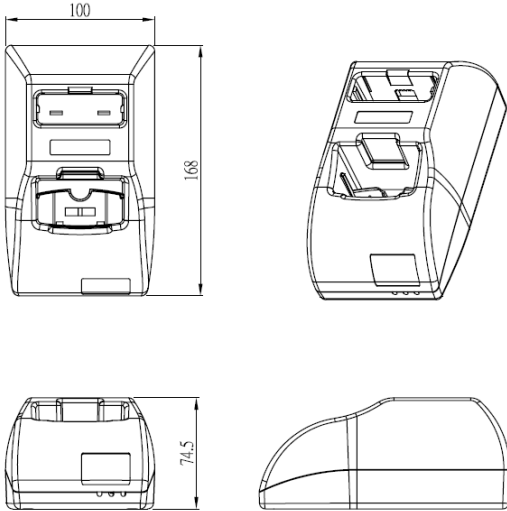

Electrical specifications :

Input:

Voltage..... 100-240VAC
Current.....0.6A rms Max
Frequency.....50-60 Hz

Output:

Voltage (Vo)..... (see table)

Tolerance.....under +/- 1%(Micro-controlled)

Power (Po).....20W

Hold up time.....8mS min at Full Load, 115VAC

Over voltage protection.....Built-in

Short circuit protection.....Hiccup Mode, Auto Recovery

Efficiency.....70% min, at Full Load and 115VAC

Ripple/Noise (Vp-p).....2% (20M Hz Bandwidth)

Calculated MTBF..... Over 100 Khr at 25C

Feature:

Universal Input 100V to 240VAC
IEC Socket C8 Input
Charger for Li-ion Battery and Transceiver
Three LED for Indicator the status

Environmental :

Operating Temperature:
0 deg. C to 40 deg. C
Storage Temperature:
-20 deg. C to 80 deg.C

Output Electronic Specifications:

Model No.	Po	Vo	Io
Customer's confidentiality	20W	9.4VDC 8.4VDC	0.9A 0.65A

EMI:

Meet FCC Class B and
CISPR 22 Class B

Safety: CE