


B11**POLYESTER & FOIL**

Axial Lead

OVAL

Wrap & Fill

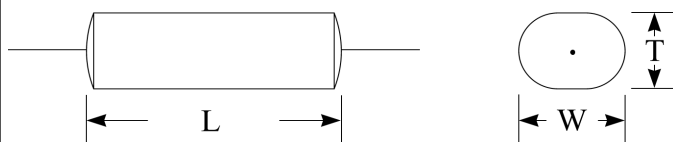

LEAD LENGTH = 1.5" MIN.

Lead Gauge	200VDC	400VDC	600VDC
24AWG	.001 - .10	.001 - .033	.001 - .015
22AWG	.12 - .22	.039 - .10	.018 - .047
20AWG	.27 - 2.0	.12 - 1.0	.056 - .47

MFD	200 VDC				400 VDC				600 VDC			
	T +.05	W +.05	L +.05	PART NO.	T +.05	W +.05	L +.05	PART NO.	T +.05	W +.05	L +.05	PART NO.
.0010	.11	.20	.53	B11C102	.11	.20	.53	B11E102	.11	.20	.53	B11F102
.0012	.11	.20	.53	B11C122	.11	.20	.53	B11E122	.11	.20	.53	B11F122
.0015	.11	.20	.53	B11C152	.11	.20	.53	B11E152	.11	.20	.53	B11F152
.0018	.11	.20	.53	B11C182	.11	.20	.53	B11E182	.11	.20	.68	B11F182
.0022	.11	.20	.53	B11C222	.11	.20	.53	B11E222	.11	.20	.68	B11F222
.0027	.11	.20	.53	B11C272	.11	.20	.53	B11E272	.11	.20	.68	B11F272
.0033	.11	.20	.53	B11C332	.11	.20	.53	B11E332	.11	.20	.68	B11F332
.0039	.11	.20	.53	B11C392	.11	.20	.68	B11E392	.13	.22	.68	B11F392
.0047	.11	.20	.53	B11C472	.11	.20	.68	B11E472	.14	.23	.68	B11F472
.0056	.11	.20	.53	B11C562	.11	.20	.68	B11E562	.13	.22	.81	B11F562
.0068	.11	.20	.53	B11C682	.11	.20	.68	B11E682	.14	.23	.81	B11F682
.0082	.11	.20	.53	B11C822	.13	.22	.68	B11E822	.17	.26	.81	B11F822
.010	.11	.20	.53	B11C103	.14	.23	.68	B11E103	.19	.28	.81	B11F103
.012	.11	.20	.68	B11C123	.13	.22	.81	B11E123	.20	.29	.81	B11F123
.015	.11	.20	.68	B11C153	.14	.23	.81	B11E153	.20	.29	.81	B11F153
.018	.13	.22	.68	B11C183	.17	.27	.81	B11E183	.24	.33	.95	B11F183
.022	.14	.23	.68	B11C223	.18	.28	.81	B11E223	.25	.34	.95	B11F223
.027	.15	.25	.68	B11C273	.19	.29	.81	B11E273	.26	.35	.95	B11F273
.033	.16	.26	.68	B11C333	.20	.29	.81	B11E333	.26	.35	.95	B11F333
.039	.17	.27	.81	B11C393	.25	.34	.95	B11E393	.30	.39	.95	B11F393
.047	.17	.27	.81	B11C473	.26	.35	.95	B11E473	.33	.42	.95	B11F473
.056	.18	.28	.81	B11C563	.29	.38	.95	B11E563	.38	.47	1.17	B11F563
.068	.18	.28	.81	B11C683	.31	.40	.95	B11E683	.39	.48	1.17	B11F683
.082	.20	.30	.81	B11C823	.32	.41	.95	B11E823	.40	.56	1.17	B11F823
.10	.21	.31	.81	B11C104	.33	.42	.95	B11E104	.41	.57	1.17	B11F104
.12	.25	.34	.95	B11C124	.38	.47	1.17	B11E124	.44	.61	1.45	B11F124
.15	.26	.35	.95	B11C154	.39	.48	1.17	B11E154	.45	.62	1.45	B11F154
.18	.28	.37	.95	B11C184	.40	.56	1.17	B11E184	.46	.63	1.45	B11F184
.22	.29	.38	.95	B11C224	.41	.57	1.17	B11E224	.47	.63	1.45	B11F224
.27	.27	.44	1.17	B11C274	.40	.56	1.45	B11E274	.57	.73	1.68	B11F274
.33	.28	.45	1.17	B11C334	.41	.57	1.45	B11E334	.59	.75	1.68	B11F334
.39	.32	.49	1.17	B11C394	.46	.62	1.68	B11E394	.64	.80	1.95	B11F394
.47	.35	.52	1.17	B11C474	.47	.63	1.68	B11E474	.66	.82	1.95	B11F474
.56	.38	.55	1.17	B11C564	.53	.69	1.95	B11E564				
.68	.41	.57	1.17	B11C684	.54	.70	1.95	B11E684				
.82	.40	.56	1.45	B11C824	.60	.76	1.95	B11E824				
1.0	.41	.57	1.45	B11C105	.66	.82	1.95	B11E105				
1.2	.48	.64	1.45	B11C125								
1.5	.54	.70	1.45	B11C155								
1.8	.57	.73	1.68	B11C185								
2.0	.59	.75	1.68	B11C205								

Add letter to the end of
the part number to specify
the tolerance.

±20% = M
±10% = K
±5% = J
±3% = H
±2% = G
±1% = F

**Bishop Electronics Corporation**

3729 San Gabriel River Parkway • Pico Rivera CA 90660
(562) 695-0446 (562) 692-9391 FAX : (562) 692-4008
email: Sales@bishopelectronics.com