

# 150 WATT HCM CHASSIS MOUNT DC/DC CONVERTERS



## Features

- 4:1 Input voltage range
  - High power density
  - Chassis Mount design for excellent thermal performance
  - Terminal blocks for ease of use
  - Volt-seconds clamp and fast over voltage protection
  - Pulse-by-pulse current limiting, short circuit frequency foldback, dead short shut down
  - Over-temperature protection
  - Auto-softstart
  - Low noise
  - Constant frequency during normal operation
  - Remote sense
  - Remote ON/OFF
  - Super energy saving, 8 mA input idle current
  - Output trim with very low temperature coefficient
  - Good shock and vibration damping
  - Available in both RoHS and Non-RoHS construction.
- See ordering info below model selection chart.

## Description

The 4:1 Input Voltage 150 W single HCM Series of DC/DC converters provide precisely regulated dc outputs. The output voltage is fully isolated from the input, allowing the output to be positive or negative polarity and with various ground connections. The HCM Series meets the most rigorous performance standards in the industry standard case size for data communications and process control applications.

The 4:1 Input Voltage 150 Watt HCM Series includes remote sensing, output trim, and remote ON/OFF. Through holes are provided to allow easy mounting or add a heat sink for extended temperature use. Integrated terminal blocks allow for easy connectivity. An optional DIN Rail Adapter is available for DIN Rail Mounting the HCM. See Selection Chart for ordering information.

Selection Chart					
Model	Input Range VDC		lin ADC	Vout VDC	Iout ADC
	Min	Max	TYP		
24S3.30HCM	9	36	5.00	3.3	30
24S5.30HCM	9	36	7.80	5	30
24S12.12HCM	9	36	7.18	12	12.5
24S15.10HCM	9	36	7.10	15	10
24S24.6HCM	9	36	7.10	24	6.26
48S3.30HCM	18	75	2.45	3.3	30
48S5.30HCM	18	75	3.60	5	30
48S12.12HCM	18	75	3.57	12	12.5
48S15.10HCM	18	75	3.50	15	10
48S24.6HCM	18	75	3.50	24	6.26

To order with optional DIN Rail Mount specify part number followed by -DIN. i.e. 24S3.30HCM-DIN.

To order RoHS, add (RoHS) to part number.

A thermal management device, such as a heat sink is required to ensure proper operation of this device. The thermal management medium is required to maintain baseplate temperature < 100°C



# 150 WATT HCM CHASSIS MOUNT DC/DC CONVERTERS



Unless otherwise stated, these specifications apply for case temperature  $T_c=25\pm 2^\circ\text{C}$ , nominal input voltage, and rated full load. (1)

Input Parameters								
Model		24S3.30HCM	24S5.30HCM	24S12.12HCM	24S15.10HCM	24S24.6HCM	Units	
Voltage Range	MIN	9					V	
	TYP	24						
	MAX	36						
Input Overvoltage (100 ms)	MAX	50					V	
Input Ripple Rejection (120Hz)	TYP	60					dB	
Undervoltage Lockout		Yes						
Input Reverse Voltage Protection		Yes						
Input Current	No Load	TYP	35	35	35	35	35	mA
	100% Load	TYP	5.0	7.26	7.18	7.10	7.10	A
Inrush Current	MAX	0.5					A <sup>2</sup> s	
Reflected Ripple, 12 $\mu$ H Source Impedance (3)	TYP	30					mA P-P	
Efficiency	TYP	78	80	85	86	86	%	
Switching Frequency	TYP	260					kHz	
Recommended Fuse		(2)					A	

Input Parameters								
Model		48S3.30HCM	48S5.30HCM	48S12.12HCM	48S15.10HCM	48S24.6HCM	Units	
Voltage Range	MIN	18					V	
	TYP	48						
	MAX	75						
Input Overvoltage (100 ms)	MAX	80					V	
Input Ripple Rejection (120Hz)	TYP	60					dB	
Undervoltage Lockout		Yes						
Input Reverse Voltage Protection		Yes						
Input Current	No Load	TYP	25	25	25	25	25	mA
	100% Load	TYP	2.45	3.60	3.57	3.50	3.50	A
Inrush Current	MAX	0.5					A <sup>2</sup> s	
Reflected Ripple, 12 $\mu$ H Source Impedance (3)	TYP	30					mA P-P	
Efficiency	TYP	81	85	88	88	89	%	
Switching Frequency	TYP	260					kHz	
Recommended Fuse		(2)					A	

\* Absolute Maximum Ratings. Caution: Stresses in excess of the Absolute Maximum Ratings can cause permanent damage to the device (see Note 1.)



# 150 WATT HCM CHASSIS MOUNT DC/DC CONVERTERS



Output Parameters								
Model		24S3.30HCM 48S3.30HCM	24S5.30HCM 48S5.30HCM	24S12.12HCM 48S12.12HCM	24S15.10HCM 48S15.10HCM	24S24.6HCM 48S24.6HCM	Units	
Output Voltage		3.3	5	12	15	24	V	
Output Voltage Setpoint Accuracy	MAX	±1						%
Turn On Overshoot Min-Max Load	TYP	0						%
Temperature Coefficient	TYP MAX	0.005 0.01	0.003 0.005	0.003 0.005	0.003 0.005	0.003 0.005	%/°C	
Noise (8)	TYP TYP	75 20	75 20	150 60	150 60	250 100	mV P-P mV RMS	
Load Current (4)	MIN MAX	3 30	3 30	1.25 12.5	1 10	0.626 6.26	A	
Load Transient Overshoot (7)	TYP	3						%
Load Transient Recovery Time (6)	TYP	200						µs
Load Regulation (5) Min-Max Load	TYP MAX	0.02 0.2						%
Line Regulation Vin = Min-Max	TYP MAX	0.01 0.1						%
Overvoltage Protection (OVP) Threshold OVP Type - Non-latching Open Loop Overvoltage Clamp	MIN MAX	115 135						%
Output Current Limit Vout = 90% of Vout-nom	TYP	120						%
Output Short Circuit Current Vout = 0.25V	TYP MAX	140 150						%

## Notes:


- (1) Refer to the CALEX Application Notes for the definition of terms, measurement circuits, and other information.
- (2) Refer to the CALEX Application Notes for information of fusing. For inrush current, refer to the specifications above.
- (3) 100µF capacitor connected between the two "Input" terminals. Then insert current sensor in series with 1.0µH inductor between 100µF and the source. The reflected ripple current is measured over a 5 Hz to 20 MHz bandwidth. (current sensor is located between the converter input terminal and the 1.0 µH inductor)
- (4) Optimum performance is obtained when this power supply is operated within the minimum to maximum load specifications. No damage to the module will occur when the output is operated at less than minimum load, however, below minimum load the dynamic response will degrade. Operation below minimum load is not recommended.
- (5) Load Regulation is defined as the output voltage change when changing load current from a maximum to minimum.
- (6) Load Transient Recovery Time is defined as the time for the output to settle from a 50% to 75% step load change to a 1% error band (rise time of step = 2µs).
- (7) Load Transient Overshoot is defined as the peak overshoot during a transient as defined in the Note 6 above.
- (8) Noise is measured per the CALEX Application Notes. Output noise is measured with a 10µF tantalum capacitor in parallel with a 0.1µF ceramic capacitor connected across the output terminals. Measurement bandwidth is 0-20MHz.
- (9) When an external ON/OFF switch is used, such as open collector switch, logic high requires the switch to be high-impedance. Switch leakage currents greater than 10µA may be sufficient to trigger the ON/OFF to the logic-low state.
- (10) Most switches would be suitable for the logic ON/OFF control. In case there is a problem you can make the following estimations and then leave some margin.  
When open collector is used for logic high, "Open Circuit Voltage at ON/OFF Terminal", "Output Resistance" and "External Leakage Current Allowed for Logic High" are used to estimate the high impedance requirement of open collector.  
When switch is used for logic low, "Open Circuit Voltage at ON/OFF Terminal", "Output Resistance" and "LOW Logic Level" are used to estimate the low impedance requirement of the switch.
- (11) Do not immerse in liquid. Converters are not hermetically sealed.
- (12) Input impedance on these units needs to be kept to a minimum. The 9-36Vdc DC units need a maximum input impedance of 0.135 Ohms and the 18-75Vdc DC units need a maximum input impedance of 0.54 Ohms. In order to support this requirement, the 9-36Vdc DC units need 55 µF of capacitance (low ESR) for every 1.0 µH of inductance between the power source and the DC/DC converter. The 18-75Vdc DC units need 3.5µF of capacitance (low ESR) for every 1.0 µH of inductance between the power source and the DC/DC converter. Inductance includes all sources and should take into account input power lines.
- (13) Specifications subject to change without notice.
- (14) RoHS Compliance:  
See Calex Website [www.calex.com/RoHS.html](http://www.calex.com/RoHS.html) for the complete RoHS Compliance statement.  
The RoHS marking is as follows.



# 150 WATT HCM CHASSIS MOUNT DC/DC CONVERTERS




General Specifications			
All Models			Units
<b>ON/OFF Function</b>			
HIGH Logic Level or Leave ON/OFF Terminal Open	MIN	3.0	VDC
External Leakage Current Allowed for Logic High (9)	MAX	10	µA
Input Diode Protection Voltage	MAX	50	VDC
LOW Logic Level or Tie ON/OFF Terminal to -INPUT	MAX	1.0	VDC
Sinking Current for Logic Low	MAX	500	µA
Open Circuit Voltage at ON/OFF Terminal (10)	TYP	2.3	VDC
Output Resistance	TYP	3	k Ω
Idle Current (Module is OFF)	TYP	8	mADC
Turn-on Time to 1% error	TYP	60	ms
Logic	HIGH - Module ON LOW - Module OFF		
<b>Output Voltage Remote Sensing</b>			
Maximum Voltage Drops on Leads	MAX	10	%
Line Regulation under remote sensing	TYP MAX	0.02 0.1	%
Load Regulation under remote sensing	TYP MAX	0.05 0.2	%
<b>Output Voltage Trim</b>			
Trim Range	MIN MAX	-10 +10	% of Vout
Input Resistance	TYP	10	kΩ
Open Circuit Voltage	TYP	2.5	V
<b>Trim Limit</b>			
Maximum Output Voltage	MAX	110	% of Vout
<b>Isolation</b>			
Input to Output Isolation 10µA Leakage Vnom = 24V Vnom = 48V	MAX MAX	700 1544	VDC VDC
Input to Output Resistance	MIN	10	MΩ
Input to Output Capacitance	TYP	1600	pF
<b>Environmental</b>			
Calculated MTBF, Bellcore Method 1, Case 1	>1,000,000		h
Case Operating Temperature Range	MIN MAX	-40 100	°C
Storage Temperature	MIN MAX	-40 120	°C
Thermal Impedance	TYP	3	°C/W
Thermal Shutdown Case Temperature (Auto Restart)	MIN TYP	100 110	°C
<b>General</b>			
Unit Weight with -DIN Option	TYP	13.28 oz (378 gm) 13.92 oz (396 gm)	
Case Dimension	4.3" x 3.2" x 1.0"		
<b>Agency Approvals:</b>			
UL	IEC 60950-1 and EN60950-1		

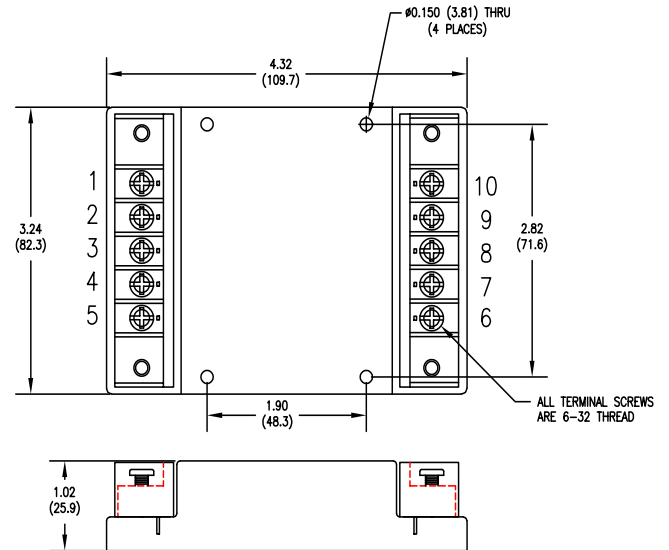

Tolerance All dimensions are typical in inches (mm) unless otherwise noted:  
Tolerance: x.xx in ±0.02 in (x.x mm ±0.5 mm)

Terminal No.	Function	Terminal No.	Function
1	+Input	6	-Output
2	On/Off	7	-Sense
3	N/C	8	Trim
4	Case	9	+Sense
5	-Input	10	+Output

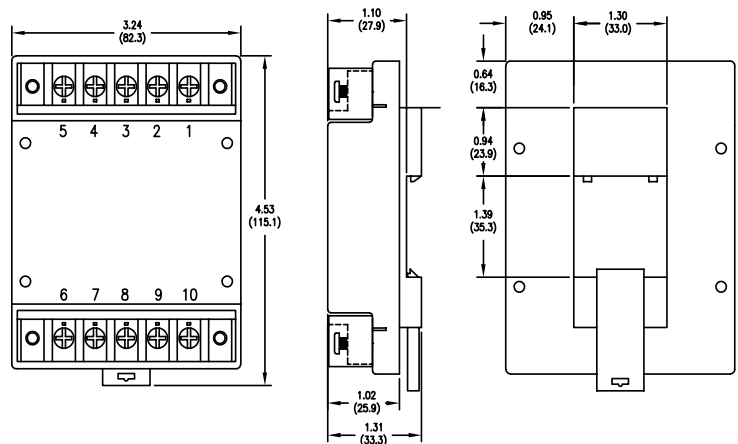

Optional Din Mount

