


## TANTALUM -A - SIZE SMD CAPACITORS BOARD ADAPTER

Board pcb adapter with holes for 4 pins connector, (serial in line), for breadboard testing of prototypes with SMD TANTALUM CAPACITORS size A. Can be used also for packages as: 1206, Minimelf, Quadromelf, SOD123 or SOD123F.

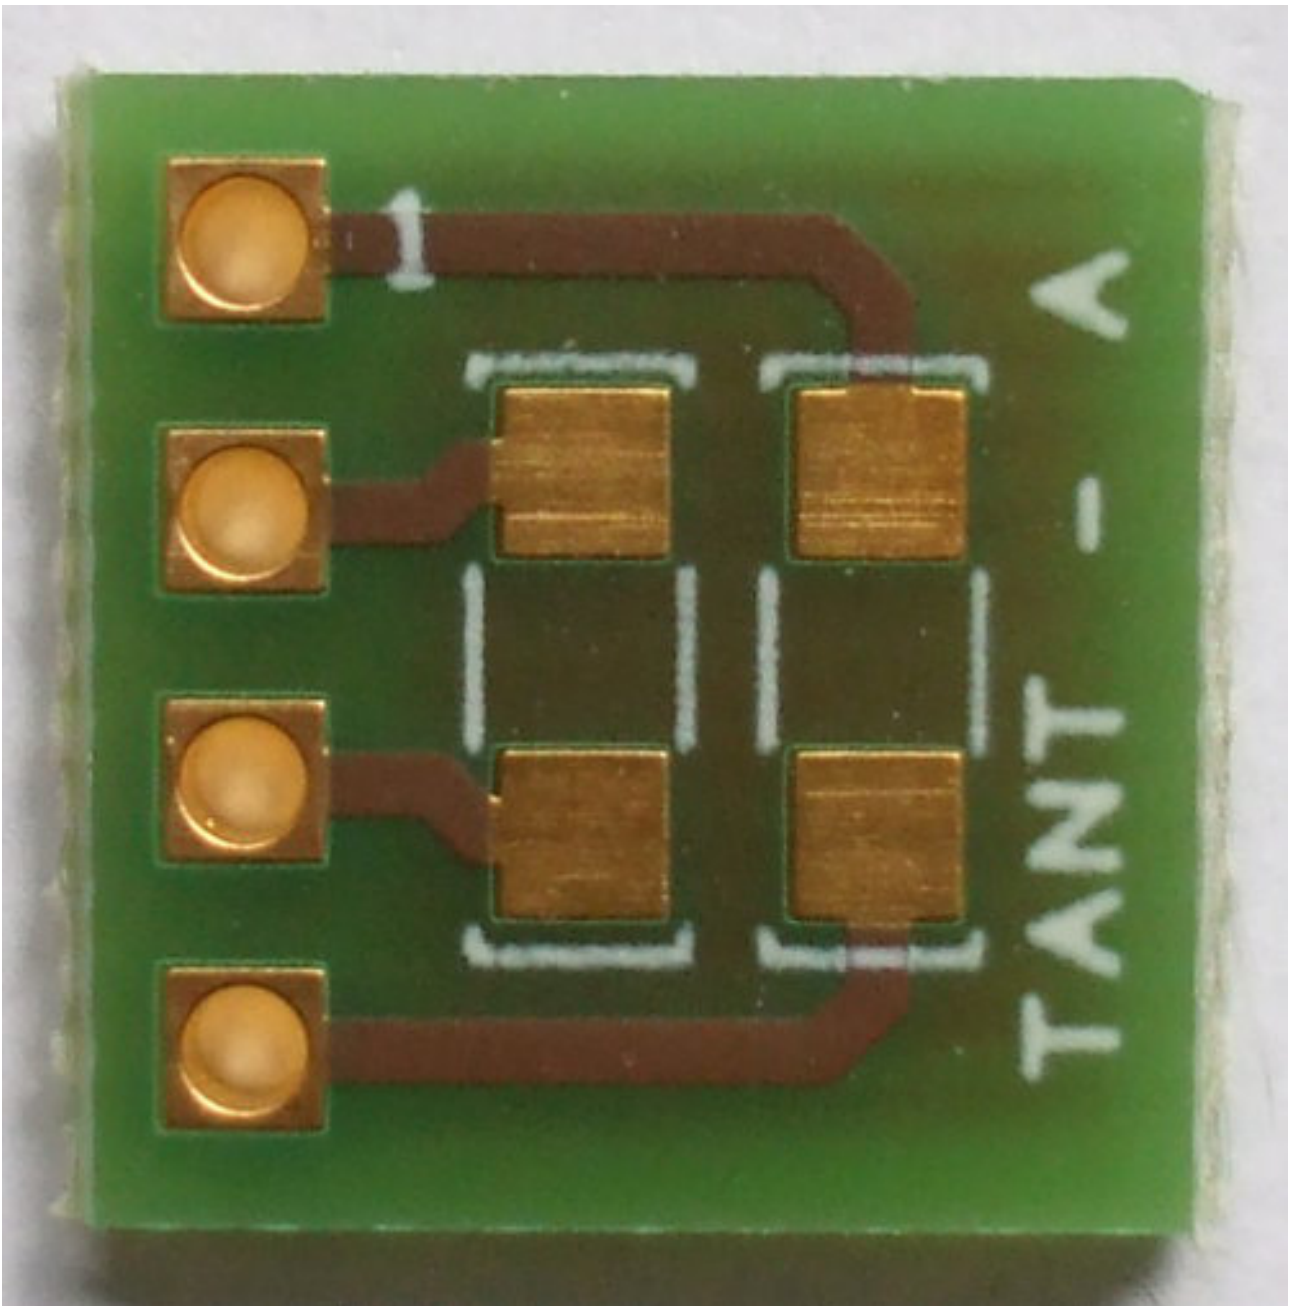


## Our pcb breadboard, compatible with a SIL-4 connector:

<b>Pitch Spacing:</b>	2.54mm
<b>Board Material:</b>	FR4 Epoxy Fibreglass
<b>Hole Diameter:</b>	0,95 mm
<b>Board Height:</b>	11mm
<b>Board Width:</b>	11mm
<b>Board Thickness:</b>	1.5mm
<b>Copper Coating :</b>	chem. Niquel Gold
<b>Copper Thickness:</b>	35µm
<b>No. of Copper Sides:</b>	2
<b>Solder mask</b>	yes
<b>ROHS</b>	Conform

## Our ref: 02512A

**CAD view :** Simulation of the SMD packages that can be used in this adapter, the adapter pcb and a 10mm rule, all in the same scale.

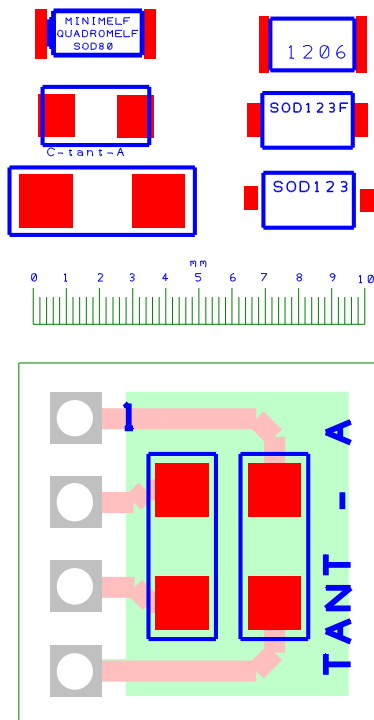

**Applications of this adapter:** small pcb board for hand soldering prototypes with up to two SMD components.

Compatible with the following packages: tantalum A capacitors, micromelf, SOD123, SOD123F or 1206 packages.

**OUR SITE**

**OUR E-SHOP**

[www.breadboard-adapters.com](http://www.breadboard-adapters.com)

*fernteix*