



● **FEATURES 特性**



1.Low power loss.低功率损耗。 2.Epoxy resin coating.环氧树脂涂料。

● **APPLICATIONS 用途**

Useful in a wide variety of transformer choke coil,filter.

用于变压器的阻流线圈，过滤器。

● **PART NUMBERING SYSTEM 品名系统**

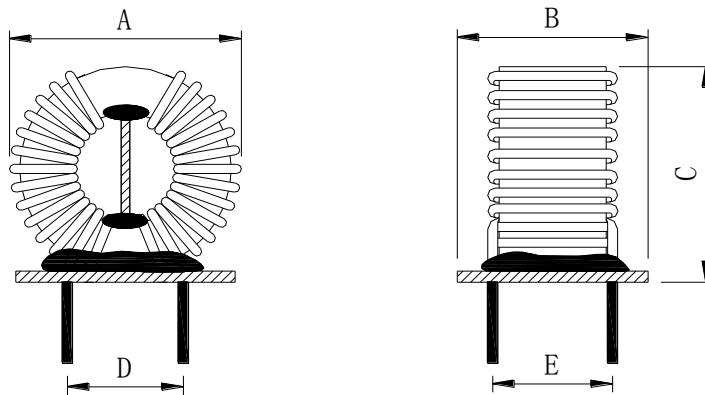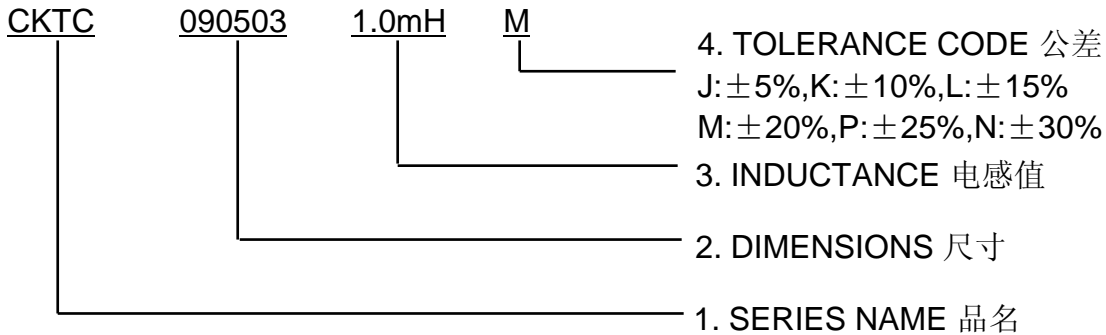

Unit: mm

TYPE	INDUCTANCE	A	B	C	D	Work Frequency
T8*4*3	0.2mH-1.0mH	12.0	7.0	14.0	5.0	10.0-100.0KHZ
T9*5*3	0.8mH-3.0mH	13.0	7.0	15.0	5.0	10.0-100.0KHZ
T10*6*5	0.8mH-3.1mH	14.0	9.0	16.0	6.0	10.0-100.0KHZ
T12*6*4	1.5mH-4.0mH	16.0	8.5	18.0	6.0	10.0-100.0KHZ
T14*9*5	1.5mH-4.5mH	18.0	10.0	20.0	8.0	10.0-100.0KHZ
T16*9*5	1.8mH-5.0mH	20.0	10.0	22.0	8.0	10.0-100.0KHZ
T18*10*8	2.5mH-6.0mH	23.0	13.0	25.0	12.0	10.0-100.0KHZ
T20*10*10	3.0mH-10.0mH	24.0	15.0	26.0	13.0	10.0-100.0KHZ
T22*14*8	3.5mH-12.0mH	26.0	13.0	28.0	12.0	10.0-100.0KHZ
T25*15*10	5.0mH-20.0mH	30.0	15.0	32.0	13.0	10.0-100.0KHZ
T25*15*13	5.0mH-25.0mH	30.0	18.0	32.0	15.0	10.0-100.0KHZ
T31*19*13	3.0mH-25.0mH	36.0	18.0	38.0	16.0	10.0-100.0KHZ
T38*19*13	3.0mH-25.0mH	44.0	18.0	46.0	16.0	10.0-100.0KHZ
T48*30*15	10.0mH-30.0mH	54.0	20.0	56.0	18.0	10.0-100.0KHZ
T78*50*16	10.0mH-50.0mH	88.0	25.0	90.0	18.0	10.0-100.0KHZ
T85*55*25	10.0mH-50.0mH	96.0	40.0	96.0	30.0	10.0-100.0KHZ
T102*65*20	10.0mH-50.0mH	115.0	40.0	115.0	30.0	10.0-100.0KHZ