


■PR-2型(2つ穴)

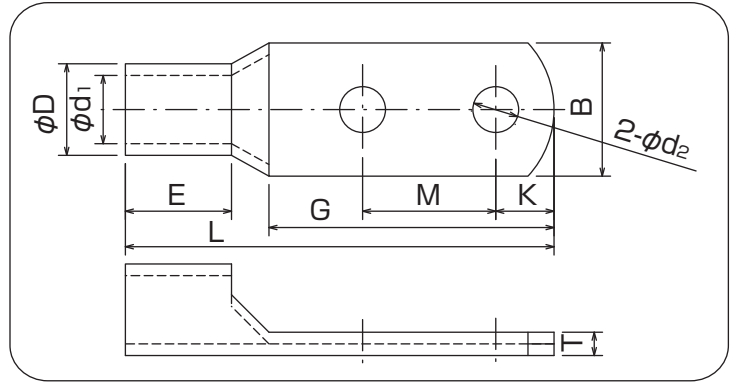

RoHS

単位:mm

呼 び	ϕd_2	(B)	L	K	M	G	E	ϕD	ϕd_1	(T)	電線抱合容量(参考)	適合工具					
											燃線mm ²						
PR2-14	4	4.3	14	46	6.5	12	29	14	8.9	5.8	3	10.52~16.78	214A	9H-60 EP-1460 REC-Li60			
	5	5.3															
	6	6.4															
PR2-22	5	5.3	16	53	7	16	35	15	11.3	7.7	3.6	16.78~26.66	EP-150A REC-150F REC-Li200		12号A 12号H		
	6	6.4															
	8	9															
PR2-38	5	5.3	19	62	8.5	16	37.5	18	13.2	9.4	3.8	26.66~42.42	EP-150A REC-150F REC-Li200			12号A 12号H	
	6	6.4															
	8	9															
PR2-60S PR2-60L	10	11	22	86 90	13	28 32	56 60	20	15.4	11.4	4	42.42~60.57	REC-Li325				12号A 12号H
PR2-70S PR2-70L	10	11	25	90 94	13.5	28 32	57 61	22	17.5	13.3	4.3	60.57~76.28					
PR2-80S PR2-80L	10	11	27.5	95 99	13.5	28 32	58 62	24.5	19.4	14.5	5.1	76.28~96.3					
PR2-100S PR2-100L	10	11	31.5	99 103	14.5	28 32	59 63	25.5	22	16.4	5.7	96.3~117.2					
PR2-150S PR2-150L	12	14	38	120 128	16.5	32 40	68 76	34.5	26.4	19.5	7	117.2~152.05					
PR2-180S PR2-180L	12	14	41	124 132	16.5	32 40	70 78	36.5	28.5	21	7.7	152.05~192.6					
PR2-200S PR2-200L	12	14	46	133 141	20.5 21	32 40	78 86	37	32.2	24	8.5	192.6~242.27					
PR2-325S PR2-325L	12	14	53	144.5 152.5	20.5 23.5	32 40	83.5 91.5	42	37	28	9	242.27~325.0					

(注意) 各部の寸法は予告なく変更することがあります。()付き寸法は参考寸法を意味します。