

MURPHYMATIC® Generator Engine Controller

A-9010B
Revised 05-03
Catalog Section 75
(00-02-0095)

Model Series 900

Description

The MURPHYMATIC® Generator Engine Control System, Series A900 is designed to meet the requirements of the engine control, shutdown and alarm section of NFPA-110 "Emergency And Standby Power Systems". The controller also meets the minimum requirements of NFPA-99 "Health Care Facilities" and the Canadian standard CAN/CSA-C282-M89 "Emergency Electrical Power Supply for Buildings" for engine control, shutdown and alarm systems. By combining one of the A900 series controls with generator instruments, a complete engine generator control panel meeting the above specifications can be provided.

Three basic models are available:

- **A901** for NFPA-110 Level 1
- **A902** for NFPA-110 Level 2
- **A903** for NFPA-110 Level 2 plus seven unlabeled alarm LED's for customer specified alarms.

All models are for automatic start and stop operation. Specify 12 VDC or 24 VDC. Each model consists of a Control/Display module and a plug-in Relay module.

This compact control is suitable for either 2-cycle or 4-cycle engines. Models designated for 2-cycle engines include alarms for "Air Damper Closed" and an "Overspeed Relay" to operate the air shutoff solenoid for overspeed shutdown.

Features

Features for each model are provided according to NFPA-99, NFPA-110, Canadian standard CAN/CSA-C282-M89. Typical features include:

- LED Visual Alarms
- Built-in Off-Auto-Test selector
- Lamp Test Pushbutton
- Adjustable Cycle Cranking
- Built-in Crank and Adjustable Disconnect Speed Switch
- Auxiliary Crank Disconnect Circuit
- Shutdown Bypass for Startup
- Built-in Overspeed Switch
- Nine (9) Alarm Indicating Circuits
- Loss of Speed Signal Shutdown
- Remote Shutdown
- Alarm Silence Pushbutton
- Alarm Relays per NFPA 110

- **Complete Controller—NO add-ons necessary**
- **Selectable Cycle Cranking**
- **Overcrank Protection**
- **Seven (7) First-out Shutdown Circuits**
- **Outputs for remote alarms**

Model A901-2



Specifications

Enclosure: General purpose intended for mounting in a standard electrical enclosure for indoor use.

Power Requirements: 12 VDC or 24 VDC (specify), negative ground.

Sensor Input: Normally open dry contact, 2 mA maximum; 8 VDC or less.

Speed signal from magnetic sensor or engine battery charging alternator; 2 volts RMS; 25-10,000 hertz.

Outputs:

Control/Display Module

For remote alarm and shutdown indication, sinking transistors that close to negative supply; 1 amp, 30 VDC maximum.

For an auxiliary starter contactor, transistor that closes to a positive supply (source).

Relay Module


3 control relays; 7 amp, 30 VDC inductive.

3 alarm relays; 7 amp, 30 VDC inductive.

Field Wiring: Barrier terminal blocks rated 15 amp, 300 volts.

Operating Temperature: 4°F to 158°F (-20°C to 70°C).

Dimensions

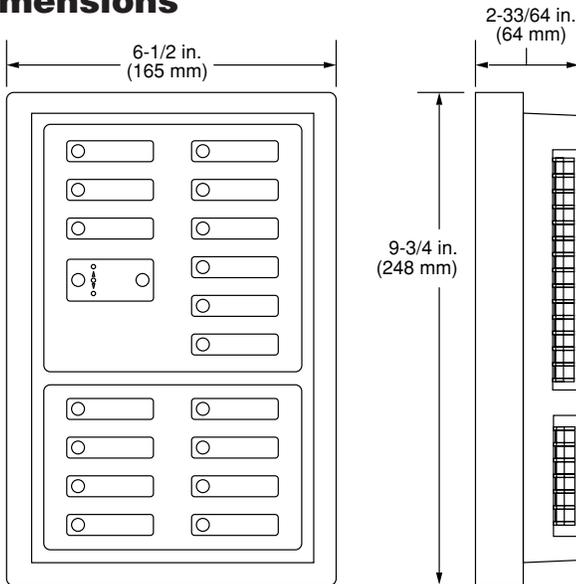


Approximate Shipping Weight: 4 lbs (1.8 kgs)

Approximate Shipping Dimensions:

12 in. (305 mm) x 7-1/2 in. (191 mm) x 5-1/2 in. (140 mm)

How to Order

To order the A900 that will suit your needs, please use the part number designation diagram below.

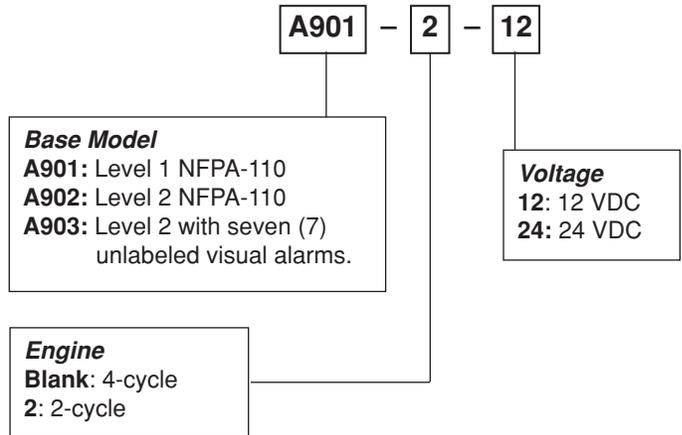

Warranty

A limited warranty on materials and workmanship is given with this FW Murphy product. A copy of the warranty may be viewed or printed by going to www.fwmurphy.com/support/warranty.htm

MGC900 Series Controller

- Series A900 controllers are available—installed in a MGC Generator Set Control Panel. These MGC panels include one of the A900 series controllers, AC meters and selectors switches, engine instruments and shutdown controls; all in a NEMA 1 drip-proof enclosure.



FW Murphy
P.O. Box 470248
Tulsa, Oklahoma 74147 USA
+1 918 317 4100
fax +1 918 317 4266
e-mail sales@fwmurphy.com
www.fwmurphy.com

CONTROL SYSTEMS & SERVICES DIVISION
P.O. Box 1819; Rosenberg, Texas 77471; USA
+1 281 633 4500 fax +1 281 633 4588
e-mail sales@fwmurphy.com

MURPHY DE MEXICO, S.A. DE C.V.
Blvd. Antonio Rocha Cordero 300, Fracción del Aguaje
San Luis Potosí, S.L.P.; México 78384
+52 444 8206264 fax +52 444 8206336
Villahermosa Office +52 993 3162117
e-mail ventas@murphymex.com.mx
www.murphymex.com.mx

FRANK W. MURPHY, LTD.
Church Rd.; Laverstock, Salisbury SP1 1QZ; U.K.
+44 1722 410055 fax +44 1722 410088
e-mail sales@fwmurphy.co.uk
www.fwmurphy.co.uk

MURPHY SWITCH OF CALIFORNIA
41343 12th Street West
Palmdale, California 93551-1442; USA
+1 661 272 4700 fax +1 661 947 7570
e-mail sales@murphyswitch.com
www.murphyswitch.com

MACQUARRIE CORPORATION
1620 Hume Highway
Campbellfield, Vic 3061; Australia
+61 3 9358 5555 fax +61 3 9358 5558
e-mail murphy@macquarrie.com.au



In order to consistently bring you the highest quality, full featured products, we reserve the right to change our specifications and designs at any time.