

Infrared Illuminator Enclosure

EN-2070 HF



EN-2070 HF

EN-2070 Series Infrared Illuminator Enclosure


SUBJECT: TECHNICAL DATA CONTAINS:

GENERAL:

Entirely made of die-cast aluminum alloy Light ivory powder coating finished Supplied with Fully-cable-managed bracket And accessories for camera/lens installation

MECHANICAL:

- a. Fully-cable-managed bracket: Entirely made of die-cast aluminum alloy Light ivory powder coating finished.
IK 10 Certified: Vandal-Proof

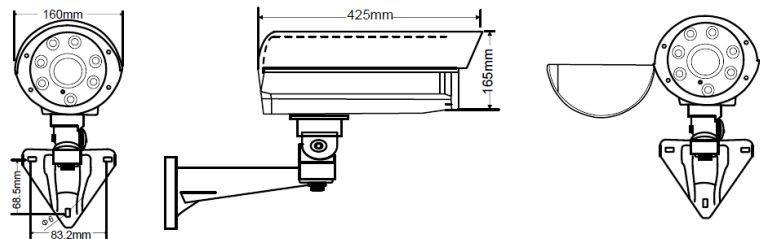

Camera mounting space w/o power supply: 282 (L) x 106 (W) x 96(H) mm
Camera mounting space with power supply: 238 (L) x 106 (W) x 96(H) mm

ELECTRIC:

Infrared LED: 6PCS

and beam angle 45°, 3 PCS

IR Light Distance: 50M-70M

Window Heater: Turn on at 18°C+/-3°C; Turn off at 28°C+/-3°C

12V DC Blower Turn on at 35°C+/-3°C Turn off at 25°C+/-3°C

Operating temperature: -40° to 50°

Power Supply:

Input Voltage: 90-240Vac (+/-10%)

Input Current: 2.0A/110V 1.0A/220V

(+/-10%) Output Voltage: 12A

Output Current: 5A

Ripple below 200mV Conform with safety standard

EN-2070 Series Infrared Illuminator Enclosure

ACCESSORIES:

a. Fully-cable-managed bracket:

Entirely made of die-cast aluminum alloy Light ivory powder coating finished



b. Kit Pack

Anchor	3 pcs
Hexagonal Stainless Steel Screw	3 pcs
Stainless Steel Washers	4 pcs
Nylon Washers	4 pcs
L Type Hexagonal Wrench	1 pcs
For camera	
Plastic Pad	1 pcs
Plastic Washer	2 pcs
Hexagonal Stainless Steel Screw	1 pcs
Hexagonal Stainless Steel Screw	1 pcs

STANDRD SPECIFICATIONS:

CE in compliance with EN 55022: 1988 EN 50130-4:1995

FCC in compliance with ANSI C 63.4

IP66 in compliance with IEC 60529

RoHS & SVCH compliance

LED in compliance with IEC 60825-1: 1993+A1: 1997+A2: 2001

/ EN 60825-1: 1994+A1: 2002 + A2: 2001