



SPLIT-CORE CURRENT TRANSFORMER


JC08W-mA Series



cULus
E344623



HOW TO USE

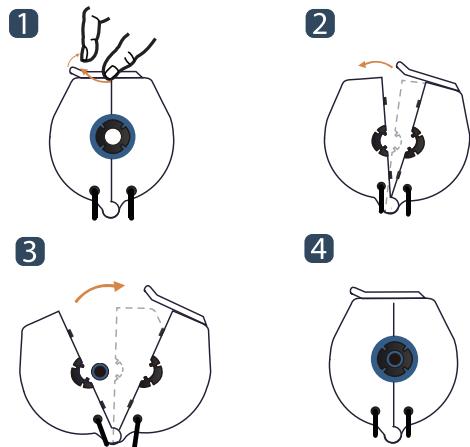

APPLICATIONS

- Energy sub - meter
- Power meters
- Power quality monitoring
- HVAC&Pumps, etc
- Distributed measurement system

FEATURES

- Ø5~Ø8.5mm sensing aperture for non-contact measurement

BENEFITS

- Small-size, light-weight
- Simple Installation

NOTICE

- Core contact surface is waterproofed, however if it gets rusty, you could reuse after removing rusts with spraying WD-40 or CRC5-56 on the rusted side.
- Do not use any other chemicals except WD-40 or CRC5-56 on housing or any parts.
- Additionally, CTs are deliverable with customized output lead cable.
- Silicone rubber reducing sleeves for central positioning of thinner conductors (5.5mm~6.5mm) are optional available.


SPECIFICATION

(F=50/60Hz)

Model	JC08W-25 Ø8.5	JC08W-30 Ø8.5
Current Ratio	25A/10mA	30A/10mA
Current Range	0.01~42A (RL=1Ω)	0.01~45A (RL=1Ω)
Max Continuous Current	70A	70A
Nominal Phase Angle Error	+1±1°	+1±1°
Nominal Linearity Error	-1.5 ~ ±0.5%	-0.5 ~ ±1%
Turns Ratio	2500:1	3000:1
DCR	200±20Ω	240±24Ω
Protection Level	Over-voltage protection circuit is not included, please pay careful attention during installation.	
Insulation Category	CAT III 600V AC / PD2	
Operating Condition	-20°C~+50°C, ≤85%RH, No condensation, In-house & Any direction installable	
Storage Condition	-30°C~+90°C, ≤85%RH, No condensation	



ACCURACY DATA

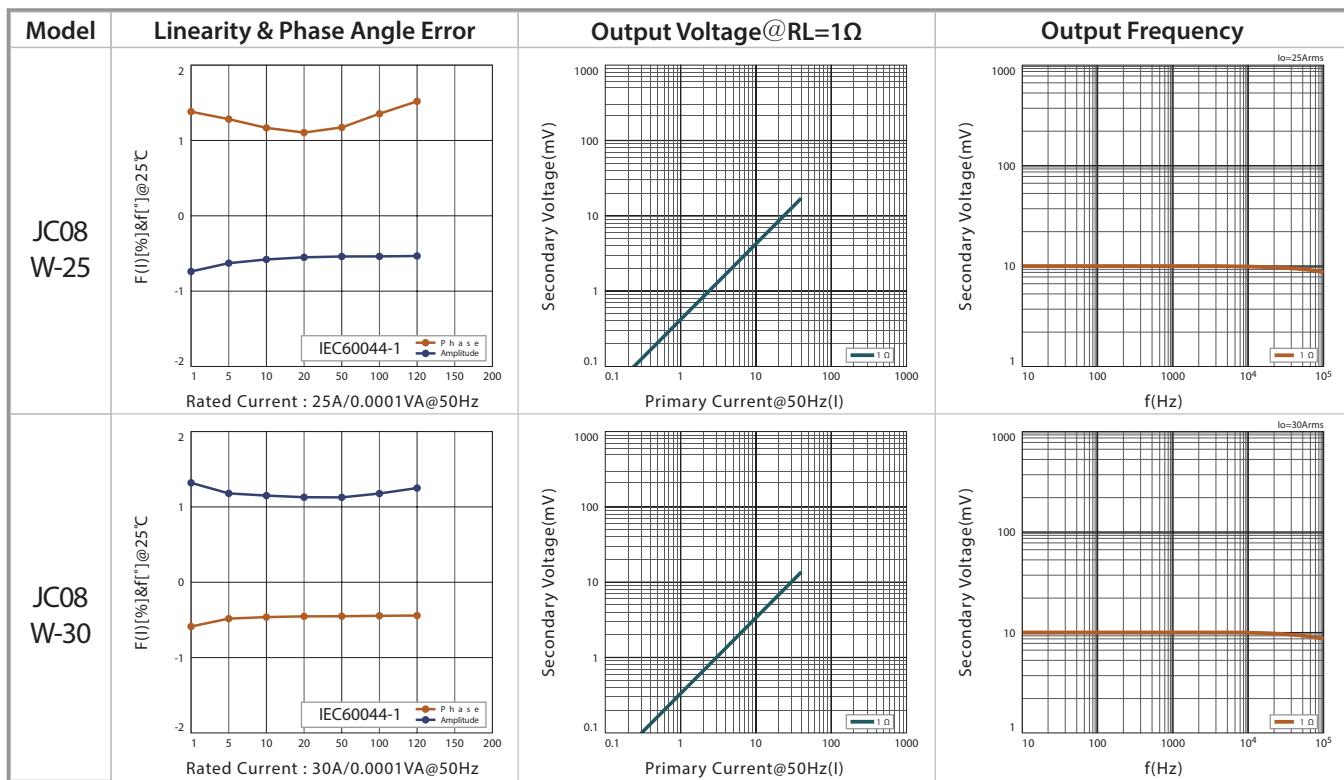

APPLICATIONS / DIMENSIONS

