



US007817888B2

(12) **United States Patent**
Volodin et al.

(10) **Patent No.:** **US 7,817,888 B2**
(45) **Date of Patent:** **Oct. 19, 2010**

(54) **BRAGG GRATING ELEMENTS FOR OPTICAL DEVICES**

(75) Inventors: **Boris L. Volodin**, West Windsor, NJ (US); **Vladimir Sinisa Ban**, Princeton, NJ (US)

(73) Assignee: **PD-LD, Inc.**, Pennington, NJ (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 209 days.

(21) Appl. No.: **12/329,104**

(22) Filed: **Dec. 5, 2008**

(65) **Prior Publication Data**

US 2009/0080834 A1 Mar. 26, 2009

Related U.S. Application Data

(62) Division of application No. 11/407,742, filed on Apr. 19, 2006, now Pat. No. 7,477,818, which is a division of application No. 10/390,521, filed on Mar. 17, 2003, now Pat. No. 7,125,632.

(60) Provisional application No. 60/365,032, filed on Mar. 15, 2002.

(51) **Int. Cl.**
G02B 6/34 (2006.01)

(52) **U.S. Cl.** **385/37; 385/16; 385/17; 372/20**

(58) **Field of Classification Search** None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,396,343 A 8/1968 Gustaaf 372/107

3,580,657 A	5/1971	Sheridon	
3,603,690 A	9/1971	Hard	356/521
3,647,289 A	3/1972	Weber	
3,936,143 A	2/1976	Sato	350/96 C
4,013,338 A	3/1977	Sato et al.	350/3.5
4,017,318 A	4/1977	Pierson et al.	
4,057,408 A	11/1977	Pierson et al.	65/18
4,095,875 A	6/1978	Lee et al.	350/320
4,215,937 A	8/1980	Borsuk	356/73.1
4,239,333 A	12/1980	Dakss et al.	350/96.21
4,398,797 A	8/1983	Wedertz et al.	385/137
4,514,053 A	4/1985	Borrelli et al.	350/162.2
4,747,657 A	5/1988	Chaoui et al.	350/96.2
4,942,102 A	7/1990	Keys et al.	430/1

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0 310 438 A1 4/1989

(Continued)

OTHER PUBLICATIONS

U.S. Appl. No. 10/390,521, filed Jul. 3, 2003, Volodin, et al.

(Continued)


Primary Examiner—David A Vanore

(74) *Attorney, Agent, or Firm*—Woodcock Washburn LLP

(57) **ABSTRACT**

Disclosed herein is a method for manufacturing three-dimensional Bragg grating elements. The method for manufacturing three-dimensional Bragg gratings may include forming a first Bragg grating element using a pair of recording beams. The method may also include using a single recording beam to replicate the first Bragg grating element to form a second Bragg grating element.

4 Claims, 18 Drawing Sheets

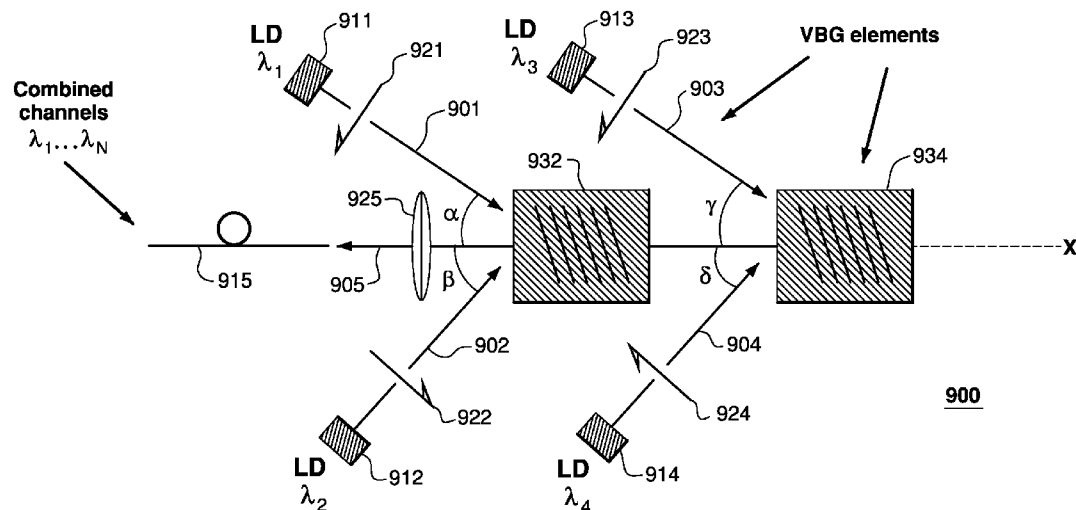

U.S. PATENT DOCUMENTS

4,943,126 A	7/1990	Lang et al.	359/12
5,115,338 A	5/1992	DiGiovanni et al.	359/337
5,335,098 A	8/1994	Leyva et al.	359/7
5,386,426 A	1/1995	Stephens	372/2
5,440,669 A	8/1995	Rakuljic et al.	359/7
5,452,124 A	9/1995	Baker	359/341.2
5,491,570 A	2/1996	Rakuljic et al.	359/7
5,548,676 A	8/1996	Savage	385/92
5,619,609 A	4/1997	Pan et al.	385/136
5,655,040 A	8/1997	Chesnoy et al.	385/37
5,684,611 A	11/1997	Rakuljic et al.	359/7
5,691,989 A	11/1997	Rakuljic et al.	372/20
5,777,763 A	7/1998	Tomlinson, III	359/130
5,796,096 A	8/1998	Rakuljic et al.	250/226
5,798,859 A	8/1998	Colbourne et al.	359/247
5,812,258 A	9/1998	Pierson	356/153
5,825,792 A	10/1998	Villeneuve et al.	372/32
6,055,250 A	4/2000	Doerr et al.	372/23
6,064,685 A	5/2000	Bissessur et al.	
6,093,927 A	7/2000	Wickham	250/227.23
6,122,043 A	9/2000	Barley	356/73.1
6,163,391 A	12/2000	Curtis et al.	359/29
6,184,987 B1	2/2001	Jang et al.	356/388
6,198,759 B1	3/2001	Broderick et al.	372/39
6,249,624 B1	6/2001	Putnam et al.	385/37
6,269,203 B1	7/2001	Davies et al.	385/24
6,285,813 B1	9/2001	Schultz et al.	385/37
6,385,219 B1	5/2002	Sonoda	372/28
6,385,228 B1	5/2002	Dane et al.	372/99
6,414,973 B1	7/2002	Hwu et al.	372/19
6,434,175 B1	8/2002	Zah	372/20
6,470,120 B2	10/2002	Greene et al.	385/52
6,524,913 B1	2/2003	Lin et al.	
6,529,675 B1	3/2003	Hayden et al.	385/141
6,580,850 B1	6/2003	Kazarinov et al.	385/28
6,586,141 B1	7/2003	Efimov et al.	430/1
6,673,493 B2	1/2004	Gan et al.	429/233
6,673,497 B2	1/2004	Efimov	
6,829,067 B2	12/2004	Psaltis et al.	359/15
7,031,573 B2	4/2006	Volodin et al.	385/37
7,125,632 B2	10/2006	Volodin et al.	
7,184,616 B2	2/2007	Mead et al.	385/10
7,248,617 B2	7/2007	Volodin et al.	372/102
7,298,771 B2	11/2007	Volodin et al.	
7,324,286 B1	1/2008	Glebov	
7,326,500 B1	2/2008	Glebov	
7,477,818 B2 *	1/2009	Volodin et al.	385/37
2001/0016099 A1	8/2001	Shin et al.	385/37
2001/0028483 A1	10/2001	Buse	359/15
2002/0012377 A1	1/2002	Suganuma et al.	372/98
2002/0045104 A1	4/2002	Efimov et al.	430/2
2002/0176126 A1	11/2002	Psaltis et al.	359/15
2002/0192849 A1	12/2002	Bullington et al.	438/22
2003/0174749 A1	9/2003	Capasso et al.	372/45
2003/0214700 A1	11/2003	Sidorin et al.	359/334
2003/0219205 A1	11/2003	Volodin et al.	385/37
2005/0018743 A1	1/2005	Volodin et al.	
2005/0207466 A1	9/2005	Glebov et al.	372/92
2005/0265416 A1	12/2005	Zucker et al.	372/50.12
2006/0029120 A1	2/2006	Mooradian et al.	372/102
2006/0123344 A1	6/2006	Volkov et al.	
2006/0156241 A1	7/2006	Psaltis et al.	715/730
2006/0256827 A1	11/2006	Volodin et al.	370/50.121

FOREIGN PATENT DOCUMENTS

EP	0 322 218 A3	6/1989
JP	4287001	10/1992
SU	178-429 A1	11/1990

WO

WO 03/036766

5/2003

OTHER PUBLICATIONS

- Borgman, V.A., et al., "Photothermal refractive effect in silicate glasses," *Sov. Phys. Dokl.*, Nov. 1989, 1011-1013.
- Churin, E.G., et al., "Design of free-space WDM router based on holographic concave grating," *IEEE Photonics Techn. Letts.*, Feb. 1999, 11(2), 221-223.
- Efimov, O.M., et al., "High-efficiency bragg gratings in photothermorefractive glass," *Applied Optics*, Feb. 1, 1999, 38(4), 619-627.
- Glebov, L.B., et al., "Pholychromic glasses-a new material for recording volume phase holograms," *Sov. Phys. Dokl.*, Oct. 1990, 35(10), 878-880.
- Glebov, L.B., "Photosensitive glass for phase hologram recording," *Glass Science and Technology*, 1998, 71C, 85-90.
- Hendow, S.T., "Crystal bragg gratings stabilize laser sources," *Laser Focus World*, Nov. 1996, S19-S24.
- Kogelnik, H., et al., "Coupled wave theory for thick hologram gratings," *The Bell System Technical Journal*, Nov. 1969, 48(9), 2909-2947.
- Liu, J., et al., "Modeling and design of planar slanted volume holographic gratings for wavelength-division-multiplexing applications," *Applied Optics*, Dec. 1, 1999, 6981-6986.
- Moslehi, B., et al., "Fiber-optic wavelength-division multiplexing and demultiplexing using volume holographic gratings," *Optics Letters*, Oct. 1, 1989, 1088-1090.
- Qiao, J., et al., "Dispersion-enhanced volume hologram for dense wavelength-division demultiplexer," *IEEE Photonics Technology Letts.*, Aug. 2000, 12(8), 1070-1072.
- Rakuljic, G.A., et al., "Volume holographic narrow-band optical filter," *Optical Engineering*, Oct. 1997, 36(10), 459-461.
- Sayano, K., "Holographic grating filters in optical glasses for C31 WDM networks," *Accuwave Corp., sponsored by Ballistic Missile Defense Organization*, May 1998, AFRL-SN-RS-TR-1998-81, Final Technical Report, 1-35, DL-1 —DL-3.
- Timofeev, F.N., et al., "Free-space grating multi/demultiplexer and wavelength-router for densely spaced WDM networks," *IEE*, Nov. 1-5, 1997, 372-373.
- Zhao, F., et al., "Reliable grating-based wavelength division (de)multiplexers for optical networks," *Opt. Eng.*, Jul. 2001, 40(7), 1204-1211.
- Zhao, F., et al., "Subpicometer accuracy laser wavelength sensor using multiplexed bragg gratings," *IEEE Photonics Technology Letts.*, Nov. 1997, 9(11), 1493-1495.
- Zhao, F., et al., "Ultraviolet Ca K-line narrow-bandwidth imaging filters based on holographic Bragg gratings in photorefractive materials," *Opt. Eng.*, Oct. 1997, 36(10), 2918-2921.
- Breer, S., et al., "Low-crosstalk WDM by bragg diffraction from thermally fixed reflection holograms in lithium niobate," *Electronics Letts.*, 1998, 34(25), 2419-2421.
- Dicing Solutions for DWDM optical filter applications; advertising brochure of *ADT Advanced Dicing Technologies*, Stockholm, Sweden, 2003, 2 pages.
- Rakuljic, G.A., et al., "Volume holographic narrow-band optical filter," *Optics Letts.*, 1993, 18(6), 459-461.
- Chang-Hasnain, C.J., et al., "High power with high efficiency in a narrow single-lobed beam from a diode laser array in an external cavity," *Appl. Phys. Lett.*, 1987, 50(21), 1465-1467.
- Datta, S., et al., "Modeling of nonideal volume Bragg reflection gratings in photosensitive glass using a perturbed transmission matrix approach," *IEEE J. of Quantum Electronics*, 2004, 40(5), 580-590.
- Goodman, J.W., "Introduction to fourier optics," *McGraw-Hill Co., Inc.*, 2nd Ed., 1996, 329-330.
- Moser, C., et al., "Volume Bragg grating devices," *Friday Morning*, 2003, 2, 644-645.
- Sakamoto, M., et al., "20 W CW monolithic AlGaAs (810nm) laser diode arrays," *Electronic Letts.*, 1992 28(2), 178-180.
- Volodin, B.L., et al., "High-resolution compact imaging holographic Bragg grating spectrometer," *CLEO*, 1998, 401-402.

- Yiou, S., et al., "Improvement of the spatial beam quality of laser sources with an intracavity Bragg grating," *Optics Letts.*, 2003, 28(4), 242-244.
- Dmitriyev, A.L., et al., "Volume holograms in the optical devices of optical-fiber data transmission systems, A review," *Telecommun. & Radio Eng.*, 1995, 49(12), 9-15.
- Sayano, K., et al., "Modular WDM add/drop multiplexers," *SPIE*, 1997, 3234, 102-107.
- Applicant calls to the Office's Attention, Application No.: 820/CAL/93, Filed Dec. 28, 1993, Inventors-Victor Leyva and George Rakuljic, "Method for Writing Reflection Mode Gratings in Photorefractive Materials in the Infrared," and U.S. Appl. No. 08/842,645, filed Apr. 15, 1997, Inventors- Koichi Sayano and F. Zhao, "High Resolution Holographic Image and Data Storage System." Applicant has no Further Information Regarding these References.
- Efimov, O.M. et al., "Diffraction Optical Elements in Photosensitive Inorganic Glasses", Proceedings of the SPIE, Inorganic Optical Materials III, Aug. 2, 2001, 39-47.
- Jansson, T. et al., "Lippmann-Bragg Broadband Holographic Mirrors", *J. of the Optical Soc. Of Am.*, 1991, 8(1), 201-211.
- Loiseaux, B. et al., "Characterization of Perpendicular Chirped Phase Volume Grating Pairs for Laser Stretching", *Optic Letters*, OSA, 1996, 21(11), 806-808.
- Remy, Lehrbuch der Anorganischen Chemie Band, 1960, 1.
- Scholes, S. R. Modern Glass Practice, 1975, 217.
- Shelby, J.E., "Introduction to Glass Science and Technology", *Royal Society of Chemistry*, 1997, 43.
- Harrison, J. et al., "Coherent Summation of Injection-Locked, Diode-Pumped Nd: YAG Ring Lasers", *Optics Letters*, Feb. 1998, 13(2), 111-113.
- Kozlov, V.A. et al., "All-Fiber Coherent Beam Combining of Fiber Lasers", *Optic Letters*, Dec. 15, 1999, 24(24), 1814-1816.
- Leger, J.R. et al., "Efficient Side Lobe Suppression of Laser Diode Arrays", *Appl. Phys. Lett.*, 1987, 50(16), 1044-1046.
- Leger, J.R. et al., "Coherent Beam Addition of GaAlAs Lasers by Binary Phase Gratings", *Appl. Phys. Lett.*, Apr. 1986, 48(14), 888-890.
- Leger, J.R. et al., "Coherent Laser Addition Using Binary Phase Gratings", *Applied Optics*, 1987, 26(20), 4391-4399.
- Menard, S. et al., "Highly Efficient Phase Locking and Extracavity Coherent Combination of Two Diode-Pumped Nd: YAG Laser Beams", *Optics Letters*, Dec. 15, 1996, 21(24), 1996-1998.
- Rodgers, B.C. et al., "Laser Beam Combining and Cleanup by Stimulated Brillouin Scattering in a Multimode Optical Fiber", *Optics Letters*, Aug. 15, 1999, 24(16), 1124-1126.
- Swanson, G.J. et al., "Aperture Filling of Phase-Locked Laser Arrays", *Optics Letters*, Apr. 1987, 12(4), 245-247.
- Veldkamp, W. B. et al., "Coherent Summation of Laser Beams Using Binary Phase Gratings", *Optics Letters*, May 1986, 11(5), 303-306.
- Mills, P., "Single-Mode Operation of 1.55 μm Semiconductor Lasers Using a Volume holographic Grating", *Electronic Letters*, Jul. 1985, 21(15), 648-649.
- In the United States District Court for the District of New Jersey, *PD-LD, Inc., v. Ondax, Inc.*, Case No.: 08-cv-03494, DRAFT Amended Answer to Complaint; Affirmative Defenses; Counterclaims and Jury Demand, Sep. 18, 2008, 34 pages.
- In the United States District Court for the District of New Jersey, *PD-LD, Inc., v. Ondax, Inc.*, Case No.: 08-cv-03494, Initial Disclosures of Defendant Ondax, Inc. Pursuant to FRCP 26(a)(1), Sep. 12, 2008, 10 pages.
- In the United States District Court for the District of New Jersey, *PD-LD, Inc., v. Ondax, Inc.*, Case No.: 08-cv-03494, Third Party Complaint by Defendant Ondax, Inc. Against Arasor International Limited and Jury Demand, Aug. 22, 2008, 9 pages.
- In the United States District Court for the District of New Jersey, *PD-LD, Inc., v. Ondax, Inc.*, Case No.: 08-cv-03494, Answer to Complaint: Affirmative Defenses; Counterclaims and Jury Demand, Aug. 13, 2008, 31 pages.

* cited by examiner

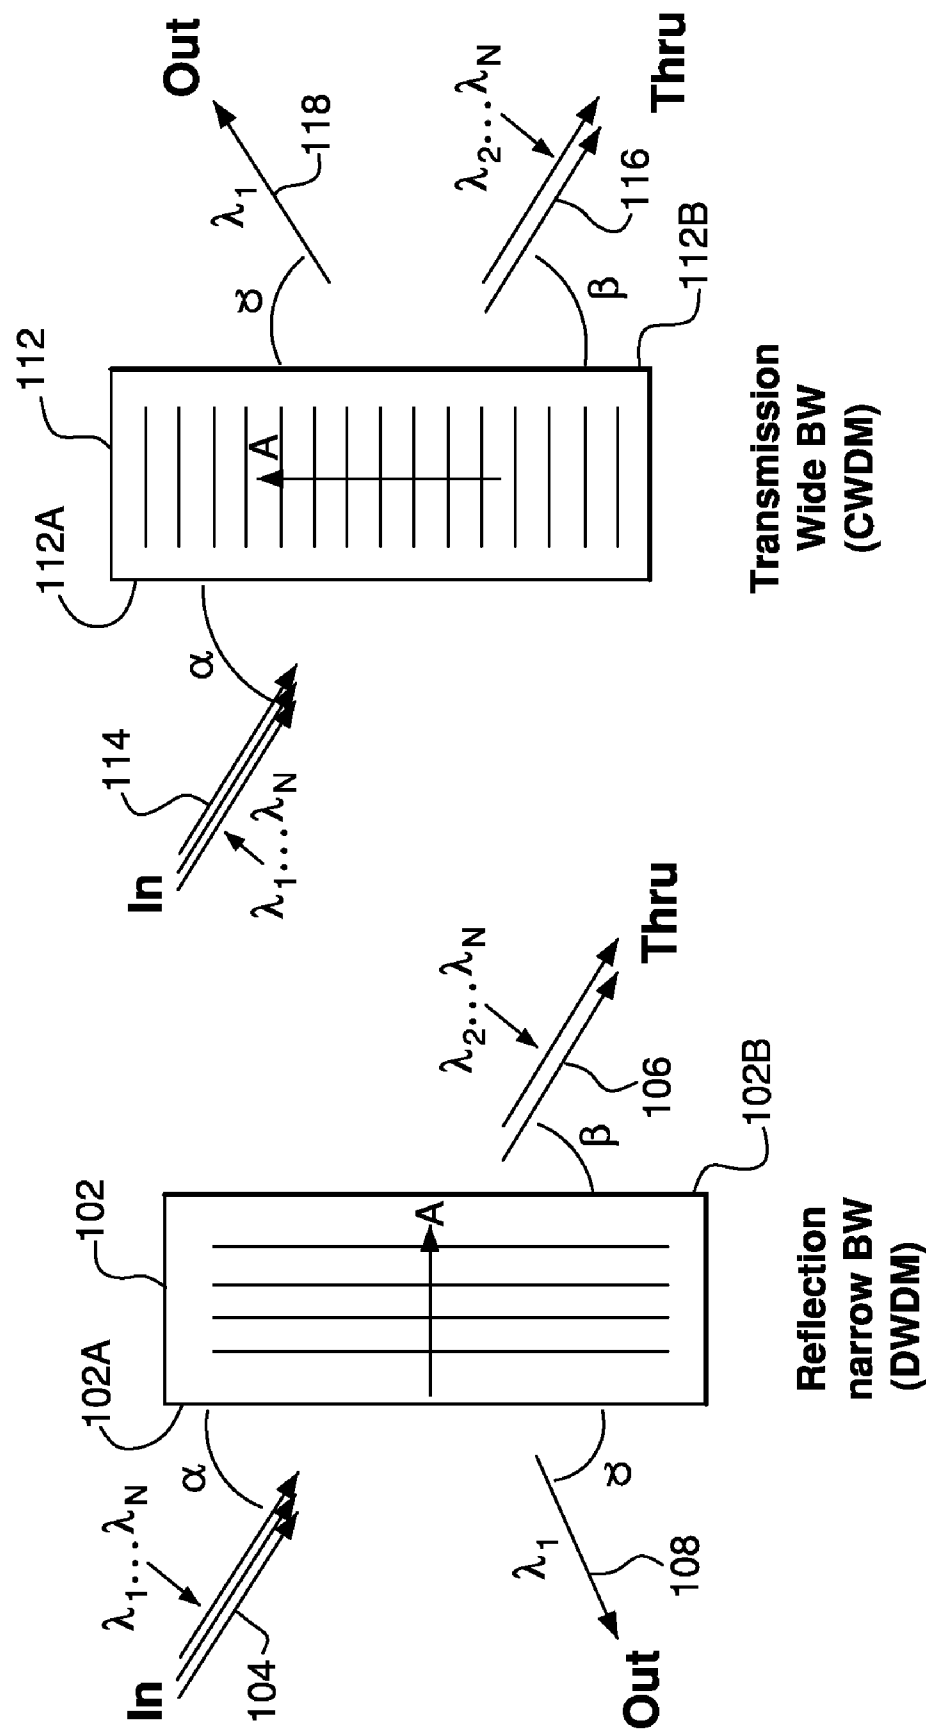


FIG. 1A

FIG. 1B

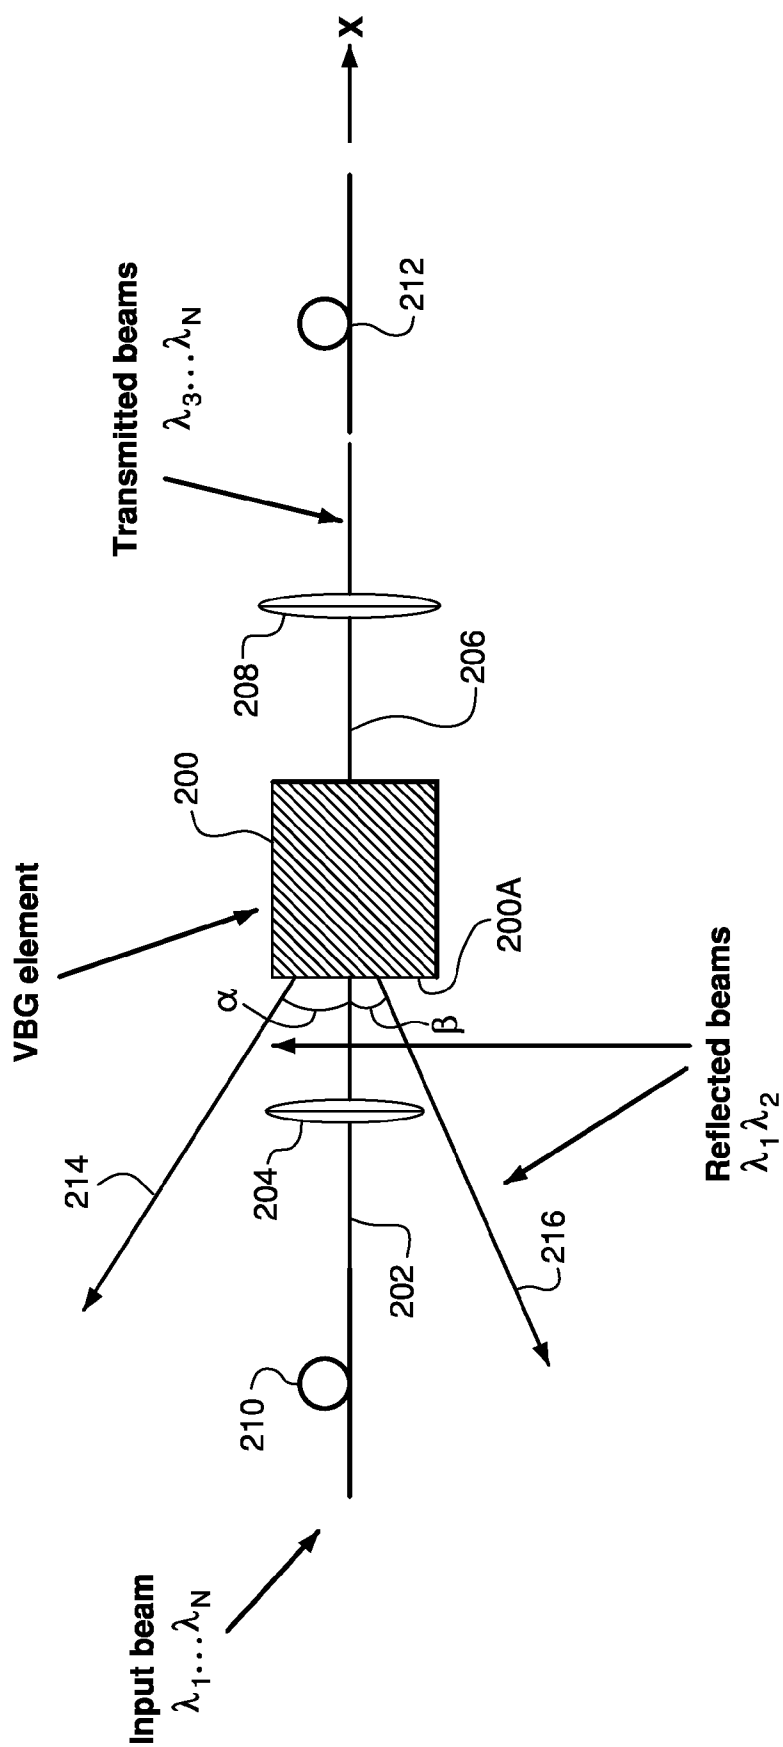


FIG. 2

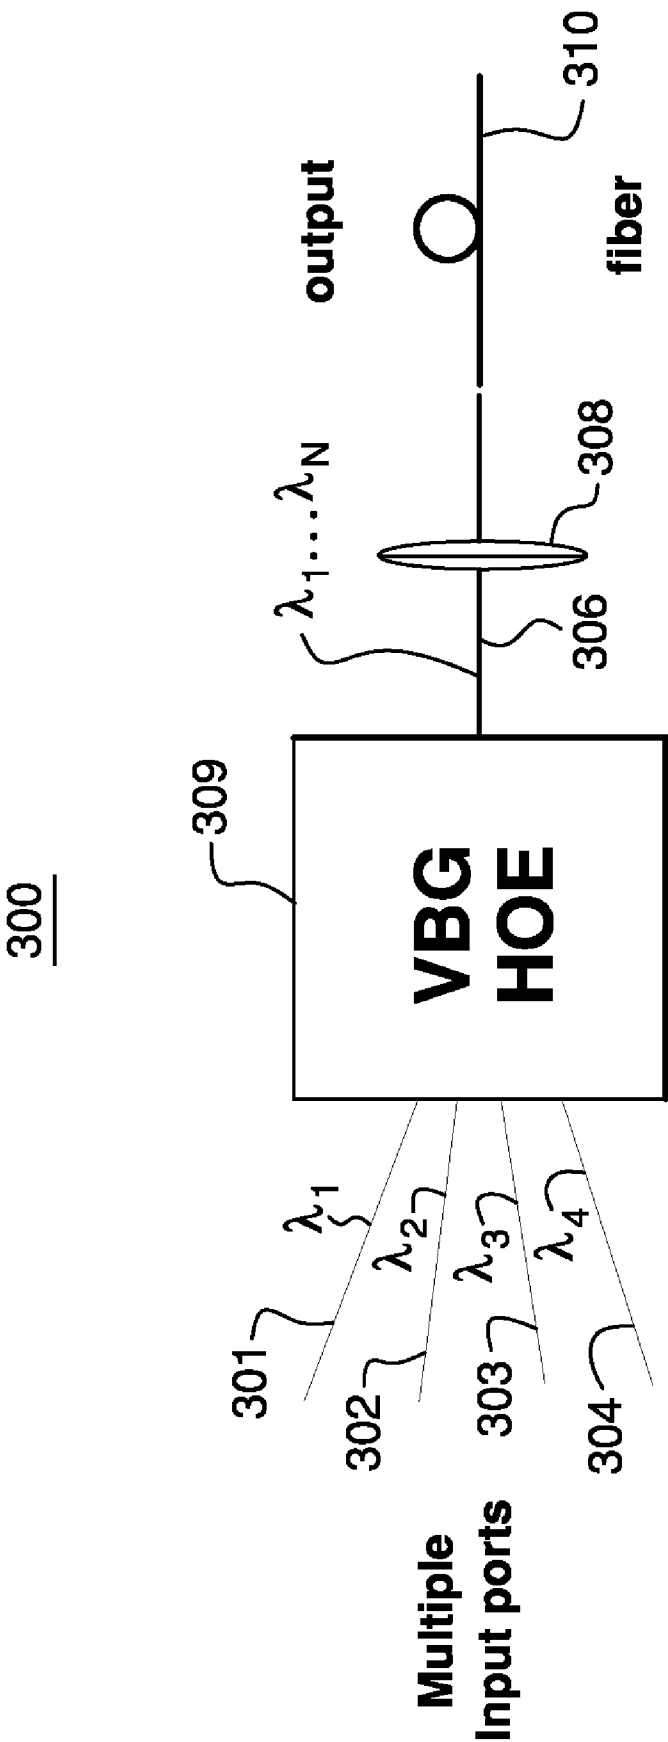


FIG. 3

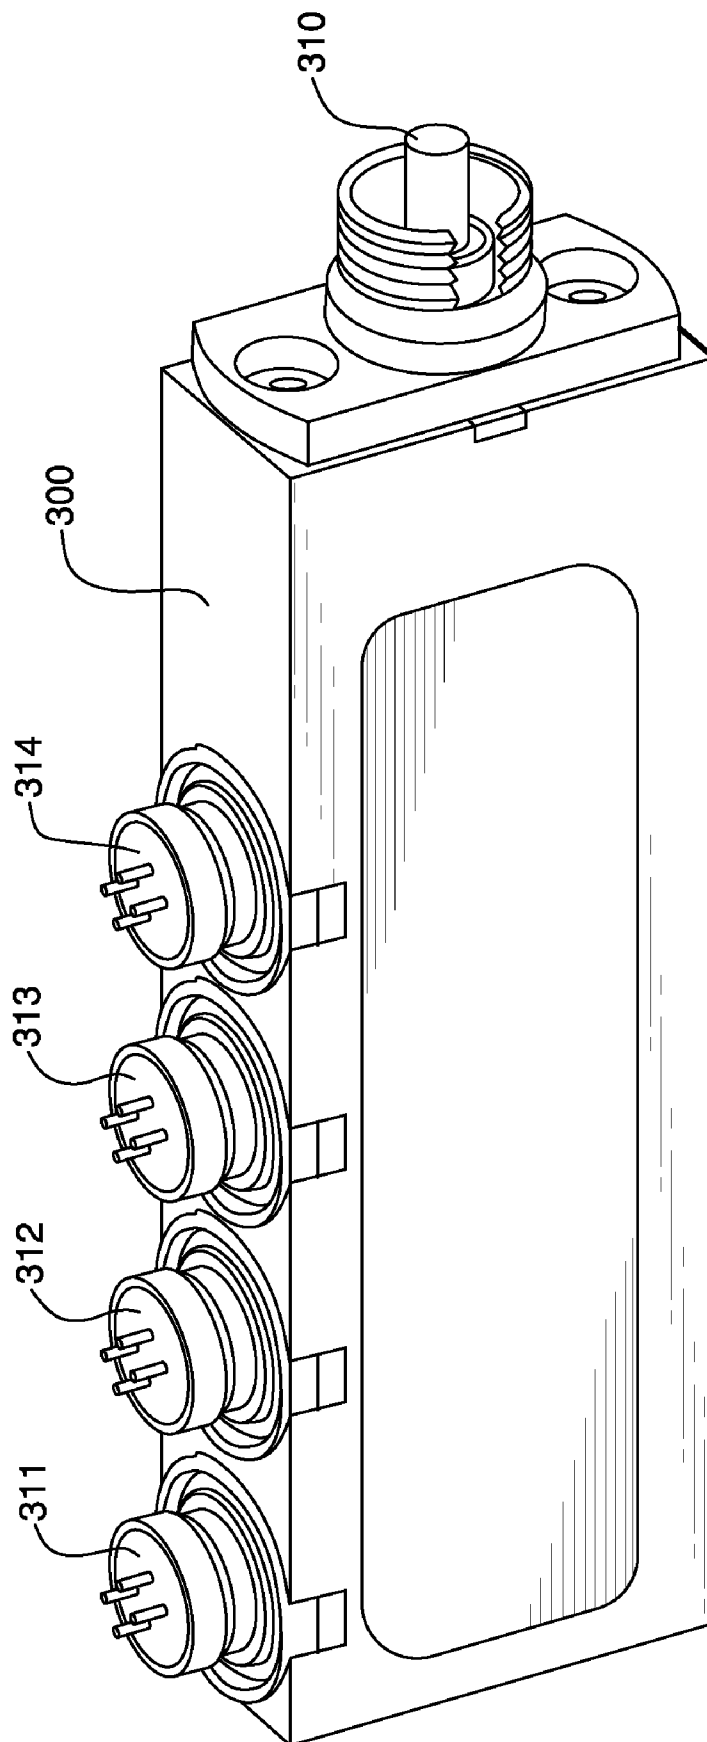


FIG. 4

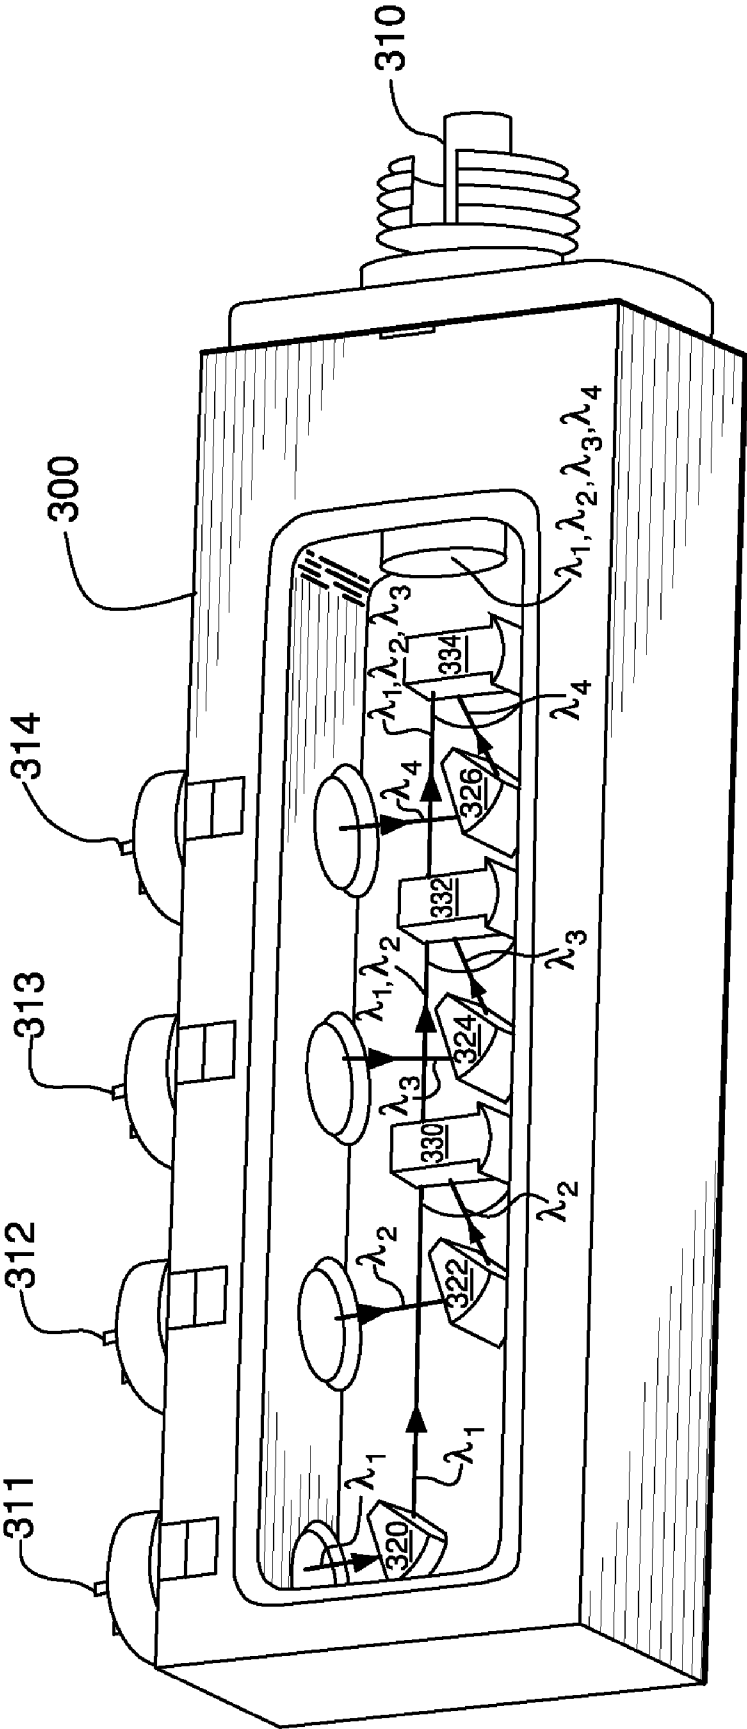


FIG. 5

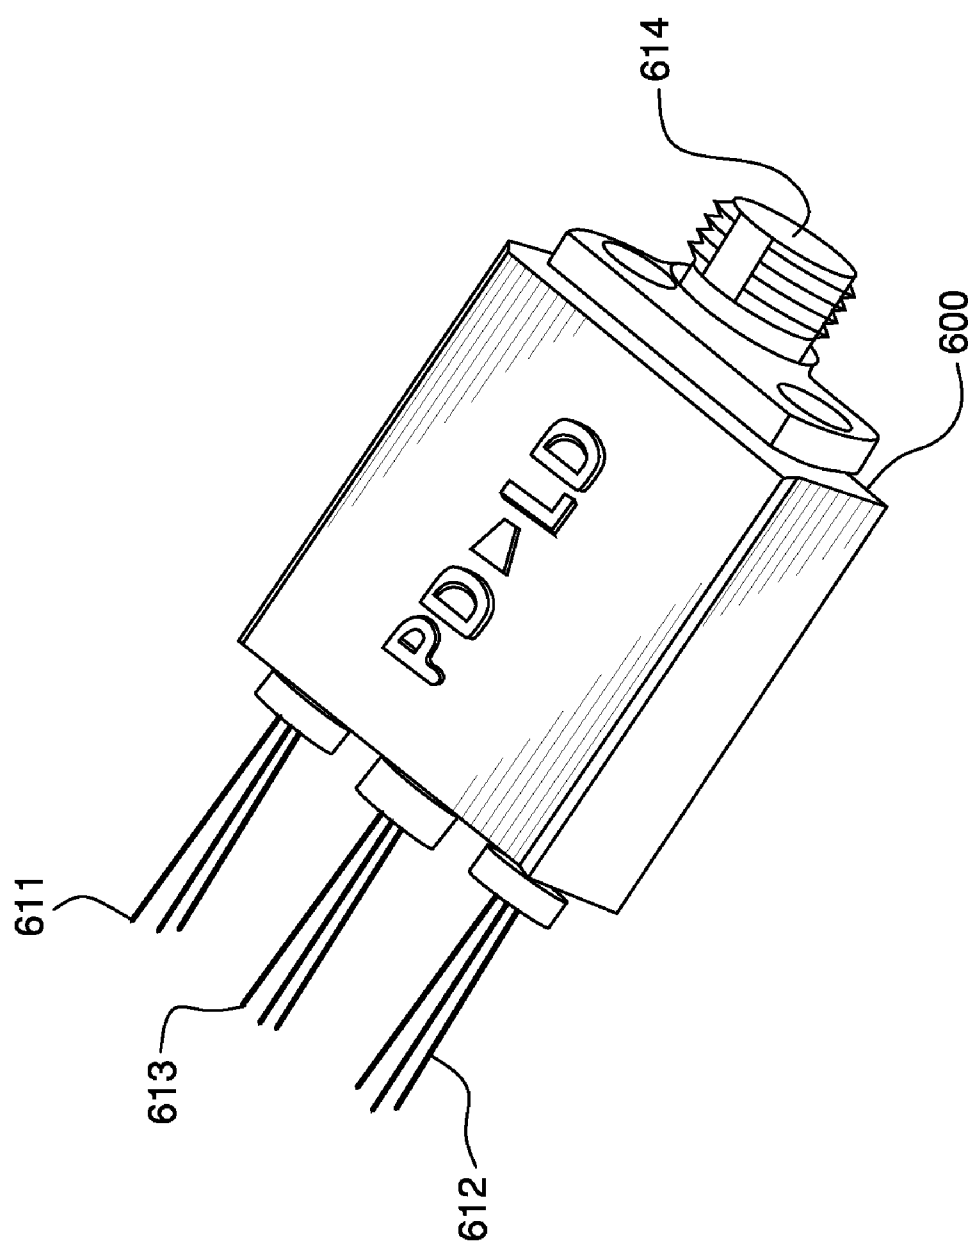


FIG. 6

600

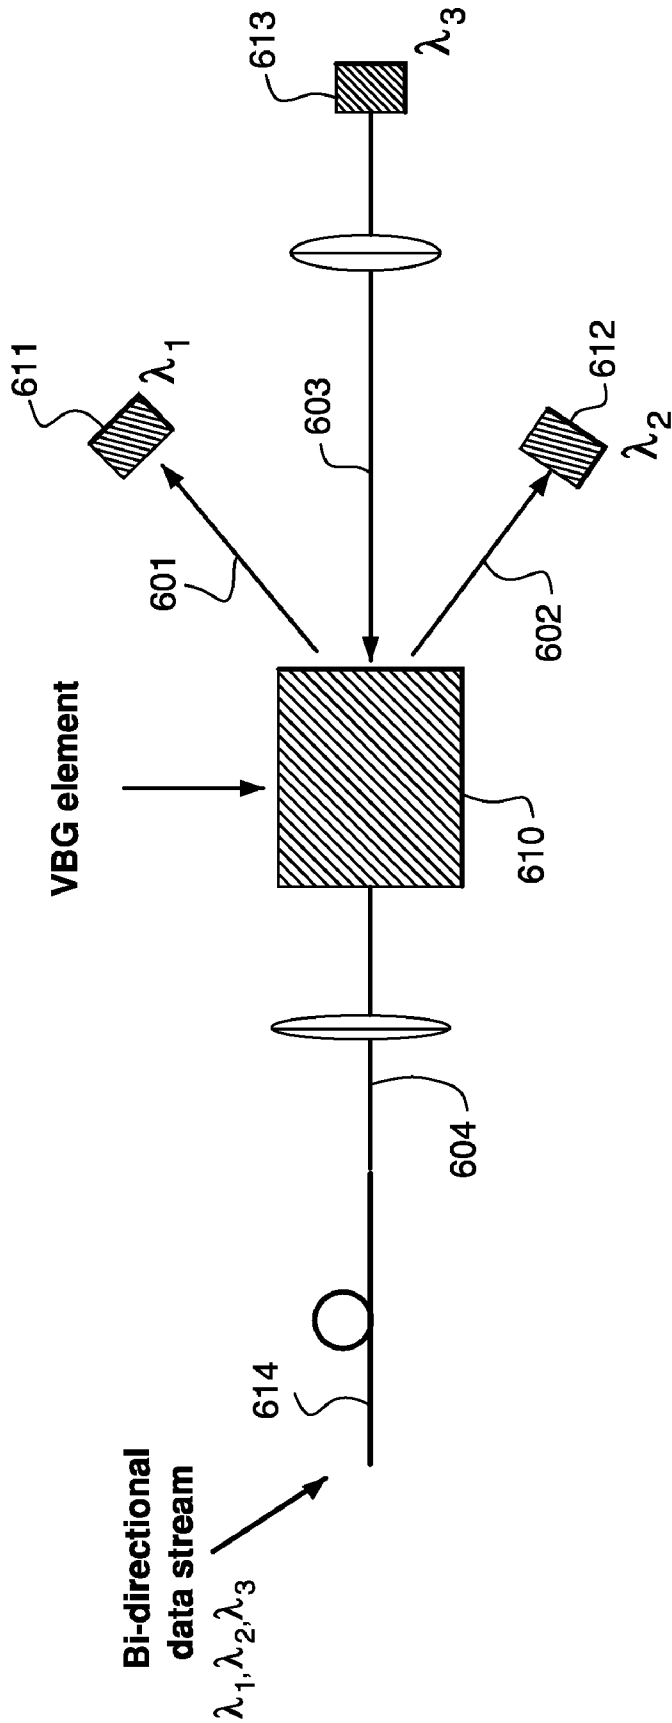


FIG. 7

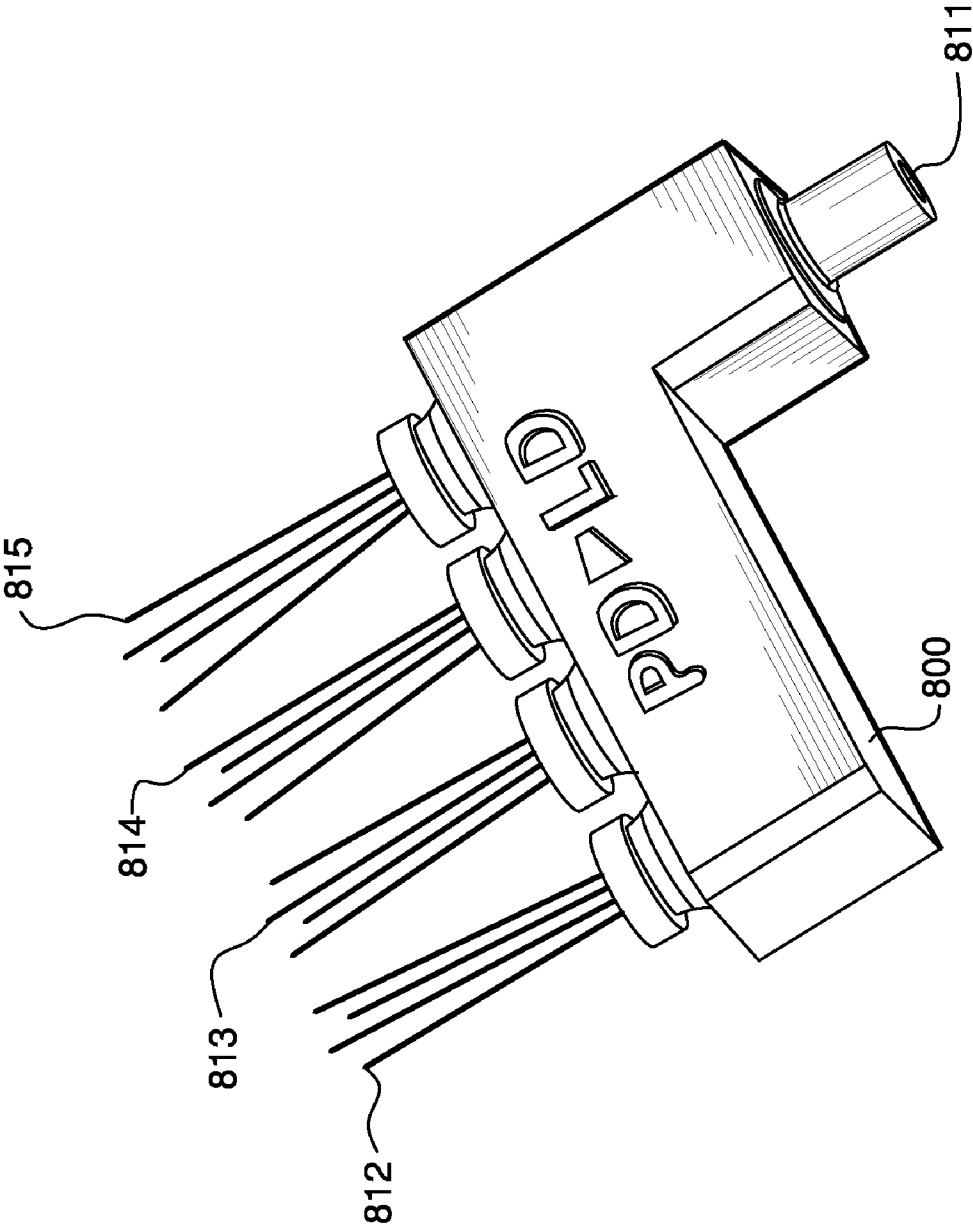


FIG. 8

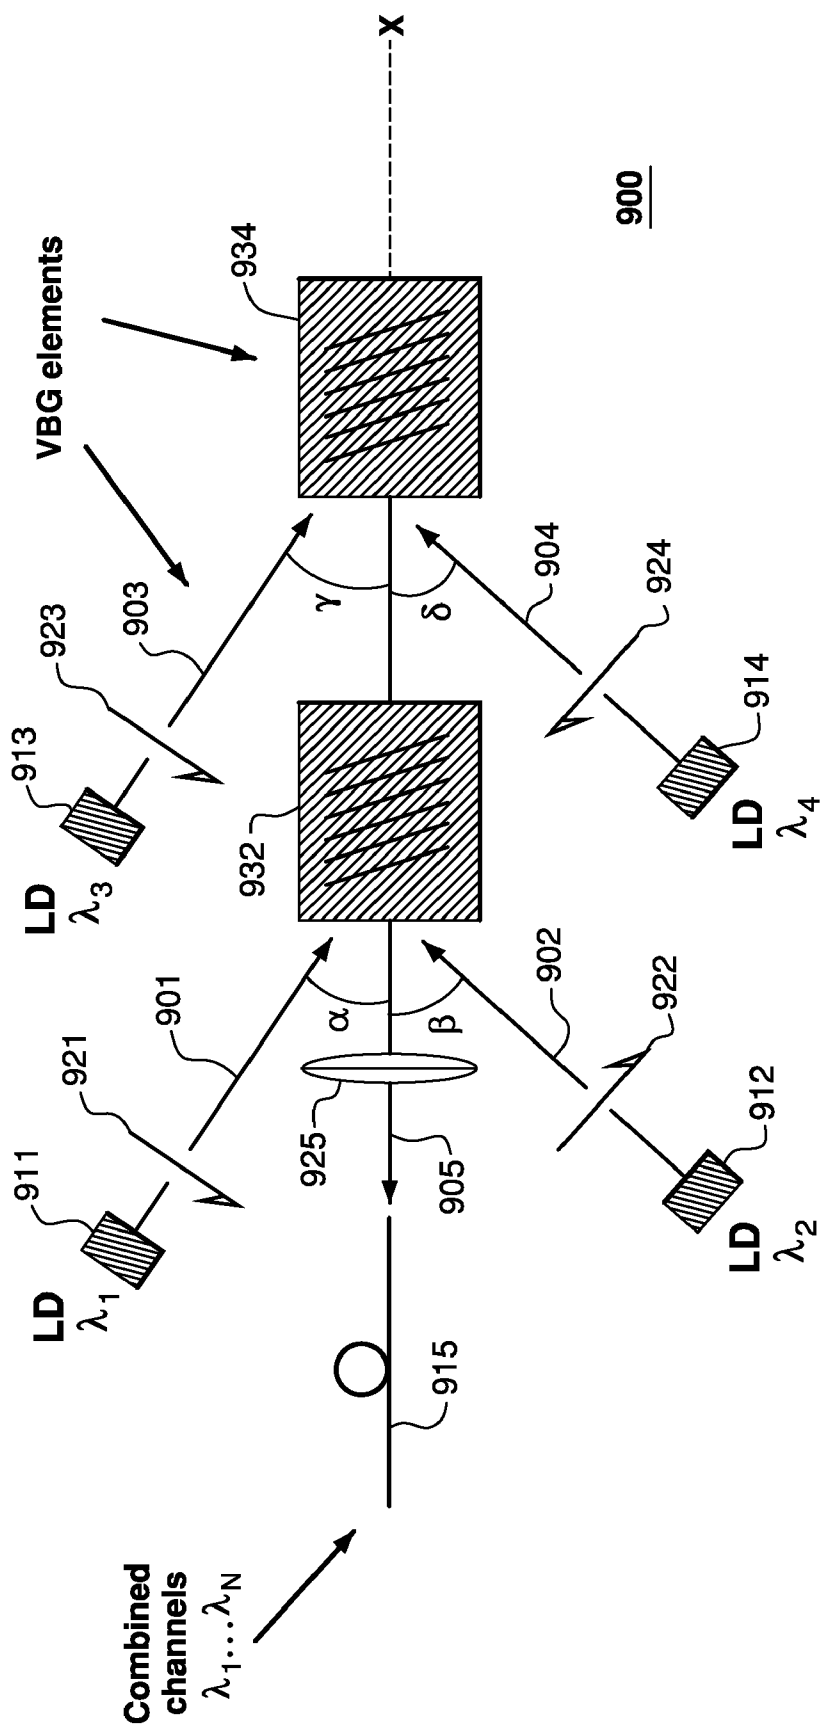


FIG. 9

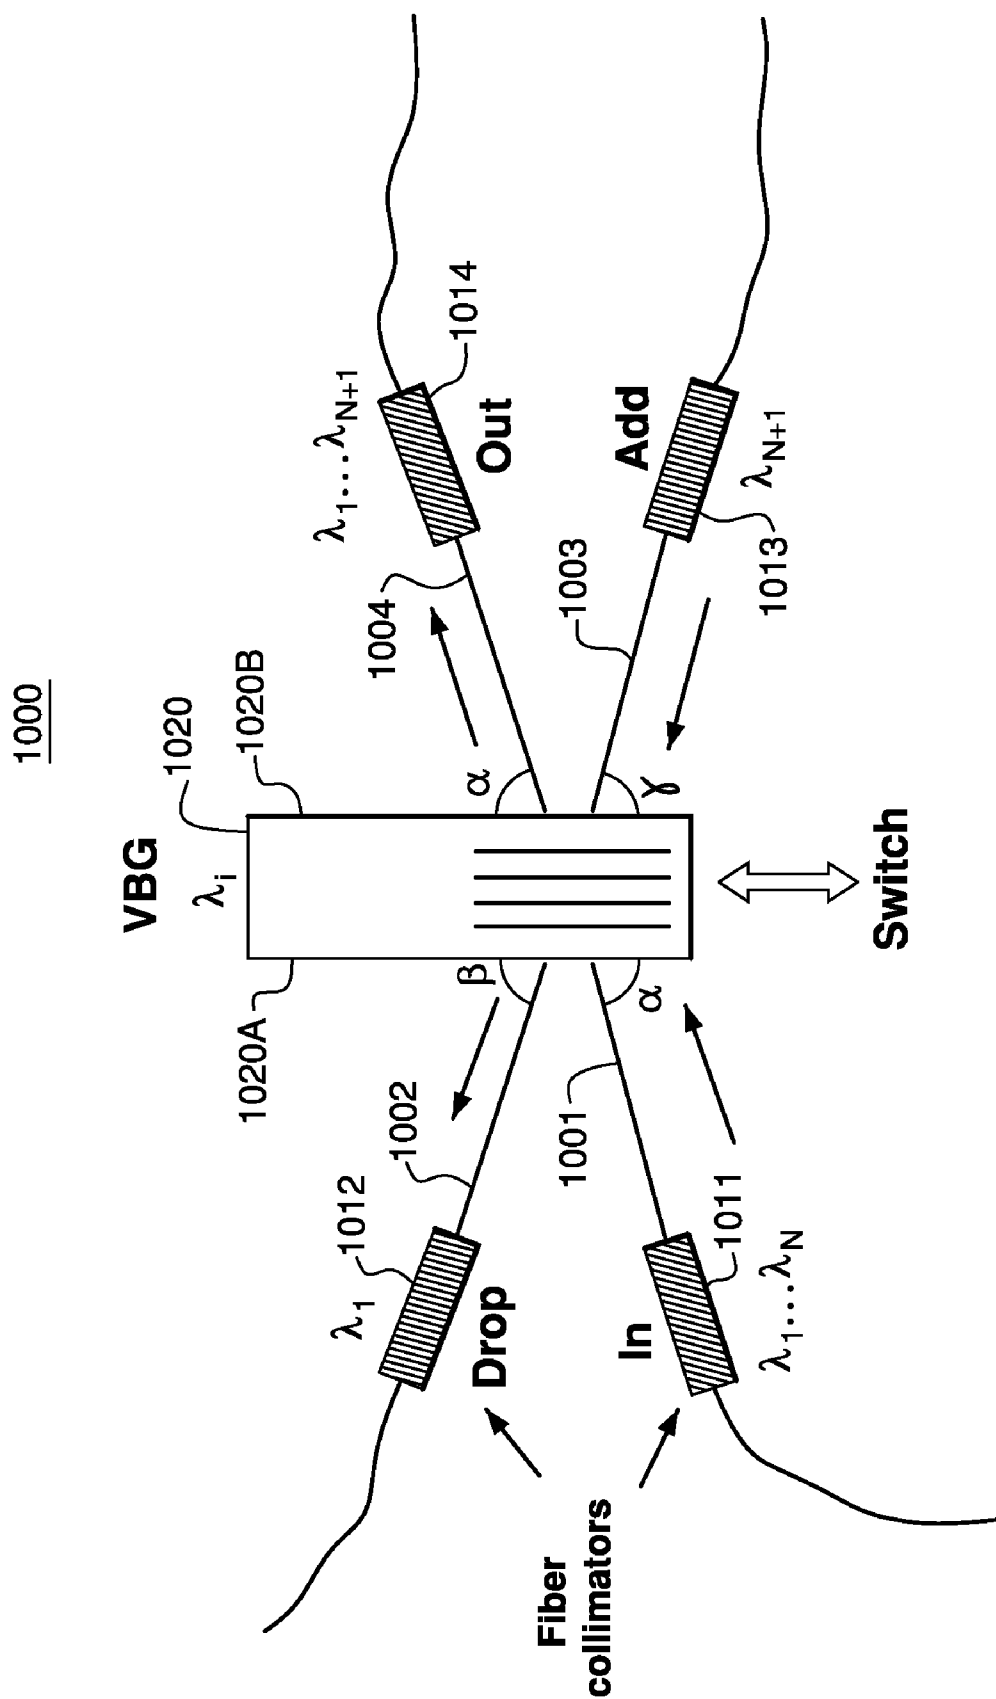


FIG. 10

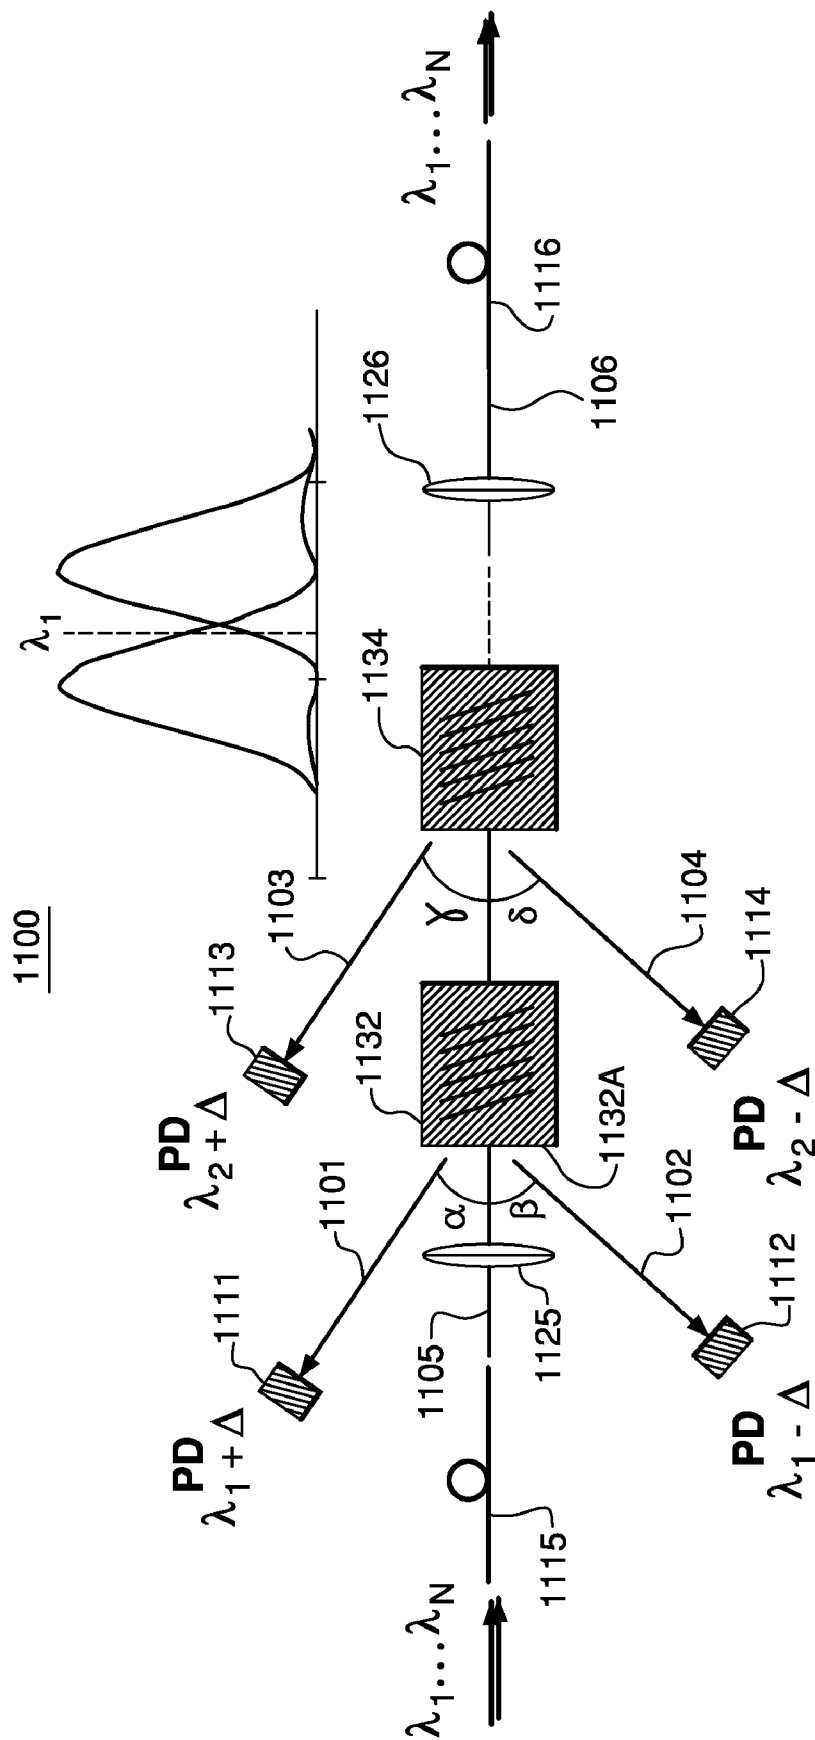
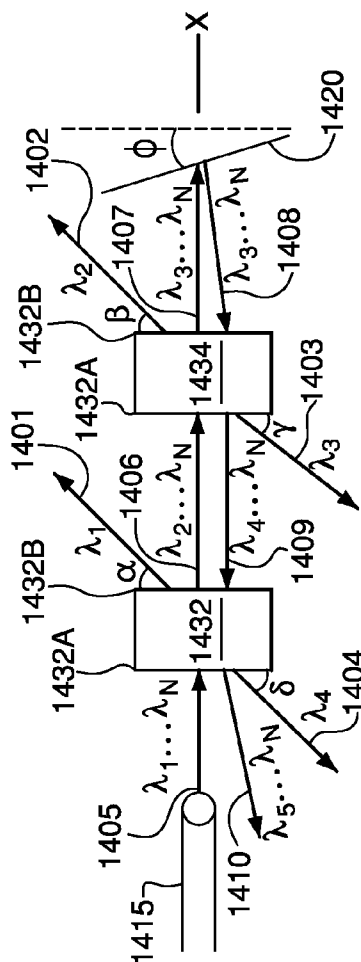
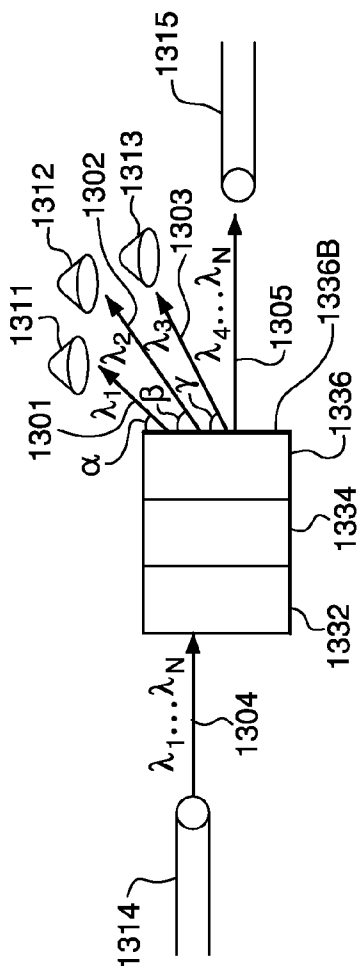
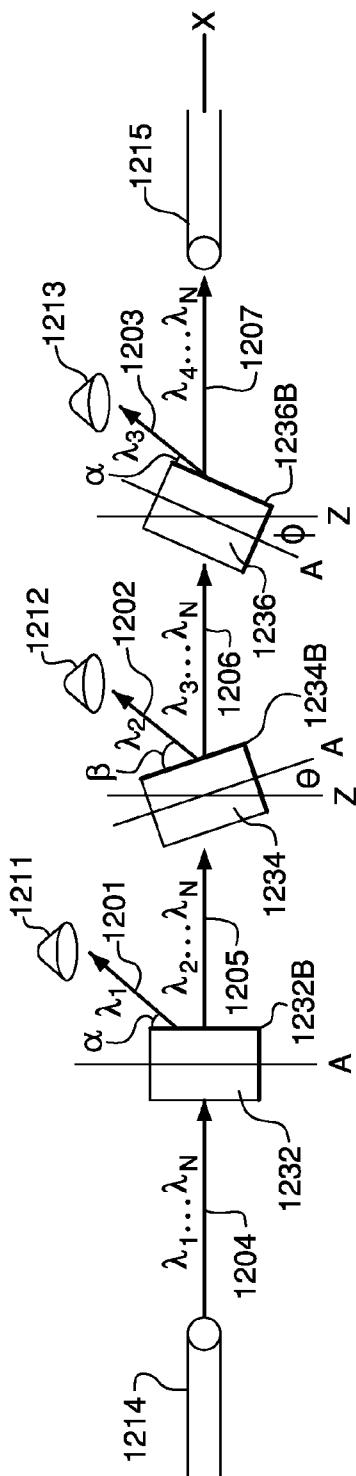


FIG. 11



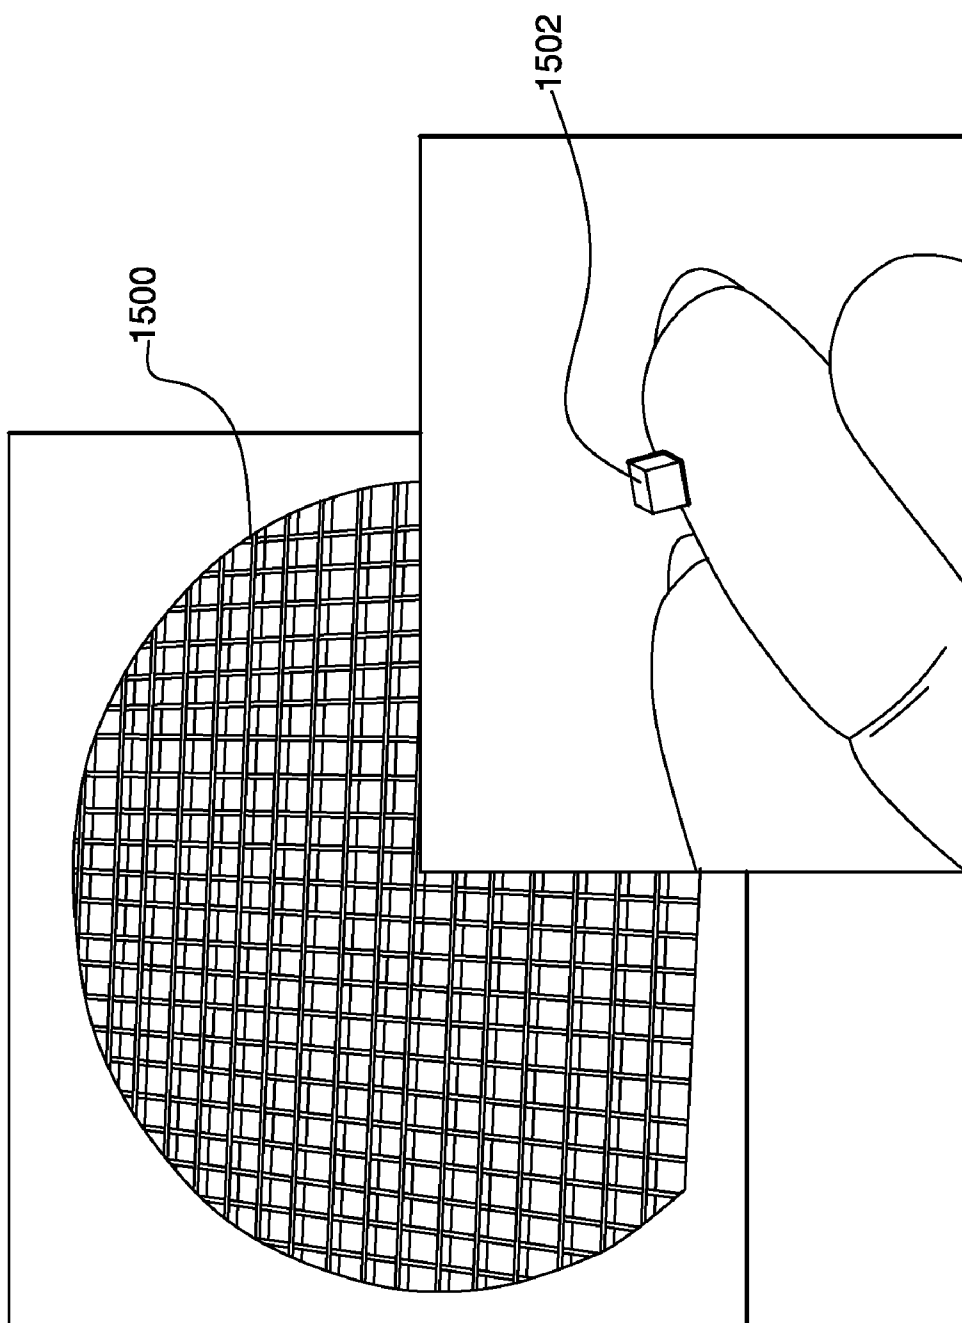


FIG. 15

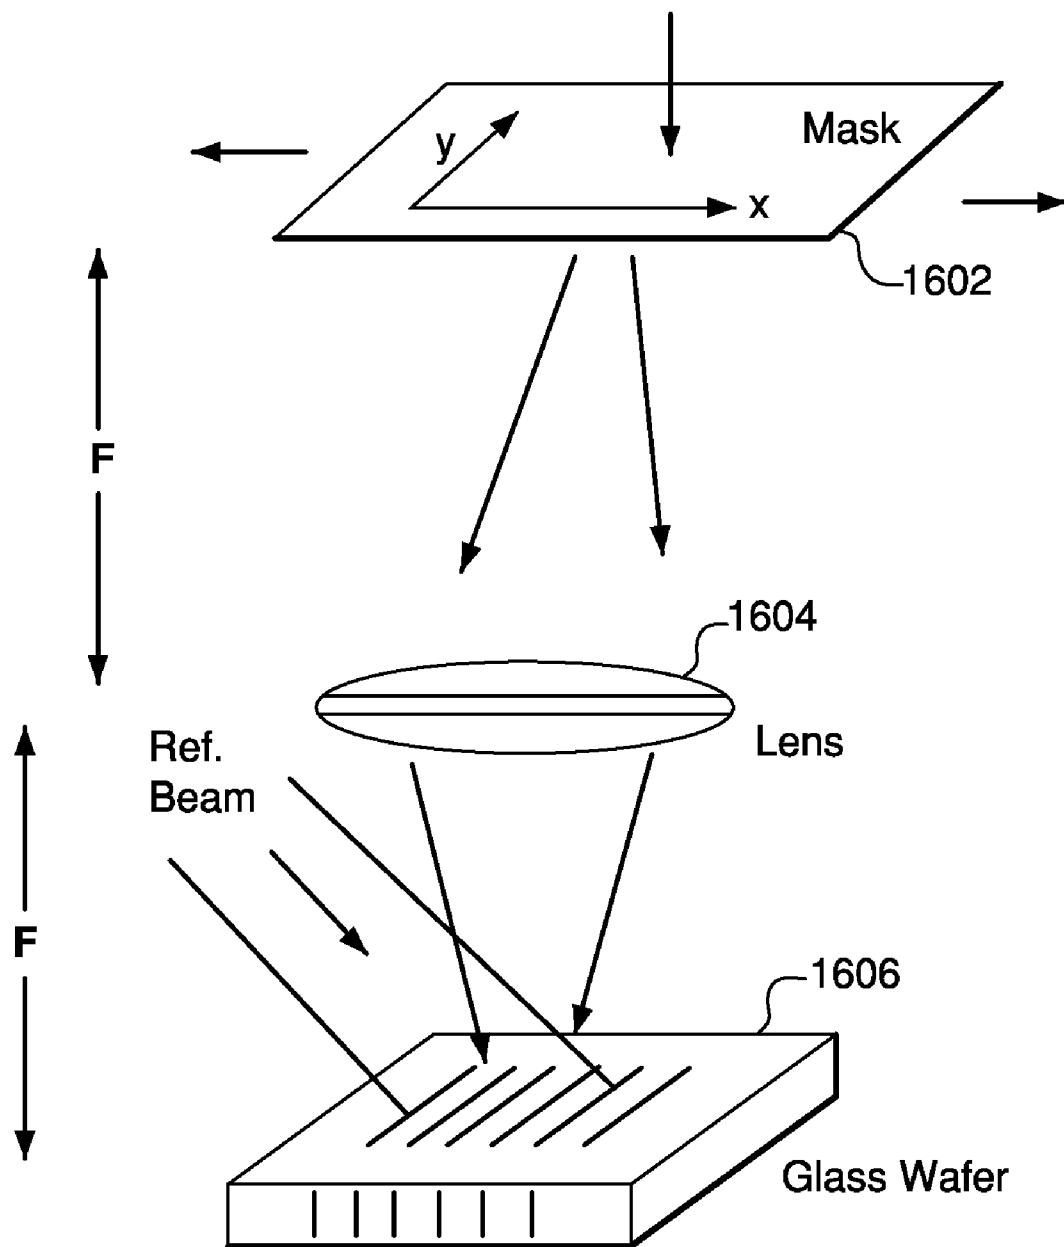


FIG. 16A

FIG. 16B

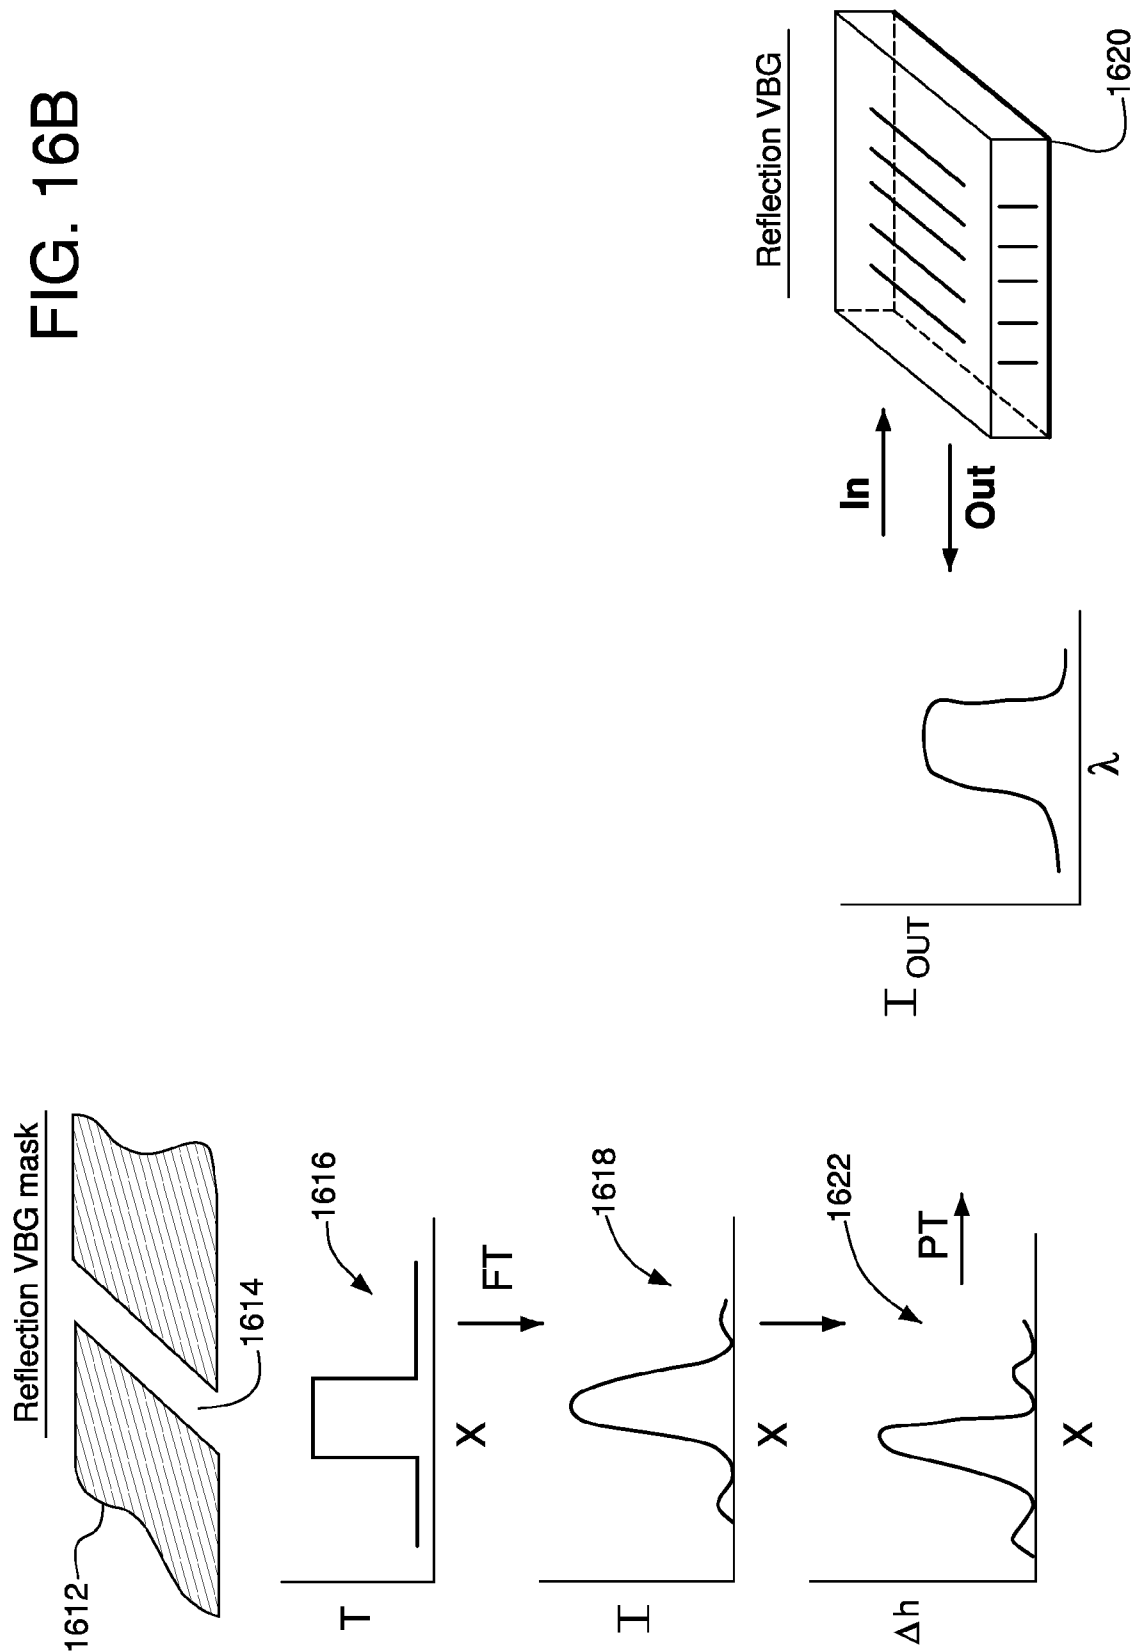
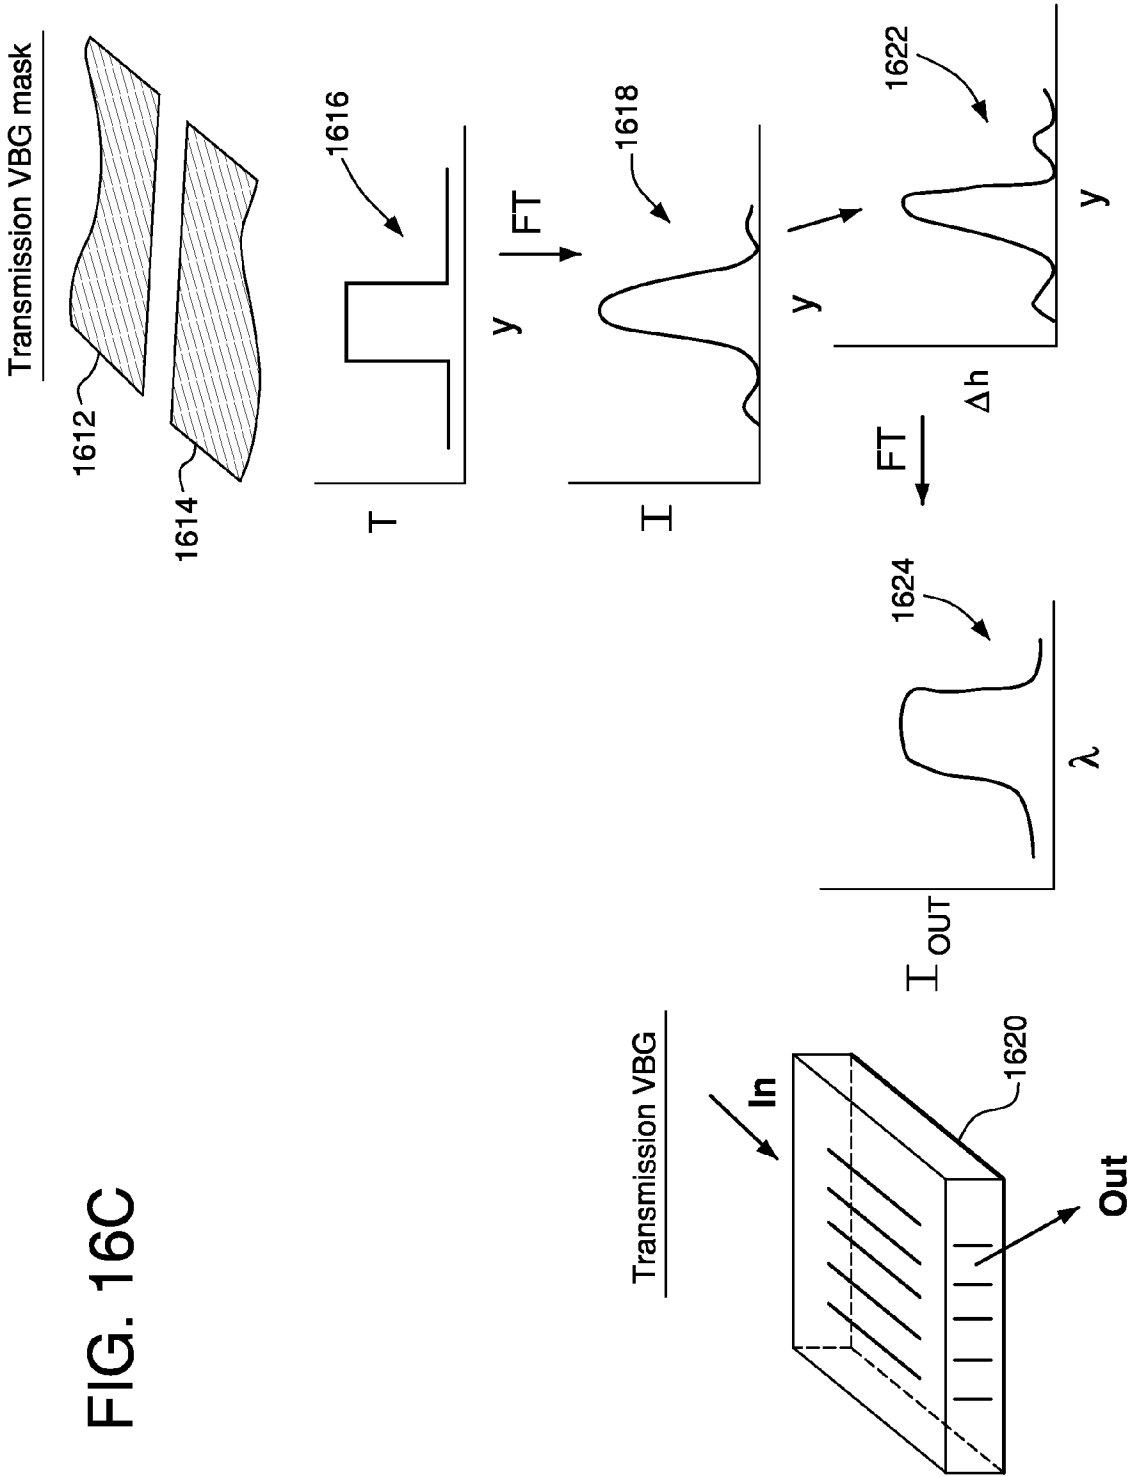


FIG. 16C



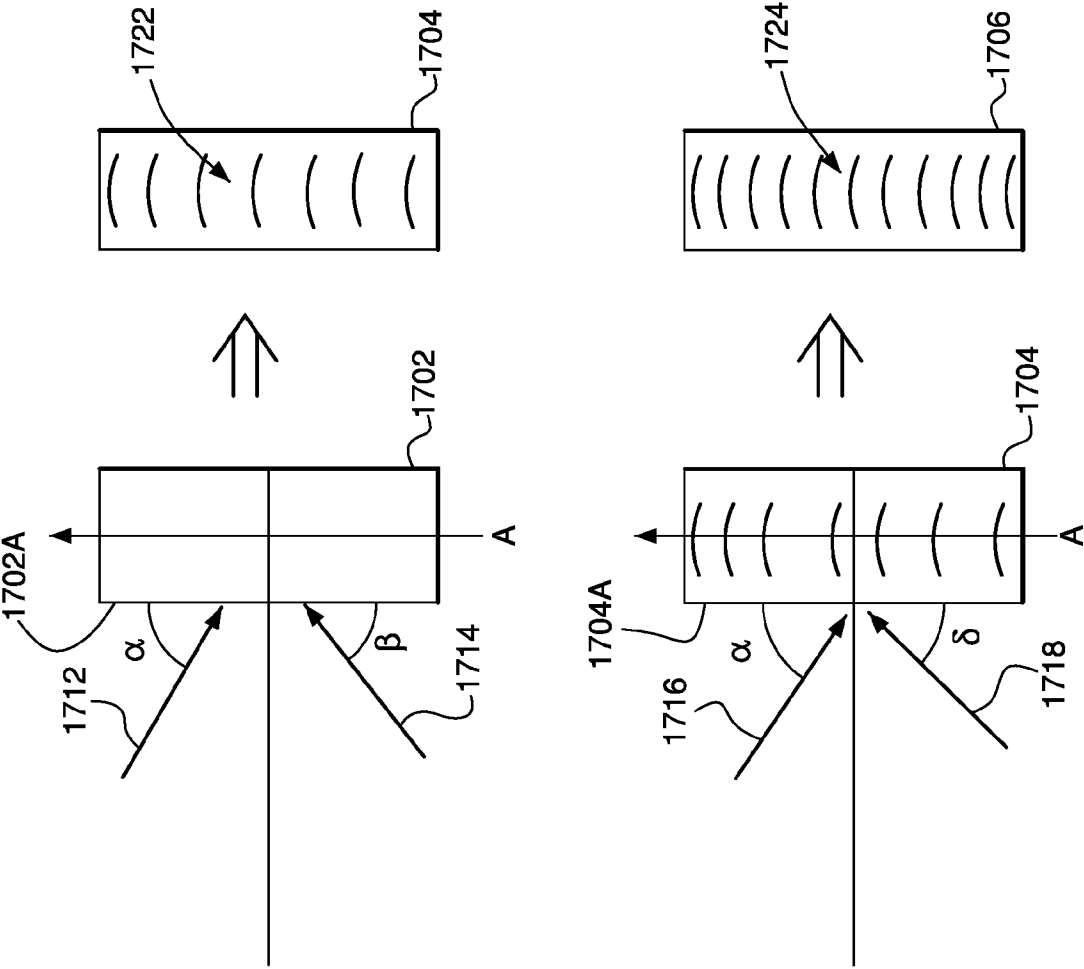


FIG. 17

VBG chip: DEMUX

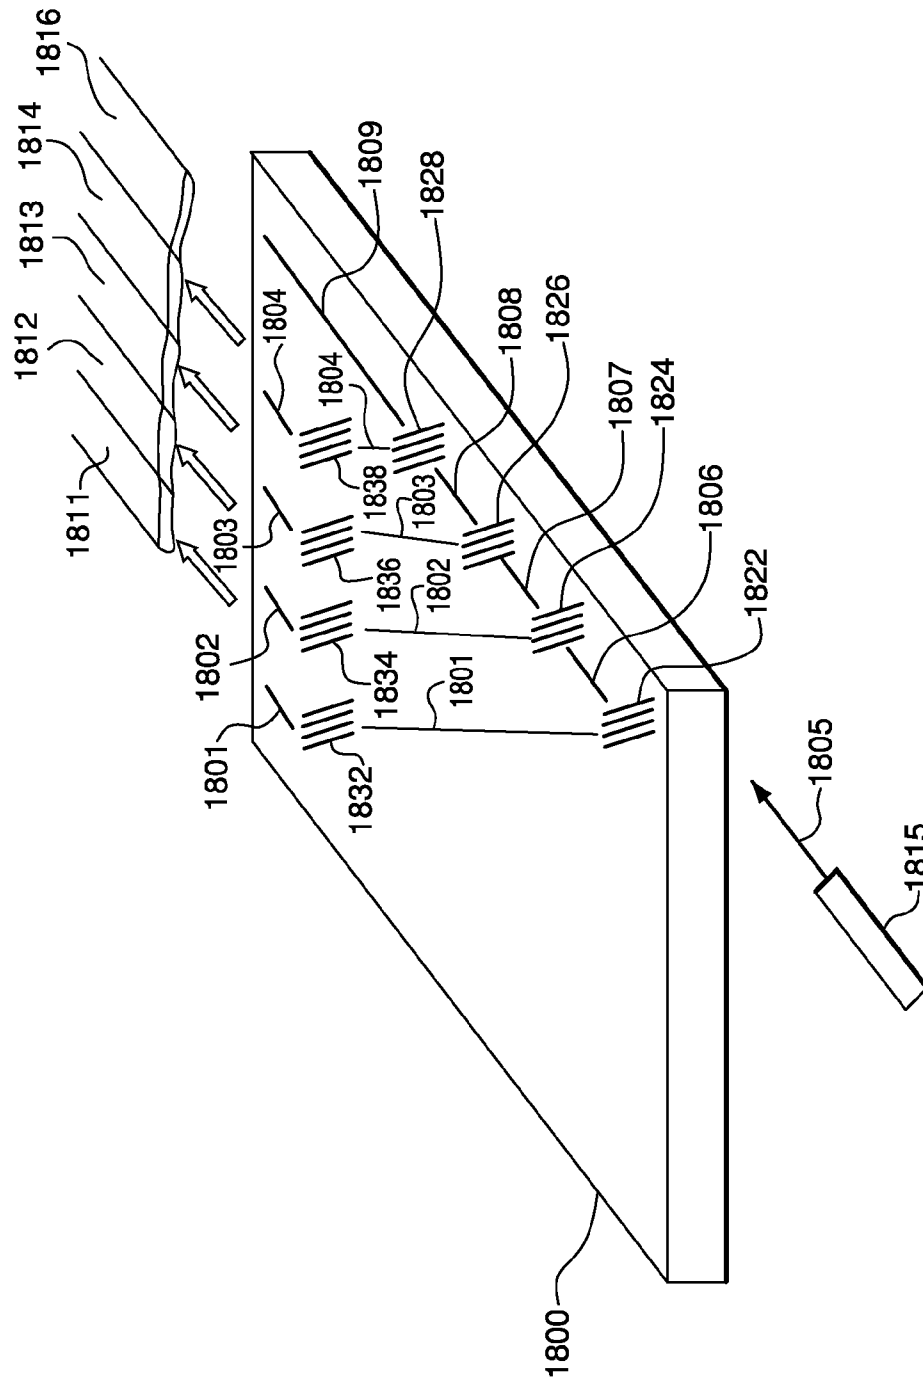


FIG. 18

BRAGG GRATING ELEMENTS FOR OPTICAL DEVICES

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a division of U.S. patent application Ser. No. 11/407,742, filed Apr. 19, 2006, which is a division of U.S. patent application Ser. No. 10/390,521, filed Mar. 17, 2003, now U.S. Pat. No. 7,125,632, which claims benefit under 35 U.S.C. §119(e) of provisional U.S. patent application No. 60/365,032, filed Mar. 15, 2002.

BACKGROUND

Light wavelength selectivity of thick periodic structures was, historically, studied first in x-ray diffraction on crystalline solids. It was recognized that such selectivity arises due to the coherent addition of the light energy diffracted by individual layers forming precisely spaced stacks, such as that of the atomic layers of a crystalline lattice. The name of phenomenon, "Bragg diffraction," was given in recognition of the studies of it performed by Bragg.

Later, largely the same behavior was observed during the diffraction of light at optical wavelengths on the acoustic waves of the appropriate frequencies created inside optically transparent solid media. Acoustic waves create a periodic modulation of the index of refraction of a dielectric material via perturbation of its density. As a result, an acoustic wave can be used to manipulate light based on its wavelength. Thus, it functions as a wavelength filter.

Acoustic perturbation, however, is of a temporal nature, and relaxes completely after its source is extinguished and with it disappears the filter. Long-lasting Bragg gratings were first utilized, perhaps, with the invention of full-color holography. It employed relatively thick films of dichromatic gelatins (DCG) for holographic recording of color-realistic images of 3-D objects by using lasers of different colors. Subsequent reconstruction of images with conventional white light sources became possible due to the wavelength selectivity property of volume Bragg gratings. However, to the inventors' knowledge, even though the wavelength selectivity of the volume Bragg gratings was the underlying mechanism that enabled white-light reconstruction of thick-layer DCG display holograms, their utility for separating, combining, or otherwise manipulating specific wavelengths of light with the intention of achieving practical device functionality has not been recognized.

Use of volume Bragg gratings (VBG) recorded in doped lithium niobate photorefractive crystals for filtering light at optical wavelengths was adopted in construction of solar and lidar filters used to isolate light at a particular wavelength from the broad band background. A principal issue, however, is that recording of such filters must be performed at the same wavelength at which the filter will subsequently operate. As a result, the use of these filters is limited to a very limited range of wavelengths where sufficiently powerful lasers exist. Furthermore, the list of appropriate recording materials is confined to two or three narrow classes of photorefractive materials, which often have physical properties that are unsuitable for their intended mode of operation. For example, no material is known to the inventors that would allow construction of practical functional fiber-optic devices that would utilize volume Bragg grating filters recorded at wavelengths in the range of about 800-1650 nm.

This drawback can be partially overcome in photorefractive lithium niobate crystals when a VBG filter is recorded

through a different surface than that used for its operation. By using this approach, filters can be constructed in lithium niobate that can operate at wavelengths that are useful for practical photonic devices, such as, for example, fiber-optic devices. Nonetheless, this approach is still rather limited due to a number of factors. First, the usable wavelength range is limited to $\lambda_{op} > n \cdot \lambda_{rec}$ on the one side, and the near infrared absorption edge of the lithium niobate on the other. Also, for practical devices, the bandwidth of the filter $\Delta\lambda$ is limited by the maximum refractive index modulation achievable in that material (or its dynamic range, Δn): $\Delta\lambda < (\lambda_{op}) \cdot \Delta n / 2n$. This factor substantially limits the usefulness of this type of filter. This approach also requires the use of at least two (and typically four) polished surfaces that are orthogonal to each other, which increases the complexity of the filter manufacturing process and its cost. Additionally, the wavelength of the filter is substantially fixed to the value determined by the angle between the recording beams in the holographic setup. As a result, the wavelength must be controlled precisely for any practical device and is, therefore, unique for a particular wavelength or information-carrying "channel" of light, which complicates the issues in manufacturing of these elements.

SUMMARY

A method for manufacturing a three-dimensional holographic element may include placing a virgin recording wafer directly behind a recorded master hologram, and directing a reference beam onto the master hologram such that a replica of the master hologram is recorded on the virgin wafer. The reference beam may cause a transmitted reference wave and a reconstructed object wave to be formed. The transmitted reference wave and the reconstructed object wave may interfere behind the master hologram to cause the replica of the master hologram to be recorded on the virgin wafer. The reference beam may be directed onto the master hologram in the same fashion as during recording of the master. The replica of the master hologram may be recorded through a first side of the holographic element, and read from a second side of the holographic element that is different from the first side.

The virgin recording wafer may be a three-dimensional bulk of sensitized silica glass. The master hologram may be a three-dimensional Bragg grating, which may be recorded holographically in a bulk of photorefractive material. The master hologram may be formed by a surface profile on a transparent substrate, which may include a glass, a polymer, or a crystal, for example. The master hologram may be formed in a bulk of photosensitive glass, photorefractive crystal, dichromated gelatin, or polymer, for example.

A method for manufacturing a three-dimensional Bragg grating element may include forming a first Bragg grating element using a pair of recording beams, the first Bragg grating element having a three-dimensional Bragg grating recorded therein, and using a single recording beam to replicate the first Bragg grating element to form a second Bragg grating element having recorded therein a replica of the Bragg grating recorded in the first Bragg grating element. A virgin recording medium may be placed directly behind the first Bragg grating element, and the single recording beam may be used to replicate the first Bragg grating to form the second Bragg grating in the virgin recording medium, thereby forming the second Bragg grating element. The single recording beam may interfere with a reconstructed object wave behind the first Bragg grating to form the replica in the virgin recording medium.

Forming the first Bragg grating element may include directing at least one of the pair of recording beams onto a first recording medium. During replication, the single recording beam may be directed onto the first Bragg grating element in the same fashion as the at least one of the pair of recording beams was directed onto the first Bragg grating element during the formation of the first Bragg grating element.

BRIEF DESCRIPTION OF THE DRAWINGS

Certain preferred embodiments of the invention will now be described in detail with reference to the figures. Those skilled in the art will appreciate that the description given herein with respect to the figures is for exemplary purposes only and is not intended in any way to limit the scope of the invention.

FIGS. 1A and 1B depict reflective and transmissive VBGs, respectively.

FIG. 2 demonstrates the transparency property of a VBG.

FIG. 3 is a schematic of a device according to the invention for combining a plurality of optical inputs into a single optical fiber output.

FIG. 4 is a perspective view of a preferred embodiment of a device according to the invention.

FIG. 5 depicts the interior of a device such as shown in FIG. 4.

FIG. 6 is a perspective view of another preferred embodiment of a device according to the invention.

FIG. 7 is a schematic diagram of a device such as shown in FIG. 6.

FIG. 8 is a perspective view of another preferred embodiment of a device according to the invention.

FIG. 9 is a schematic diagram of a DWDM multi-source combiner according to the invention.

FIG. 10 is a schematic diagram of an optical add-drop multiplexer according to the invention.

FIG. 11 is a schematic diagram of a multi-channel wavelength monitor according to the invention.

FIG. 12 depicts chain cascading of a plurality of VBGs in a fiber optic device according to the invention.

FIG. 13 depicts lamination cascading of a plurality of VBGs in a fiber optic device according to the invention.

FIG. 14 depicts a multiple path device according to the invention.

FIG. 15 depicts a method according to the invention for fabricating VBGs.

FIGS. 16A-C depict another method according to the invention for fabricating VBGs.

FIG. 17 depicts yet another method according to the invention for fabricating VBGs.

FIG. 18 depicts an integrated VBG "chip" according to the invention.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

Using Sensitized Silica Glasses for Manufacturing of VBG Filters

One of the major problems in developing and using any kind of permanent VBG filters for practical applications has been the unavailability of a material or a class of materials possessing physical properties that are adequate for the practical applications. For example, the photorefractive electro-optic crystals, in which much of the research was conducted on the subject of VBGs, among other problems, are incapable of providing truly permanent, stable recording across a wide

temperature range. Furthermore, these crystals are strongly anisotropic, which limits their usage substantially. For these reasons, an entire range of applications of VBG filters in general has not been substantially explored. In fact, to the inventors' knowledge, there is not a single photonic device now in the market that uses VBG elements.

According to the invention, a previously unexplored class of materials, the silicate photorefractive glasses (PRG), can be used to enable the design and manufacturing of practical devices based on VBGs, with special emphasis on photonic devices for fiber-optic applications. This type of materials substantially overcomes all of the above-mentioned drawbacks of the previously studied materials and possesses all the required properties to manufacture devices for demanding applications exemplified by the fiber optics. These properties include, but are not limited to, the following: a) optical transparency in the entire optical window from UV to mid-infrared; b) outstanding longevity of the recorded gratings; c) outstanding thermal stability ($>200^\circ\text{C}$); d) adequate dynamic range; e) excellent optical quality, including the achievable polishing quality of the elements made of this material; f) low manufacturing costs; g) ability to be formed and processed in the adequate shapes and sizes (e.g., flat disks or wafers); h) refractive index isotropy. Compositions and processes for manufacturing such PRGs are described in U.S. Pat. No. 4,057,408, the disclosure of which is hereby incorporated herein by reference in its entirety.

Manufacturing of VBG Elements in Silica Glasses by Recording Holographically at a Specific Wavelength and Using them in Fiber-Optic Devices at an Arbitrary Wavelength

As described in the literature on the theory of Bragg diffraction in thick holograms (see, e.g., Kogelnik, H., "Coupled wave theory for thick hologram gratings," The Bell System Technical Journal, November 1969, 48(9), 2909-2947), there are two basic types of the VBGs—transmission and reflection, which are different in their mode of operation (see Kogelnik FIG. 4).

FIG. 1A depicts a reflective VBG 102 having a grating wave vector, A , in the horizontal direction as shown. An input light beam 104 composed of light of a plurality of wavelengths $\lambda_1, \dots, \lambda_N$ is directed toward the VBG 102 at a first angle α to the input face 102A of the VBG 102. The VBG 102 is formed such that it is transparent to all but one of the wavelengths $\lambda_1, \dots, \lambda_N$. That is, the light beam propagates through the grating relatively unaffected, except that the light having a certain wavelength, λ_1 , is filtered out of the beam. As a result, only that light 106 having wavelengths $\lambda_2, \dots, \lambda_N$ continues through the VBG 102 and exits the VBG 102 at a second angle β to the output face 102B of the VBG 102. Preferably, the VBG 102 is fabricated so that the angle β at which the beam exits the VBG 102 is as near as possible to the angle α at which it entered the VBG 102 (i.e., the beam continues along in a generally straight line). Light 108 having wavelength λ_1 , however, is reflected back at an angle γ from the input face 102A of the VBG 102 because of the holography within the VBG 102. That is, the VBG 102 is fabricated such that the index of refraction varies within the VBG 102 to allow light having wavelengths $\lambda_2, \dots, \lambda_N$ to continue through the VBG 102, and light having wavelength λ_1 to be reflected back at a known angle. Methods for fabricating such VBGs are discussed in detail below.

FIG. 1B depicts a transmissive VBG 112 having a grating wave vector, A , in the vertical direction as shown. An input light beam 114 composed of light of a plurality of wavelengths $\lambda_1, \dots, \lambda_N$ is directed toward the VBG 112 at a first angle α to the input face 112A of the VBG 112. The VBG 112

is formed such that it is transparent to all but one of the wavelengths. That is, the light beam propagates through the grating relatively unaffected, except that the light having a certain wavelength, λ_1 , is filtered out of the beam. As a result, only that light **116** having wavelengths $\lambda_2, \dots, \lambda_N$ continues through the VBG **112** and exits the VBG **112** at a second angle β to the output face **112B** of the VBG **112**. Preferably, the VBG **112** is fabricated so that the angle β at which the beam **116** exits the VBG **112** is as near as possible to the angle α at which it entered the VBG **112** (i.e., it continues along in a generally straight line). Light **118** having wavelength λ_1 , however, exits the VBG **112** at a third angle γ to the output face **112B** because of the holography within the VBG **112**. That is, the VBG **112** is fabricated such that the index of refraction varies within the VBG **112** to allow light having wavelengths $\lambda_2, \dots, \lambda_N$ to continue relatively straight through the VBG **112**, and light having wavelength λ_1 to be deflected as it passes through the VBG **112** such that it exits the VBG **112** at a known angle β to the output face.

Wavelength filtering properties of transmission and reflection VBGs are different primarily in the width of the filter that can be constructed in an element of practical size. Generally, reflection thick volume holograms have very narrow wavelength bandwidth, with the upper limit determined by the dynamic range of the material, as described above in connection with the example of lithium niobate VBG filters. Conversely, transmission thick volume holograms generally have wider bandwidth, which, historically, has precluded their use for the generation of white light color display holograms.

Nonetheless, when recorded in a sufficiently thick slab of a transparent material (e.g., >1 mm), a method can be devised to record transmission VBGs that can achieve bandwidths sufficiently narrow for practical photonic devices (e.g., bandwidth of 30 nm or less).

Another principal difference between reflection VBGs and transmission VBGs is that the transmission type allows tuning of the central wavelength of the filter by adjusting the incident angle of light upon the VBG. For that reason, a VBG filter can be recorded at one wavelength (e.g., in the UV range where silicate PRGs are sensitive) and operate at another (e.g., in the 850 nm to 1650 nm range typically employed in various fiber-optic devices). This can be achieved without the limitations of recording through an orthogonal side of the element, described above for the case of the lithium niobate VBG filters. This means that: a) the range of the usable wavelengths is practically unlimited; b) wider bandwidths are readily available; c) there is no need for polishing additional surfaces.

The use of permanent transmission VBGs as band-pass filters for manipulation of wavelengths in photonic devices, exemplified by the fiber-optic active and passive components, has not been explored so far probably for one or more of the following reasons: a) strong anisotropy of the material (e.g., inorganic electro-optic photorefractive crystals); b) impossible to manufacture in sufficiently thick layers (>1 mm, e.g., DCG); c) impossible to achieve sufficient optical quality of the bulk material and/or polishing quality of the surfaces (e.g., photo-polymers); d) insufficient temperature stability.

FIG. 2 demonstrates the transparency property of a VBG **200** in which an input light beam **202** composed of light of a plurality of wavelengths $\lambda_1, \dots, \lambda_N$ is directed toward the VBG **200**, through a lens **204**, along an optical axis, x , of the device. As shown, the input light beam **202** can be emitted from an optical fiber **210**. The VBG element **200** is fabricated such that the index of refraction varies within the VBG **200** to allow light **206** having wavelengths $\lambda_3, \dots, \lambda_N$ to continue relatively straight through the VBG **200**, through a lens **208**, and into a

receiver **212**, which can be another output optical fiber, for example, as shown. Light **214** having wavelength λ_1 , however, is reflected back at a first angle α from the input face **200A** of the VBG **200**. Similarly, light **216** having wavelength λ_2 is reflected back at a second angle β from the input face **200A** of the VBG **200** because of the holography within the VBG **200**.

FIGS. 3-5 depict a preferred embodiment of a fiber optic device **300** according to the invention for combining a plurality of optical fiber inputs **311-314** into a single optical fiber output **310**. As shown, the device **300** includes four optical inputs **311-314**, which can be optical fibers, for example. Each optical input **311-314** carries light **301-304** of a different wavelength λ_1 - λ_4 . The device **300** also includes three VBG elements **330, 332, 334**. Light **301** from the first input **311**, having wavelength λ_1 , is transmitted into the interior of the device **300**, where it is deflected via a first deflector **320** (such as a mirror, for example) such that it enters the first VBG element **330** at a known angle. As shown, the light travels along the optical axis of the device, and enters the VBG **330** at an angle of 90° to the input face of the VBG **330**. The first VBG **330** is transparent to light having wavelength λ_1 , so the light having wavelength λ_1 exits the first VBG **330** at an angle of 90° with the output face of the VBG **330**.

Light **302** from the second input **312**, having wavelength λ_2 , is transmitted into the interior of the device **300**, where it is deflected via a second deflector **322** such that it enters the first VBG element **330** at a known angle. The first VBG **330** deflects the light having wavelength λ_2 such that the light having wavelength λ_2 exits the first VBG **330** at an angle of 90° with the output face of the VBG **330** and, therefore, is combined with the light having wavelength λ_1 .

Similarly, light **303** from the third input **313**, having wavelength λ_3 , is transmitted into the interior of the device **300**, where it is deflected via a third deflector **324** such that it enters the second VBG element **332** at a known angle. The second VBG **332** deflects the light having wavelength λ_3 such that the light having wavelength λ_3 exits the second VBG **332** at an angle of 90° with the output face of the second VBG **332**. The second VBG **332** is transparent to light having wavelength λ_1 or λ_2 . Consequently, the light having wavelength λ_3 is combined with the light having wavelength λ_1 and λ_2 .

Similarly, light **304** from the fourth input **314**, having wavelength λ_4 , is transmitted into the interior of the device **300**, where it is deflected via a fourth deflector **326** such that it enters the third VBG element **334** at a known angle. The third VBG **334** deflects the light having wavelength λ_4 such that the light having wavelength λ_4 exits the third VBG **334** at an angle of 90° with the output face of the third VBG **334**. The third VBG **334** is transparent to light having wavelength λ_1 , λ_2 , or λ_3 . Consequently, the light having wavelength λ_4 is combined with the light having wavelength λ_1 , λ_2 , and λ_3 .

Thus, an output light beam **306** composed of light having wavelengths $\lambda_1, \lambda_2, \lambda_3$, and λ_4 can be formed using a plurality of VBG elements. The output light beam **306** is received by an optical receiver **310**, such as an optical fiber. It should be understood that, by reversing the direction of the light flow, a device as shown in FIG. 5 can be used to generate a plurality of output light beams, each having a known wavelength, from an input light beam composed of light having a plurality of wavelengths.

FIGS. 6 and 7 depict a preferred embodiment of a triplexer bi-directional transmitter/receiver **600** according to the invention. As shown, the device **600** includes an optical input **613**, two optical outputs **611, 612**, and a bi-directional optical carrier **614**, each of which can be an optical fiber, for example. The bi-directional carrier **614** carries light **604** having wave-

lengths $\lambda_1 \dots \lambda_3$ as shown. The first output **611** carries light **601** of wavelength λ_1 to a first receiver **621**. The second output **612** carries light **602** of wavelength λ_2 to a second receiver **622**. The optical input **613** carries light **603** of wavelength λ_3 from a source **623**.

The VBG **610** is fabricated such that it is transparent to light having wavelength λ_3 , which is transmitted to the VBG **610** via the optical input **613**. The VBG **610** can also be fabricated such that it deflects light **601** having wavelength λ_1 and light **602** having wavelength λ_2 . The light **601** having wavelength λ_1 can be received by a first optical receiver **621**, and the light having wavelength λ_2 can be received by a second optical receiver **622**. The bi-directional carrier **614** carries light **604** having wavelength λ_1 and wavelength λ_2 in a first direction (toward the VBG) and wavelength λ_3 in a second direction (away from the VBG).

FIG. **8** depicts a preferred embodiment of a Xenpak form-factor CWDM transmitter **800** according to the invention. As shown, the device **800** includes an optical input **811** and four optical outputs **812-815**, each of which can be an optical fiber, for example. The optical input carries light having wavelengths $\lambda_1 \dots \lambda_4$. The first output **811** carries light of wavelength λ_1 ; the second output **812** carries light of wavelength λ_2 ; the third output **813** carries light of wavelength λ_3 ; and the fourth output **814** carries light of wavelength λ_4 .

FIG. **9** is a schematic diagram of a DWDM multi-source combiner **900** according to the invention. As shown, the multi-source combiner **900** includes four optical inputs **911-914**, such as optical fibers, for example. Each optical input **911-914** carries light of a different wavelength $\lambda_1, \dots \lambda_4$ as shown. The device **900** also includes two VBG elements **932, 934**. Light **901** from the first input **911**, having wavelength λ_1 , is transmitted, preferably through a lens **921**, such that it enters the first VBG element **932** at a first known angle α . The first VBG **932** is fabricated such that the light **901** having wavelength λ_1 is deflected from the first VBG **932** along the optical axis x of the device **900**. Similarly, light **902** from the second input **912**, having wavelength λ_2 , is transmitted, preferably through a lens **922**, such that it enters the first VBG element **932** at a second known angle β . The first VBG **932** is fabricated such that the light **902** having wavelength λ_2 is also deflected from the first VBG **932** along the optical axis x of the device **900**.

Light **903** from the third input **913**, having wavelength λ_3 , is transmitted, preferably through a lens **923**, such that it enters the second VBG element **934** at a third known angle γ . The second VBG **934** is fabricated such that the light **903** having wavelength λ_3 is deflected from the VBG **934** along the optical axis x of the device **900**. Similarly, light **904** from the fourth input **914**, having wavelength λ_4 , is transmitted, preferably through a lens **924**, such that it enters the second VBG element **934** at a fourth known angle δ . The second VBG **924** is fabricated such that the light **904** having wavelength λ_4 is also deflected from the second VBG **924** along the optical axis x of the device **900**. The first VBG **932** is transparent to light having wavelength λ_3 and λ_4 . Thus, light beams having respective wavelengths $\lambda_1, \lambda_2, \lambda_3$, and λ_4 can be combined into a single optical beam **905**, which can then be transmitted, preferably through a lens **925**, to an optical receiver **915**, such as an optical fiber, for example.

FIG. **10** is a schematic diagram of a free-space optical add-drop multiplexer (OADM) **1000** according to the invention. As shown, the OADM **1000** includes an optical input **1011**, such as an optical fiber, for example, that carries light **1001** having wavelengths $\lambda_1, \dots \lambda_N$ as shown. As shown in FIG. **10**, the OADM **1000** includes a VBG element **1020** that is fabricated to reflect light **1002** having wavelength λ_1 . The

VBG **1020** is transparent to light having wavelengths $\lambda_2, \dots \lambda_N$. The light beam **1001** from the first input **1011** is incident onto the VBG **1020** at a first angle α to a first face **1020A** of the VBG element **1020**. Consequently, a light beam **1002** having wavelength λ_1 is deflected at a second angle β from the face **1020A** of the VBG element **1020**. The light beam **1002** having wavelength λ_1 is thus "dropped" from the input signal, and can be directed to an optical receiver **1012**, such as another optical fiber, for example.

The OADM **1000** also includes an additional input **1013**, which can be an optical fiber, for example, that carries a light beam **1003** having wavelength λ_{N+1} . The light beam **1003** having wavelength λ_{N+1} is incident onto the VBG **1020** at an angle γ to a second face **1020B** of the VBG **1020**. The VBG element **1020** is fabricated to reflect light having wavelength λ_{N+1} from the second face **1020B** such that the light **1003** from the additional input **1013** is combined with the light from the first input to form an output light beam **1004** having wavelengths $\lambda_2, \dots \lambda_{N+1}$. The output light beam **1004** can be directed to an optical receiver **1014**, such as another optical fiber, for example.

FIG. **11** is a schematic diagram of a multi-channel wavelength monitor **1100** according to the invention. As shown, the multi-channel wavelength monitor **1100** includes an optical input **1115** that carries light **1005** having wavelengths $\lambda_1, \dots \lambda_N$. The monitor **1100** also includes two VBG elements **1132, 1134**. The input light beam **1105** is transmitted, preferably through a lens **1125**, such that it enters the first VBG element **1132** at a first known angle (preferably, along the optical axis x of the device **1100**, that is, 90° to the face **1132A** of the first VBG **1132**). The first VBG **1132** is fabricated such that the light **1101** having wavelength $\lambda_1 + \Delta$ is deflected from the first VBG **1132** at a first angle α , and light **1102** having wavelength $\lambda_1 - \Delta$ is deflected from the first VBG **1132** at a second angle β . The first VBG **1132** is transparent to the rest of the wavelengths in the input beam **1105**. Light **1101** having wavelength $\lambda_1 + \Delta$ may be received by an optical receiver **1111**, and light **1102** may be received by an optical receiver **1112**.

The light beam is then transmitted to the second VBG element **1134**, which is fabricated such that the light **1103** having wavelength $\lambda_2 + \Delta$ is deflected from the second VBG **1134** at a first angle γ , and light **1104** having wavelength $\lambda_2 - \Delta$ is deflected from the second VBG **1134** at a second angle δ . Light **1103** having wavelength $\lambda_2 + \Delta$ may be received by an optical receiver **1113**, and light **1104** having wavelength $\lambda_2 - \Delta$ may be received by an optical receiver **1114**. The second VBG **1134** is transparent to the rest of the wavelengths in the beam. The output beam **1106** can then be received, preferably through a lens **1126**, by an optical receiver **1116**, which can be another optical fiber, for example.

Methods for Packaging Devices with Large Channel Counts Using VBG Filters

One of the main advantages of VBG filters and, indeed, their unique property is the ability to record multiple filters sharing the same volume of the material. This allows for the fabrication of devices of very small size and unique functionality. Nevertheless, the number of gratings that can share the same volume, known as the multiplexing number, or the $M/\#$, in the holographic memory field, is limited by the dynamic range of the material. For that reason, for practical materials suitable for manufacturing of VBG filters, that number will typically be rather limited (a realistic estimate is around 4 filters for a 4 mm thick element). Furthermore, fabrication of VBG filters with a larger number of gratings becomes progressively more complex, while at the same time reducing the flexibility in packaging them in a device. In addition, when

sharing the same volume, the combined effect of the VBGs can be obtained via the coherent addition of the effects of the individual gratings, which results in the appearance of cross-terms, leading sometimes to undesirable side effects. It is, therefore, desirable to have a practical method for manufacturing devices with sufficiently large channel count. According to one aspect of the invention, fiber optic devices can be fabricated which can have a basically unlimited number of channels while using very simple VBG elements as building blocks.

FIG. 12 depicts a device according to the invention in which any number of transmissive VBG filters can be combined to construct a device with an arbitrary channel count and for an arbitrary set of wavelengths. Preferably, the VBG filters are identical, thereby reducing the cost of fabrication. In this approach, the individual VBG elements are positioned on the main optical axis of the device and their tilt angles are adjusted individually in order to tune it to the peak wavelength of the desired channel. This approach may be referred to as "chain cascading."

As shown in FIG. 12, an optical input 1214 carries light 1204 having wavelengths $\lambda_1, \dots, \lambda_N$. Light 1204 is incident on a first VBG element 1232 along the optical axis x of the device. The first VBG 1232 is fabricated such that the light 1201 having wavelength λ_1 is deflected from the first VBG 1232 at a first angle α to the exit face 1232B of the VBG 1232. As shown, the VBG 1232 is positioned such that its grating vector A and exit face 1232B are perpendicular to the optical axis x of the device. Thus, the light 1201 having wavelength λ_1 is deflected from the first VBG 1232 at an angle $90^\circ - \alpha$ to the optical axis x of the device. The device may include a first optical receiver 1211 that receives the deflected beam 1201. The first VBG 1232 is transparent to the rest of the wavelengths $\lambda_2, \dots, \lambda_N$ in the input beam 1204, such that a transmitted beam 1205 having wavelengths $\lambda_2, \dots, \lambda_N$ is transmitted through the VBG 1232 along the optical axis x.

The transmitted beam 1205 is incident on a second VBG element 1234. The second VBG 1234 may be fabricated, like the first VBG 1232, such that light having wavelength λ_1 would be deflected from the second VBG 1234 at a first angle α to the exit face 1234B of the VBG 1234. As shown, the VBG 1234 is positioned such that its grating vector A and exit face 1234B are at a known angle θ ($>90^\circ$) to the optical axis x of the device. Light 1202 having wavelength λ_2 is deflected from the second VBG 1234 at a known angle β to the exit face 1234B of the VBG 1234 (and, therefore, at a known angle to the optical axis x). The device may include a second optical receiver 1212 that receives the deflected beam 1202. The second VBG 1234 is transparent to the rest of the wavelengths $\lambda_3, \dots, \lambda_N$ in the transmitted beam 1205, such that a second transmitted beam 1206 having wavelengths $\lambda_3, \dots, \lambda_N$ is transmitted through the VBG 1234 along the optical axis x.

The transmitted beam 1206 is incident on a third VBG element 1236. The third VBG 1236 may be fabricated, like the first VBG 1232, such that light having wavelength λ_1 would be deflected from the third VBG 1236 at a first angle α to the exit face 1236B of the VBG 1236. As shown, the VBG 1236 is positioned such that its grating vector A and exit face 1236B are at a known angle ϕ ($<90^\circ$) to the optical axis x of the device. Light 1203 having wavelength λ_3 is deflected from the third VBG 1236 at a known angle γ to the exit face 1236B of the VBG 1236 (and, therefore, at a known angle to the optical axis x). The device may include a third optical receiver 1213 that receives the deflected beam 1203. The third VBG 1236 is transparent to the rest of the wavelengths $\lambda_4, \dots, \lambda_N$ in the transmitted beam 1206, such that a third transmitted beam 1207 having wavelengths $\lambda_4, \dots, \lambda_N$ is transmitted through the

VBG 1236 along the optical axis x. The device may include a fourth optical receiver 1215 that receives the transmitted beam 1207.

FIG. 13 depicts a device according to the invention that includes a complex VBG filter element that has been fabricated from a number of simple, possibly identical, VBG elements. In function it is similar to the device described above in connection with FIG. 12 but instead of being positioned and adjusted individually in the package, the elements can be properly positioned in a suitable fixture in direct physical contact with one another and then permanently bonded together, using suitable bonding materials that are well known in the art, thus creating a single compounded element with complex functionality.

The positioning of the individual VBG elements with respect to one another in such an arrangement can be important to the usefulness of the assembly. Methods of exercising such control can include: a) proper surface preparation of the wafers of the recording material, such as polishing, parallelism of the surfaces etc.; b) proper rotational orientation of the elements with respect to each other during the bonding procedure; c) use of calibrated spacers to the adjust relative angle between the individual VBG elements; d) precise control of the tilt angle of the wafer with respect to the recording laser beams during the holographic recording process.

This approach, referred to as "lamination cascading," enables the achievement of the same density of the grating packing in the same package volume as the direct multiplexing of the filters during the recording process, but without the need of multiple exposures and without the physical overlap, and thus interference, of the individual filters in the bulk of the material.

As shown in FIG. 13, an optical input 1314 carries light 1304 having wavelengths $\lambda_1, \dots, \lambda_N$. Light 1304 is incident on a series of VBG elements 1332-1334 along the optical axis x of the device. The VBG elements 1332-1334 are fabricated such that light 1301 having wavelength λ_1 is deflected from the third VBG 1334 at a first angle α to the exit face 1334B of the VBG 1334, light 1302 having wavelength λ_2 is deflected from the third VBG 1334 at a second angle β to the exit face 1334B of the VBG 1334, and light 1303 having wavelength λ_3 is deflected from the third VBG 1334 at a third angle γ to the exit face 1334B of the VBG 1334. The device may include a first optical receiver 1311 that receives the deflected beam 1301, a second optical receiver 1312 that receives the deflected beam 1302, and a third optical receiver 1313 that receives the deflected beam 1303. The VBGs 1332-1334 may be transparent to the rest of the wavelengths $\lambda_4, \dots, \lambda_N$ in the input beam 1304, such that a transmitted beam 1305 having wavelengths $\lambda_4, \dots, \lambda_N$ is transmitted through the VBGs 1332-1334 along the optical axis x. The device may include a fourth optical receiver 1314 that receives the transmitted beam 1304.

FIG. 14 depicts a device according to the invention in which any simple, individual VBG element can be used for processing several wavelength channels by allowing multiple paths through it in different directions. In its simplest form, the so-called "double pass configuration" functions as follows:

A series of simple individual VBG elements is positioned in line as described above in connection with FIG. 12. A mirror is placed at the end of the chain of the elements, which reflects the transmitted light back onto the same elements. This has the effect of folding the chain of the elements back onto itself. The mirror angle is adjusted slightly, so that the angle of the back-reflected light is somewhat different than

the forward-propagating light. This angle is adjusted in such a way as to tune the center wavelength of the VBG filters to the desired value.

In such an implementation, the method allows using each of the VBG elements more than once, thus effectively increasing the number of filters without increasing the number of VBG elements, and thereby enabling the overall size of the package to remain practically the same. Multiple path folding is also possible if an additional mirror is used in the beginning of the chain of the VBG elements, slightly offset from the axis in angle and space.

As shown in FIG. 14, an optical input 1415 carries light 1405 having wavelengths $\lambda_1, \dots, \lambda_N$. Light 1405 is incident on a first VBG element 1432 along the optical axis x of the device. The first VBG 1432 is fabricated such that light 1401 having wavelength λ_1 is deflected from the first VBG 1432 at an angle α to the exit face 1432B of the first VBG 1432. The first VBG 1432 is transparent to the rest of the wavelengths $\lambda_2, \dots, \lambda_N$ in the input beam 1405, such that a transmitted beam 1406 having wavelengths $\lambda_2, \dots, \lambda_N$ is transmitted through the VBG 1432 along the optical axis x .

The transmitted beam 1406 is incident on a second VBG element 1434. The second VBG 1434 is fabricated such that light 1402 having wavelength λ_2 is deflected from the second VBG 1434 at an angle β to the exit face 1434B of the second VBG 1434. The second VBG 1434 is transparent to the rest of the wavelengths $\lambda_3, \dots, \lambda_N$ in the transmitted beam 1406, such that a transmitted beam 1407 having wavelengths $\lambda_3, \dots, \lambda_N$ is transmitted through the VBG 1434 along the optical axis x .

The transmitted beam 1407 is directed toward a mirror 1420, which is disposed at an angle ϕ to the optical axis x of the device. The reflected beam 1408 is incident on the second VBG 1434 at an angle ϕ to the exit face 1434B. The second VBG 1434 is fabricated such that light 1403 having wavelength λ_3 is deflected from the second VBG 1434 at an angle γ to the entrance face 1434A of the second VBG 1434. The second VBG 1434 is transparent to the rest of the wavelengths $\lambda_4, \dots, \lambda_N$ in the reflected beam 1408, such that a reflected beam 1409 having wavelengths $\lambda_4, \dots, \lambda_N$ is transmitted through the VBG 1434.

The reflected beam 1409 is incident on the first VBG 1432 at an angle ϕ to the exit face 1432B. The first VBG 1432 is fabricated such that light 1404 having wavelength λ_4 is deflected from the first VBG 1432 at an angle δ to the entrance face 1432A of the first VBG 1432. The first VBG 1432 is transparent to the rest of the wavelengths $\lambda_5, \dots, \lambda_N$ in the reflected beam 1409, such that a reflected beam 1410 having wavelengths $\lambda_5, \dots, \lambda_N$ is transmitted through the VBG 1432.

The device may include a first optical receiver that receives the deflected beam 1401, a second optical receiver that receives the deflected beam 1402, and a third optical receiver that receives the deflected beam 1403, and a fourth optical receiver that receives the deflected beam 1404. The device may also include a fifth optical receiver that receives the reflected beam 1410.

It should be understood that any of the techniques described above can be optimized to take maximum advantage of VBG properties such as: transparency to all but one wavelength, angular tunability, functionality distributed over the volume of a thick material, material rigidity and dimensional stability, excellent polishing qualities, and the like.

Methods for Economically Manufacturing VBG Elements

In the manufacturing of VBG elements, it is typically desirable to minimize the costs of production of such elements. For that reason, holographic recording of each element individually is likely to be cost-prohibitive for most or all of the

high-volume applications. A number of methods according to the invention for cost-effective production of such elements will now be described.

A first such method, depicted in FIG. 15, exploits the unique property of a hologram, whereupon each fractional piece of the recorded hologram possesses full and complete information about the recorded object. When applied to the VBG filters recorded on the PRG plates, it means that each piece of such plate, or wafer, should have the same filtering properties as the wafer in whole. For that reason, a large-size wafer 1500 can be diced, using a suitable cutting device, such as a saw, for example, into a large number of relatively small individual VBG elements 1502, each with complete filter functionality. In following this process, one could significantly reduce the number of recording and testing operations, thereby reducing the manufacturing costs of the VBG elements.

A second cost-reduction method according to the invention applies to the repetitive fabrication of the filter with identical properties. Such an approach is particularly suitable for high-volume production environments. In such circumstances reproduction of a filter with a complex shape, which may require, for example, multiple exposure steps to achieve the complete control over its spectral shape, may result in a prohibitively long and complex manufacturing operations. However, since holography allows true and complete reconstruction of the recorded wavefront, it is, therefore, possible to record a hologram of the reconstructed wavefront, rather than the true original, to achieve the same result.

This approach includes: a) placing a "virgin" recording wafer directly behind a recorded "master" hologram; and b) directing the reference beam onto the master hologram in exactly the same fashion as during the recording of the master. The transmitted reference wave and the reconstructed object wave interfere again behind the master hologram. Consequently, a new hologram is recorded on the virgin wafer, which is an exact replica of the master.

The advantages of this method include but are not limited to the following: a) better stability (not sensitive to the phase fluctuations); b) simpler setup (no filter shape control required); c) no polishing on the virgin wafer is required, if it is placed in direct contact with the master and an index matching fluid is used on the interface; and d) shorter cycle times (higher throughput).

Methods to Control the Filter Response Function

When used in practical applications such as in fiber-optic devices, for example, the spectral shape of a filter can be used to manipulate the wavelengths of light in a desired fashion. The filter shape can determine such device parameters as adjacent channel isolation, cross-talk, suppression ratio, etc. The ability to control the spectral shape of the VBG filters, therefore, can make the difference between a practically usable device and a practically useless one.

As follows from the general theory of Bragg diffraction (see Kogelnik), the spectral shape of the filter created by a VBG is related via a Fourier transform to the amplitude and phase envelope of the VBG along the general direction of propagation of the affected light wave. It is, therefore, desirable to be able to control both in order to create a filter with a desired spectral shape.

A method according to the invention for controlling the spectral shape of a VBG filter relates to the use of the Fourier transform property of a lens and the phase capturing ability of the holographic recording method. As depicted in FIG. 16A, a method 1600 for creating a VBG filter with any desired spectral shape can be performed as follows. A mask 1602 representing the desired filter shape is placed in the front focal

plane of a lens **1604** situated in the object arm of the holographic recording setup. The recording media sample **1606** (e.g., a glass wafer) is placed in the back focal plane of the same lens. The plane-wavefront reference beam of the holographic recording setup overlaps with the object beam on the sample, subtending it at an angle required by the target operational wavelength of the VBG filter being recorded.

When positioned as described, the lens creates a true Fourier transform of the mask directly on the recording medium. Via a coherent interference with the plane reference wave, both the amplitude and the phase of the Fourier transform are transferred to the amplitude and phase envelope of the VBG imprinted on the recording material. When reconstructed, or “read,” with a light beam nearly normal to the recorded grating planes, the spectral response of the VBG filter thus recorded will take the shape of the masks placed in the front focal plane of the lens.

This method allows for a single exposure recording of a filter with practically arbitrary complexity of the shape of the spectral response function and is referred to as the “parallel method” or the “holographic filter imprinting method.”

A holographic filter imprinting method according to the invention can be similarly applied to the task of shaping the filter response function of transmission VBG filters. It may be accomplished by choosing a proper orientation of the apodizing mask relative to the direction of the grating planes and, similarly, by choosing the proper entrance and exit faces on the VBG element.

Exemplary methods asks for creating transmissive and reflective VBGs are depicted in FIGS. **16B** and **16C** respectively. As shown, a mask **1612** having a slit **1614** can be placed in the front focal plane of the lens. Light shone through the mask will generate a square wave **1616**. As the light passes through the lens, the Fourier transform **1618** of the square wave will be imprinted on the sample **1620**. When reconstructed, the spectral response of the pattern **1622** recorded on the VBG filter **1620** will take the shape of a square wave **1624**. Depending on the orientation of the mask relative to the grating plane, the VBG can be made reflective (as shown in FIG. **16B**) or transmissive (as shown in FIG. **16C**).

Method for Controlling the Shape of Transmissive VBG Filters

Furthermore, when dealing with VBG filters functioning in the transmission geometry, a different approach can be taken in order to manipulate the spectral shape of the filter. In this case, the method, which is depicted in FIG. **17**, comprises multiple, sequential exposures of the same volume of the recording material. Each exposure would produce a simple plane VBG, but after recording multiple gratings a filter of an arbitrary shape will be constructed via coherent addition of the recorded VBGs. Volume Bragg gratings are physical representations of sinusoidal waves, and, therefore, their coherent sum is a Fourier transform of an envelope function.

For that reason, a close representation of an arbitrary amplitude and phase envelope function can be constructed via a series of holographic exposures, provided appropriate control is exercised over both the amplitude and the relative phase of the gratings recorded in such series of exposures. Such control can be achieved via employing techniques for active measurement and stabilization of the phase of the recorded VBGs.

As shown in FIG. **17**, a virgin sample **1702** is subjected to a first pair of incident beams **1712** and **1714**. Beam **1712** is incident on the entrance face **1702A** of the virgin sample **1702** at an angle α relative to the entrance face **1702A** (and, as shown, relative to the grating vector **A**). Beam **1714** is incident on the entrance face **1702A** of the virgin sample **1702** at

an angle β relative to the entrance face **1702A** (and, as shown, relative to the grating vector **A**). Thus, a first holographic sample **1704** is formed having a first holographic image **1722**.

The first holographic sample **1704** is then subjected to a second pair of incident beams **1716** and **1718**. Beam **1716** is incident on the entrance face **1704A** of the first holographic sample **1704** at an angle γ relative to the entrance face **1704A** (and, as shown, relative to the grating vector **A**). Beam **1718** is incident on the entrance face **1704A** of the first holographic sample **1704** at an angle δ relative to the entrance face **1704A** (and, as shown, relative to the grating vector **A**). Thus, a second holographic sample **1706** is formed having a second holographic image **1724**.

VBG Chip

FIG. **18** depicts an integrated VBG “chip” according to the invention. As shown, the VBG chip **1800** is a monolithic glass structure into which a plurality of holographic images or “gratings” have been recorded. An optical input **1815** carries light **1805** having wavelengths $\lambda_1, \dots, \lambda_N$. Light **1805**, which may be collimated, is incident on a first grating **1822**. Grating **1822** is recorded such that light **1801** having wavelength λ_1 is deflected at an angle such that it is received by grating **1832**. Grating **1832** is recorded such that it deflects the light **1801** out of the chip **1800** toward an optical receiver **1811**. Grating **1822** is transparent to the rest of the wavelengths $\lambda_2, \dots, \lambda_N$ in the input beam **1805**, such that a transmitted beam **1806** having wavelengths $\lambda_2, \dots, \lambda_N$ is transmitted through the grating **1822**.

The transmitted beam **1806** is incident on grating **1824**, which is recorded such that light **1802** having wavelength λ_2 is deflected at an angle such that it is received by grating **1834**. Grating **1834** is recorded such that it deflects the light **1802** out of the chip **1800** toward an optical receiver **1812**. Grating **1824** is transparent to the rest of the wavelengths $\lambda_3, \dots, \lambda_N$ in the beam **1806**, such that a transmitted beam **1807** having wavelengths $\lambda_3, \dots, \lambda_N$ is transmitted through the grating **1824**.

Similarly, the transmitted beam **1807** is incident on grating **1826**, which is recorded such that light **1803** having wavelength λ_3 is deflected at an angle such that it is received by grating **1836**. Grating **1836** is recorded such that it deflects the light **1803** out of the chip **1800** toward an optical receiver **1813**. Grating **1826** is transparent to the rest of the wavelengths $\lambda_4, \dots, \lambda_N$ in the beam **1807**, such that a transmitted beam **1808** having wavelengths $\lambda_4, \dots, \lambda_N$ is transmitted through the grating **1826**.

The transmitted beam **1808** is incident on grating **1828**, which is recorded such that light **1804** having wavelength λ_4 is deflected at an angle such that it is received by grating **1838**. Grating **1838** is recorded such that it deflects the light **1804** out of the chip **1800** toward an optical receiver **1814**. Grating **1828** is transparent to the rest of the wavelengths $\lambda_5, \dots, \lambda_N$ in the beam **1808**, such that a transmitted beam **1809** having wavelengths $\lambda_5, \dots, \lambda_N$ is transmitted through the grating **1828**. The transmitted beam **1809** is directed toward an optical receiver **1815**. As shown, each of the optical receivers **1811-1814** and **1816** can be an optical fiber, for example. Any or all of the optical receivers **1811-1814** and **1816** can be bundled together to form an optical fiber ribbon, for example.

A VBG chip as shown can be made according to the following method. One or more incident beams are directed toward a first location of a virgin sample (to form grating **1822**, for example). Then, the beams are turned off, and either the sample or the source of illumination is positioned (e.g., the sample may be moved laterally and/or rotationally as necessary) such that the incident beam(s) may now be directed toward a second location on the sample (to form

15

grating **1824**, for example). This process is repeated until all desired gratings have been recorded.

Thus, there have been described fiber optic devices comprising volume Bragg gratings and methods for fabricating the same. Those skilled in the art will appreciate that numerous changes and modifications can be made to the preferred embodiments of the invention, and that such changes and modifications can be made without departing from the spirit of the invention. Examples of devices that can be made in accordance with the invention include, without limitation, 1×N laser source combiners, multi-channel transmit/receive modules (including triplexers), optical add-drop multiplexers, terminal multiplexers, network monitors, wavelength lockers, tunable filters, tunable gain equalizers, dispersion compensators, and the like.

What is claimed:

1. A method for manufacturing a three-dimensional Bragg grating element, the method comprising:

forming a first Bragg grating element using a pair of recording beams, the first Bragg grating element having a three-dimensional Bragg grating recorded therein; and using a single recording beam to replicate the first Bragg grating element to form a second Bragg grating element

16

having recorded therein a replica of the Bragg grating recorded in the first Bragg grating element.

2. The method of claim **1**, further comprising:
placing a virgin recording medium directly behind the first Bragg grating element; and

using the single recording beam to replicate the first Bragg grating to form the second Bragg grating in the virgin recording medium, thereby forming the second Bragg grating element.

3. The method of claim **1**, wherein the single recording beam interferes with a reconstructed object wave behind the first Bragg grating to form the replica in the virgin recording medium.

4. The method of claim **1**, wherein forming the first Bragg grating element comprises directing at least one of the pair of recording beams onto a first recording medium, the method further comprising:

directing the single recording beam onto the first Bragg grating element in the same fashion as the at least one of the pair of recording beams was directed onto the first Bragg grating element during the formation of the first Bragg grating element.

* * * * *