

Liquid Capacitive Inclinometer providing Temperature Compensated 2-Wire Current Loop 4..20mA Output



Description

The NGi Series of inclinometers are liquid capacitive gravity based sensors with integrated sensor and excitation electronics. The thermal drift of the primary sensor is further compensated by an electronic equalization of the temperature.

An integrated highly stable voltage regulator makes it possible to supply the inclinometer from any unregulated supply or battery as low as +8V and up to +30VDC. The measuring principle assures a linear angle output with 4..20mAs calibrated to equal the measuring range of the sensor. The measuring time constant can be ordered with longer rise times as an option. The power is obtained from the measurement current loop, thereby eliminating the need for a separate power supply and enabling operation with a two wire connection.

Applications

The NGi Series with its current loop output is well suited for industrial use in a noisy environment where high temperature changes occur and non-stable supply voltages are present.

For additional functionality the **SB1i** (single axis) and **SB2i** (dual axis) inclinometer sensor packages have both zero and gain adjustments. The SB2i is available with ATEX or CSA Certification for Intrinsic Safety.


Typically used in building and bridge construction, mining, radar alignment systems, pitch and roll, agricultural and construction equipment, and process machinery.

Features

- Temperature compensated 4..20mA output
- Non regulated +8..+30VDC input
- Integrated sensor electronics with 4..20mA excitation
- Linear output characteristics
- 2 wire connection - sensor power obtained from the current loop
- High measurement accuracy
- Minimal linearity errors
- High long-term stability
- EMC protected
- Vibration and shock insensitive due to non mechanical internal parts
- Sensor electronically isolated from housing
- Sensor zero mechanically adjusted with mounting ring
- Current loop limitation


MODEL SPECIFICATIONS	NG2i	NG3i	NG4i
MEASURING RANGE	±10°	±30°	±80°
RESOLUTION	< 0.001°	< 0.003°	< 0.01°
SENSITIVITY	0.8mA/°	0.266mA/°	0.1mA/°
MAX. NON-LINEARITY	< 1*10 ⁻³ FS		
TRANSVERSE SENSITIVITY	<1% at 45° tilt		
RESPONSE TME	< 0.3 Sec. (<300mSec), (optional 1s, 2s, 3s)		
TEMPERATURE DRIFT OF SENSITIVITY	<-0.01% /°C		
TEMPERATURE DRIFT OF ZERO	<±10 ⁻³ %/°C		
ZERO OFFSET	12mA		
POWER SUPPLY	8..30VDC non-regulated (either polarity)		
CURRENT CONSUMPTION	Approx. 10mA		
MECHANICAL CHARACTERISTICS			
HOUSING	30% Glass Filled PBT Plastic		
ENVIRONMENTAL PROTECTION	IP65		
MOUNTING	Flat Vertical Surface with Supplied Mounting Ring		
OUTLINE DIMENSIONS	Ø 1.92" (Ø 48.8mm) X 0.85" (21.6mm) h		
	With Mounting Ring: Ø 2.64" (Ø 67mm) X .85" (21.6mm) h		
ELECTRICAL CONNECTION	Ø 0.182" (Ø 4.6mm) Cable x 1.65' (0.5m) (2-wire pigtails leads)		
WEIGHT	Approx. 3.88 ounces (110 grams) (not including mounting ring)		
OPERATING TEMPERATURE	-40°F to +185°F (-40° to +85°C)		
STORAGE TEMPERATURE	-49°F to +194°F (-45° to +90°C)		
CABLE WIRING TABLE:			
BROWN	+VDC input or output		
WHITE	+VDC input or output		
<i>Note: wires are interchangeable.</i>			

Figure 1: Block Diagram

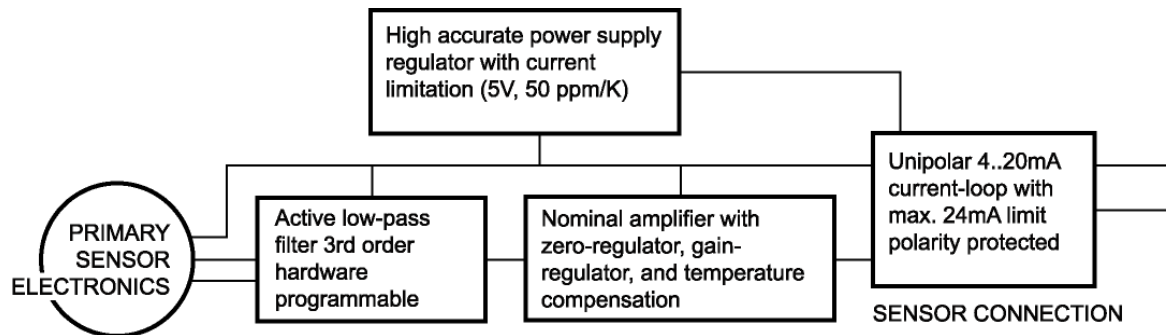

The information and material presented may not be published, broadcast, rewritten, or redistributed without the expressed written consent of Rieker® Inc.
 The content presented is provided for informational purposes only and subject to change.
 ©2002-2015 Rieker® Inc. All Rights Reserved.
 FORM NUMBER: SK0009_07/02 UPDATED: 8/31/15

Figure 2: Wiring Connections

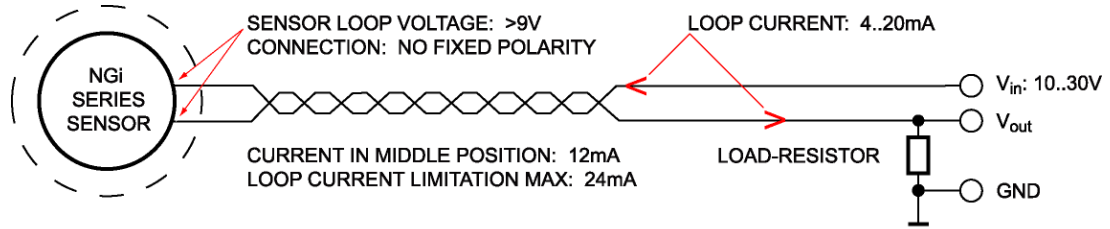

MINIMUM LOOP CURRENT = Sensor Power + Amplifier < 4mA

$V_{in} \text{ MIN} = 9V + \text{VOLTAGE DROP IN CABLE} + \text{VOLTAGE DROP of LOAD-RESISTOR @ 20mA}$

$V_{in} \text{ MIN} = 9V + (20\text{mA} \times R [\text{CABLE}]) + (20\text{mA} \times R [\text{LOAD}])$

Example 1: ($R_{\text{cable}} 100\text{m}: 2 \times 0.14\text{mm}^2$) $0.6V + (R_{\text{load}}: 100\text{ohm}) 2V + 9V = 11.6V (V_{in} \text{ MIN})$

Example 2: ($R_{\text{cable}} 2\text{km}: 2 \times 0.5\text{mm}^2$) $3.2V + (R_{\text{load}}: 500\text{ohm}) 10V + 9V = 22.2V (V_{in} \text{ MIN})$

Figure 3: Dimensions and Mounting Position (inches [mm])

