
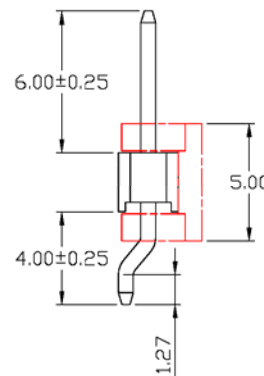


RECOMMENDED P. C. B. LAYOUT

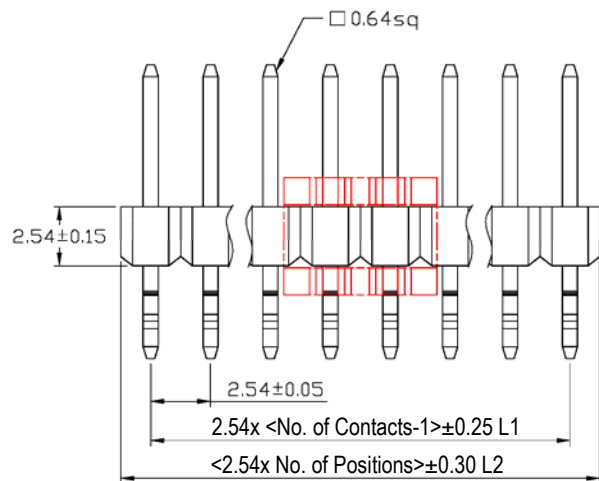

SPECIFICATIONS

- Current Rating: 3 amps
- Voltage Rating: 230V
- Contact Material: Brass
- Contact Resistance: 20 milliohms max.
- Insulator material: Polyester, UL 94V-0 Nylon 6T
- Insulation Resistance: 5000 megohms min.
- Withstanding: 1000 VAC for 1 min.
- Operating temp: -40°C to +105°C
- Processing temp: 230°C for 30 sec.

Series	Rows	Pos.	Type	Mating Length	Finish	Options
APH	X	XX	RASMA	XX	XX	XX
Pin header, 0.100" pitch	1=Single row 2=Dual rows	Single row 3-30 Dual row 6-60	Right angle surface mount	SD=0.230" or custom	SGXX=Duplex GDXX=Gold XX=Flash if blank, 10, 15, 30µ" gold TN=Tin	[blank]=None PPL=Cap TR=Tape & reel PPT=Acetate tape CP=Centering pin

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **APH-1-XX-RASMA-XX-XX-XX**

Description: 2.54 Pin Header Single Row Entry Side SMT Connector