
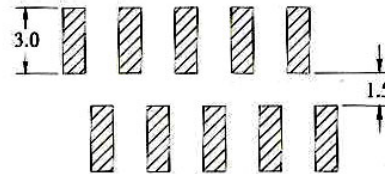



SPECIFICATIONS

Insulator Material: Nylon 6T, glass reinforced, UL94V-0
 Contact Material: Phosphor Bronze
 Current Rating: 1 Amp DC
 Contact Resistance: 30mΩ max.
 Insulation Resistance: 3000 MΩ min.
 Withstanding: 500V AC for 1 minute
 Operating Temp: -40C to +105C

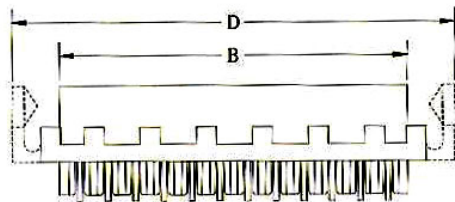

RECOMMENDED P.C. BOARD LAYOUT

Dimensions				
Item	A	B	C	D
4	3.81	5.60	7.10	9.70
6	6.35	8.14	9.70	12.30
8	8.89	10.68	12.20	14.80
10	11.43	13.22	14.70	17.30
12	13.97	15.76	17.30	19.90
14	16.51	18.30	19.80	22.40
16	19.05	20.84	22.40	25.00
18	21.59	23.38	24.90	27.50
20	24.13	25.92	27.40	30.00

Ordering Information						
Series	Positions	Contact Material	Contact Plating	Polarization	Locking Ramp	Color
A28D	XX	B	XX	X	X	G
Micro Match Miniature	04-20 See Chart	Phos. Bronze	T=Tin SG=Selective Gold GDXX=Gold XX=Flash if blank 5, 10, 15, 30u"	A=With B=Without	A=With B=Without	G=Red

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/07/08
				Checked	Lizzy	04/07/08
				Drawn	Tina	04/07/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **A28D-XX-B-XX-X-X-G**

Description: Micro-Match Miniature Connector