

SPECIFICATIONS

Antenna Type: Monopole Antenna
 Frequency Range: 2.45GHz±50MHz
 Impedance: 50 Ohms
 Gain: <0 dBi
 VSWR: <2.5
 Admitted Power Radiation: 3W
 Type of Radiation: Omni
 Polarization: Vertical
 Electrical Length: 1/4λ
 Standard Connector: SMA (Male)
 Storage Temperature: -30°C ~ +75°C
 Operation Temperature: -20°C ~ +65°C

Item	Name	Material	Finish
1	Antenna Cover	PU	Black
2	Connector (SMA)	Brass	Golden

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919


Part No.: **ANT-010-SMA-1**

Description: Miniature RF antenna with SMA connector

(1) Polar : H-plane
 Freq.(MHz) : 2450
 Peak Gain (dBi) : -2.77
 Peak angle : 161.00
 Avg. Gain(dBi) : -5.43


Freq.(MHz)	2450MHz
Band	2400 MHz
	2.36

Antenna Pattern & EIRP Measurement

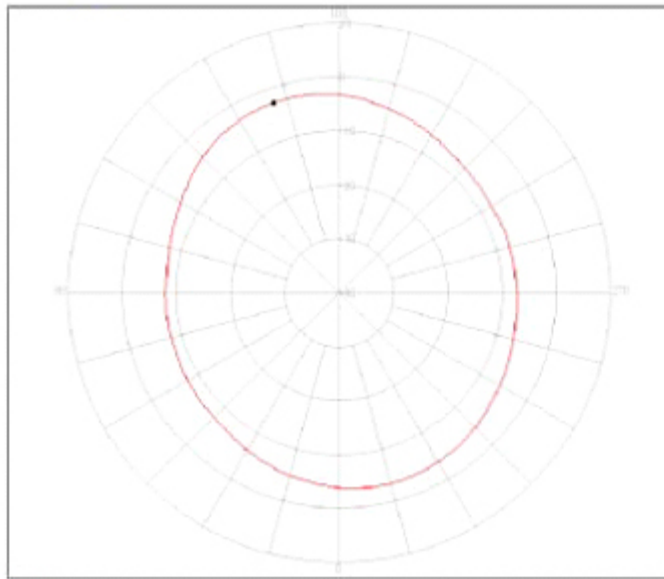

Pattern	Model No.	Test Mode	Freq(MHz)	Peak Gain(dBi)	Peak angle	Avg. Gain(dBi)	Source Polar.	Date
1	21B01A-A01-1	2400MHz	2450.00	-2.77	161.00	-5.43	Yee	2007/05/16

VSWR Measurement

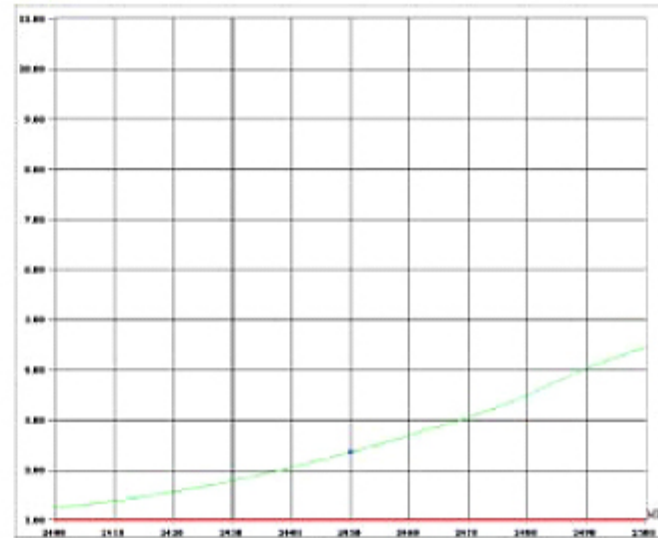

Freq(MHz)	VSWR(dB)
2400	2.36

Model No.: 21B01A-A01-1

Test Mode: 2400MHz

Test date: 2007/05/17

at 7M0143

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **ANT-010-SMA-1**
 Description: Miniature RF antenna with SMA connector