


SPECIFICATIONS

Contact material: Brass
 Contact plating: Tin or gold flash over nickel
 Insulator material: PBT

$A = 2.54 * (\text{No of Spaces} - 1)$
 $B = A + 2.54 \pm 0.35$

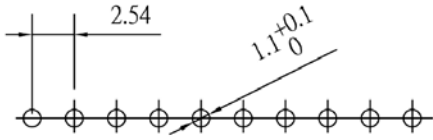

P.C.Board Layout

| Series | Rows | Positions | Contact length | Plating |
|--------------------------|------------------------------|----------------------------|---|--|
| APH | X | XX | CSL | XX |
| Pin header, 2.54mm pitch | 1=Single row 2=Double row | 1-40 single 2-80 double | CSL= customer specified length See diagram | TN=Tin SGXX=Selective gold GDXX=Gold XX=Flash if blank; 15, 30, 50μ" gold |

RoHS compliant

| Rev. | Description | Date | Approved | Drawing | Name | Date |
|------|-------------|------|----------|------------|-------------|-------------|
| | | | | Approved | Howard | 08/10/99 |
| | | | | Checked | Lizzy | 08/10/99 |
| | | | | Drawn | Tina | 08/10/99 |
| | | | | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3' |
| | | | | | UNIT: mm | |

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **APH-1-XX-CSL(.315/1.005)-XX**

Description: Pin header, 2.54mm pitch, single row, straight, 15mm tail for wire wrap