
Dual 4-5-Input OR/NOR Gate

The MC10H209 is a Dual 4-5-input OR/NOR gate. This MECL part is a functional/pinout duplication of the MECL III part MC1688.

- Propagation Delay Average, 0.75 ns Typical
- Power Dissipation 125 mW Typical
- Improved Noise Margin 150 mV (Over Operating Voltage and • Temperature Range)
- Voltage Compensated
- MECL 10K–Compatible




MC10H209



PLCC CASE 775-02

LOGIC DIAGRAM 3 5 6 2 7 0 10 14 11 15 12 13 V_{CC1} = PIN 1 V_{CC2} = PIN 16 V_{EE} = PIN 8

DIP **PIN ASSIGNMENT**



Pin assignment is for Dual-in-Line Package. For PLCC pin assignment, see the Pin Conversion Tables on page 6–11 of the Motorola MECL Data Book (DL122/D).

VCC1	1	16	
AOUT	2	15	
AOUT	3	14	
A _{IN}	4	13	
A _{IN}	5	12	
A _{IN}	6	11	
AIN	7	10	

MOTOROLA

MAXIMUM RATINGS

Characteristic	Symbol	Rating	Unit
Power Supply ($V_{CC} = 0$)	VEE	-8.0 to 0	Vdc
Input Voltage (V _{CC} = 0)	VI	0 to V _{EE}	Vdc
Output Current — Continuous — Surge	lout	50 100	mA
Operating Temperature Range	Т _А	0 to +75	°C
Storage Temperature Range — Plastic — Ceramic	T _{stg}	–55 to +150 –55 to +165	°C ℃

ELECTRICAL CHARACTERISTICS (VFF = -5.2 V ±5%) (See Note)

		0	0	2	5°	7	′5°	
Characteristic	Symbol	Min	Max	Min	Max	Min	Max	Unit
Power Supply Current	ΙE	Ι	I	_	30	I	—	mA
Input Current High	linH	Ι	640	_	400	I	400	μΑ
Input Current Low	l _{inL}	0.5		0.5		0.3	—	μΑ
High Output Voltage	VOH	-1.02	-0.84	-0.98	-0.81	-0.92	-0.735	Vdc
Low Output Voltage	VOL	-1.95	-1.63	-1.95	-1.63	-1.95	-1.60	Vdc
High Input Voltage	VIH	-1.17	-0.84	-1.13	-0.81	-1.07	-0.735	Vdc
Low Input Voltage	VIL	-1.95	-1.48	-1.95	-1.48	-1.95	-1.45	Vdc


AC PARAMETERS

^t pd	0.4	1.15	0.4	1.15	0.4	1.15	ns
tr	0.4	1.5	0.4	1.5	0.4	1.6	ns
t _f	0.4	1.5	0.4	1.5	0.4	1.6	ns
	^t pd t _r t _f	t _r 0.4	t _r 0.4 1.5	t _r 0.4 1.5 0.4	t _r 0.4 1.5 0.4 1.5	t _r 0.4 1.5 0.4 1.5 0.4	t _r 0.4 1.5 0.4 1.5 0.4 1.6


NOTE:

Each MECL 10H series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 lfpm is maintained. Outputs are terminated through a 50-ohm resistor to -2.0 volts.

OUTLINE DIMENSIONS

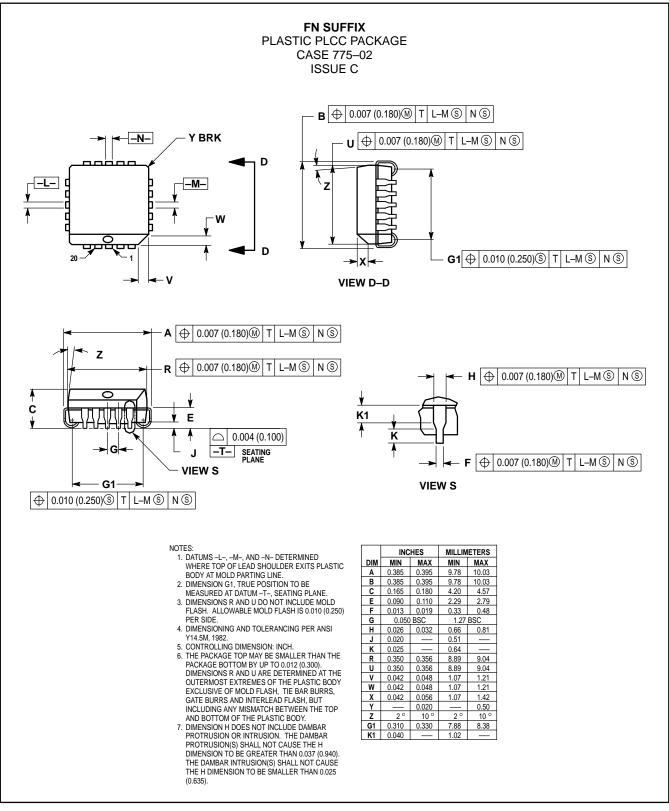

OUTLINE DIMENSIONS

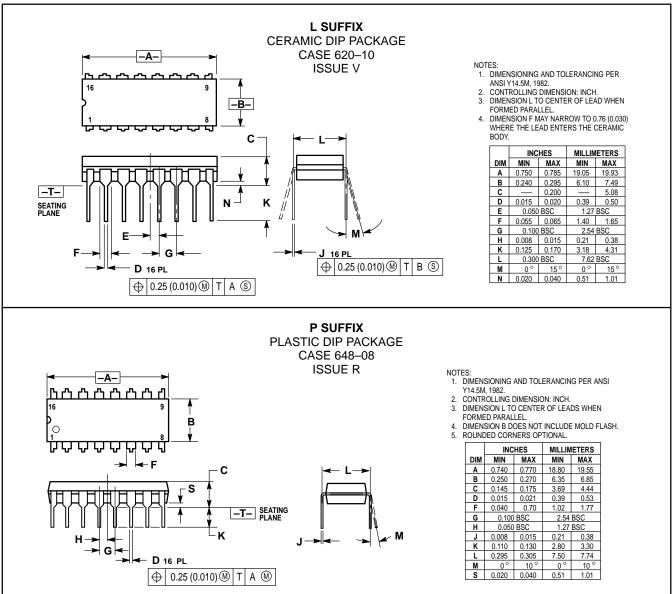

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and *w* are registered trademarks of Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447 or 602–303–5454

 \Diamond

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 INTERNET: http://Design-NET.com JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–81–3521–8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298

