


PROCESS DETAILS

Process	GLASS PASSIVATED MESA
Die Size	90 x 90 MILS
Die Thickness	8.6 MILS ± 0.6 MILS
MT1 Bonding Pad Area	59 x 36 MILS
Gate Bonding Pad Area	16 x 16 MILS
Top Side Metalization	Al - 45,000Å
Back Side Metalization	Al/Mo/Ni/Ag - 20,000Å/5,000Å/5,000Å/2,000Å

GEOMETRY

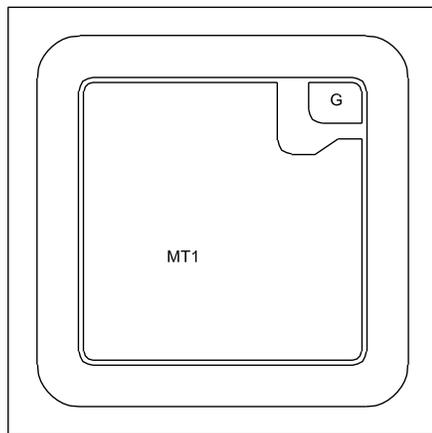

BACKSIDE MT2

R0

GROSS DIE PER 4 INCH WAFER

1,310

PRINCIPAL DEVICE TYPES

2N6075A
CQ202-4MS
CQ223-4M
CQD-4M


R3 (22-March 2010)

PROCESS CPQ090


Typical Electrical Characteristics




Typical Gate-Trigger Current

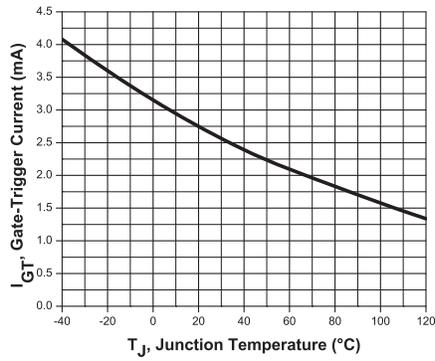

Typical Gate-Trigger Voltage

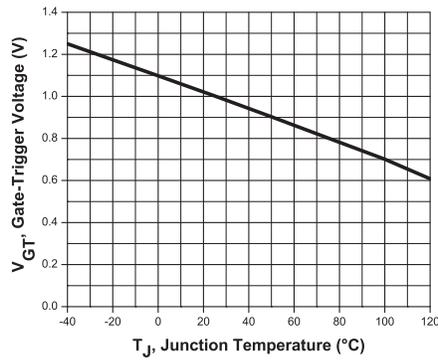


Typical On-State Voltage

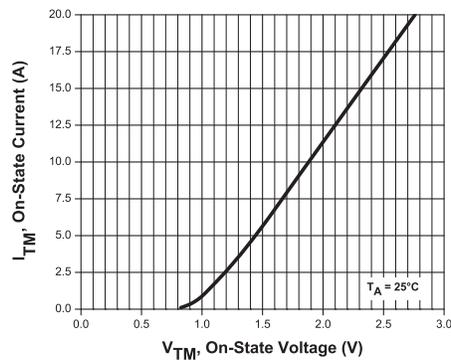

R3 (22-March 2010)

BARE DIE PACKING OPTIONS




BARE DIE IN TRAY (WAFFLE) PACK

CT: Singulated die in tray (waffle) pack.

(example: CP211-PART NUMBER-CT)

CM: Singulated die in tray (waffle) pack 100% visually inspected as per MIL-STD-750, (method 2072 transistors, method 2073 diodes).


(example: CP211-PART NUMBER-CM)

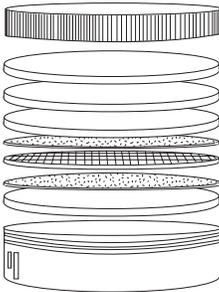

UNSAWN WAFER

WN: Full wafer, unsawn, 100% tested with reject die inked.

(example: CP211-PART NUMBER-WN)

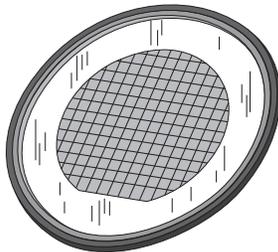


SAWN WAFER ON PLASTIC RING

WR: Full wafer, sawn and mounted on plastic ring, 100% tested with reject die inked.

(example: CP211-PART NUMBER-WR)

Please note: Sawn Wafer on Metal Frame (WS) is possible as a special order. Please contact your Central Sales Representative at 631-435-1110.



R1 (10-February 2017)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centalsemi.com

Worldwide Field Representatives:
www.centalsemi.com/wwreps

Worldwide Distributors:
www.centalsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centalsemi.com/terms