# **Quad 2-Input Multiplexer** (Non-Inverting)

The MC10158 is a quad two channel multiplexer. A common select input determines which data inputs are enabled. A high (H) level enables data inputs D00, D10, D20, and D30 and a low (L) level enables data inputs D01, D11, D21, and D31.


 $P_D$  = 197 mW typ/pkg (No Load)  $t_{pd}$  = 2.5 ns typ (Data to Q) 3.2 ns typ (Select to Q)  $t_r$ ,  $t_f$  = 2.5 ns typ (20%–80%)

## **LOGIC DIAGRAM** SE-LECT 9 D01 5 D00 6 D11 3 2 Q1 D10 4 D21 12 15 Q2 D20 13 D31 10 14 Q3 D30 11 V<sub>CC</sub> = PIN 16 VEE = PIN 8


#### **TRUTH TABLE**

Select	D0	D1	Q
L	Х	L	L
L	Х	Н	Н
Н	L	Х	L
Н	Н	Х	Н

### MC10158



#### DIP PIN ASSIGNMENT



Pin assignment is for Dual-in-Line Package. For PLCC pin assignment, see the Pin Conversion Tables on page 6–36 of the Motorola MECL Data Book (DL122/D).

#### **ELECTRICAL CHARACTERISTICS**

			Test Limits							
		Pin Under	−30°C		+25°C		+85°C		1 1	
Characteristic	Symbol	Test	Min	Max	Min	Тур	Max	Min	Max	Unit
Power Supply Drain Current	ΙE	8		53		38	48		53	mAdc
Input Current	l <sub>inH</sub>	9 5		360 400			225 250		225 250	μAdc
	linL	5	0.5		0.5			0.3		μAdc
Output Voltage Logic 1	Voн	1	-1.060	-0.890	-0.960		-0.810	-0.890	-0.700	Vdc
Output Voltage Logic 0	VOL	1	-1.890	-1.675	-1.850		-1.650	-1.825	-1.615	Vdc
Threshold Voltage Logic 1	VOHA	1	-1.080		-0.980			-0.910		Vdc
Threshold Voltage Logic 0	V <sub>OLA</sub>	1		-1.655			-1.630		-1.595	Vdc
Switching Times (50Ω Load)										ns
Propagation Data Input Delay Select Input	t5-1- t9+1+	1 1	1.3 2.5	3.1 4.8	1.2 2.4	2.5 3.2	3.0 4.5	1.3 2.5	3.2 4.8	
Rise Time (20 to 80%)	t <sub>1+</sub>	1	1.6	3.4	1.5	2.5	3.3	1.6	3.4	
Fall Time (20 to 80%)	t <sub>1-</sub>	1	1.6	3.4	1.5	2.5	3.3	1.6	3.4	


#### **ELECTRICAL CHARACTERISTICS** (continued)

					TEST VOLTAGE VALUES (Volts)				
@ Test Temperature			V <sub>IHmax</sub>	V <sub>ILmin</sub>	VIHAmin	V <sub>ILAmax</sub>	VEE		
			–30°C	-0.890	-1.890	-1.205	-1.500	-5.2	
			+25°C	-0.810	-1.850	-1.105	-1.475	-5.2	
			+85°C	-0.700	-1.825	-1.035	-1.440	-5.2	
		Pin TEST VOLTAGE APPLIED TO PINS LISTED BELOW				BELOW			
Characteristic		Symbol	Under Test	V <sub>IHmax</sub>	V <sub>ILmin</sub>	VIHAmin	V <sub>ILAmax</sub>	VEE	(VCC)
Power Supply Drain Current		ΙE	8					8	16
Input Current		linH	9 5	9 5				8 8	16 16
		l <sub>inL</sub>	5		5			8	16
Output Voltage	Logic 1	Vон	1	5				8	16
Output Voltage	Logic 0	Vol	1					8	16
Threshold Voltage	Logic 1	Vона	1			5		8	16
Threshold Voltage	Logic 0	V <sub>OLA</sub>	1				5	8	16
Switching Times	(50 $\Omega$ Load)			+1.11V	+0.31V	Pulse In	Pulse Out	−3.2 V	+2.0 V
Propagation Delay	Data Input Select Input	t5–1– t9+1+	1 1	6		5 9	1 1	8 8	16 16
Rise Time	(20 to 80%)	t <sub>1+</sub>	1			5	1	8	16
Fall Time	(20 to 80%)	t <sub>1-</sub>	1			5	1	8	16


Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50–ohm resistor to –2.0 volts. Test procedures are shown for only one gate. The other gates are tested in the same manner.

MOTOROLA 3–62

#### **OUTLINE DIMENSIONS**

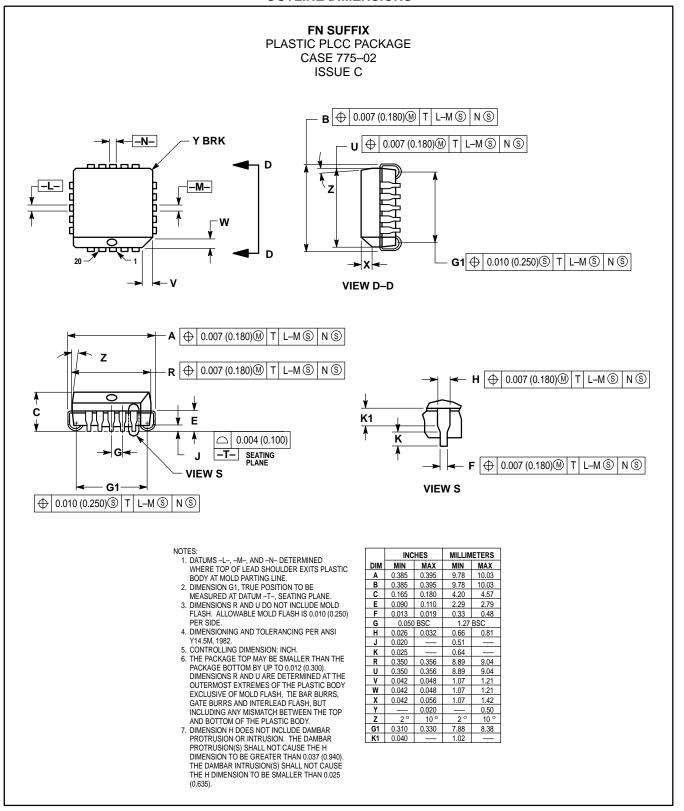


#### **OUTLINE DIMENSIONS**

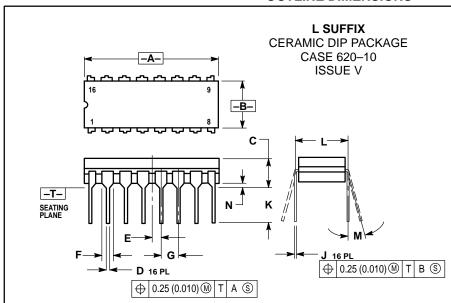

#### NOTES:

- DIMENSIONING AND TOLERANCING PER
- ANSI Y14.5M, 1982. CONTROLLING DIMENSION: INCH.
- DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
- DIMENSION F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC

	INC	HES	MILLIMETERS		
DIM	MIN MAX		MIN	MAX	
Α	0.750	0.785	19.05	19.93	
В	0.240	0.295	6.10	7.49	
С		0.200	_	5.08	
D	0.015 0.020		0.39	0.50	
Е	0.050	BSC	1.27 BSC		
F	0.055 0.065		1.40	1.65	
G	0.100	) BSC	2.54 BSC		
Н	0.008	0.015	0.21	0.38	
K	0.125	0.170	3.18	4.31	
L	0.300	BSC	7.62 BSC		
M	0°	15°	0°	15°	
N	0.020	0.040	0.51	1.01	

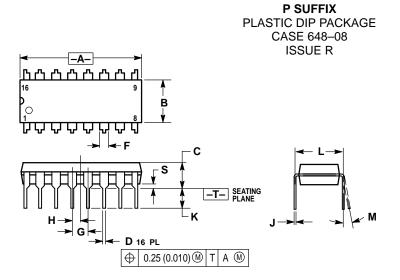

- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ANSI
- Y14.5M, 1982. CONTROLLING DIMENSION: INCH.
- DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
- DIMENSION B DOES NOT INCLUDE MOLD FLASH.
- ROUNDED CORNERS OPTIONAL

	INC	HES	MILLIMETERS			
DIM	MIN	MAX	MIN	MAX		
Α	0.740	0.770	18.80	19.55		
В	0.250	0.270	6.35	6.85		
С	0.145	0.175	3.69	4.44		
D	0.015	0.015 0.021		0.53		
F	0.040	0.70	1.02	1.77		
G	0.100	BSC	2.54 BSC			
Н	0.050	BSC	1.27 BSC			
J	0.008	0.015	0.21	0.38		
K	0.110	0.130	2.80	3.30		
L	0.295	0.305	7.50	7.74		
M	0°	10 °	0°	10 °		
S	0.020	0.040	0.51	1.01		

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and (A) are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

#### How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447 or 602-303-5454

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 INTERNET: http://Design-NET.com

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-81-3521-8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



MC10158/D