

# High Speed Triple Line Receiver


The MC10216 is a high speed triple differential amplifier designed for use in sensing differential signals over long lines. The base bias supply ( $V_{BB}$ ) is made available at pin 11 to make the device useful as a Schmitt trigger, or in other applications where a stable reference voltage is necessary.

Active current sources provide the MC10216 with excellent common mode noise rejection. If any amplifier in a package is not used, one input of that amplifier must be connected to  $V_{BB}$  (pin 11) to prevent upsetting the current source bias network.

Complementary outputs are provided to allow driving twisted pair lines, to enable cascading of several amplifiers in a chain, or simply to provide complement outputs of the input logic function.

$P_D = 100 \text{ mW typ/pkg (No Load)}$   
 $t_{pd} = 1.8 \text{ ns typ (Single ended)}$   
 $\quad = 1.5 \text{ ns typ (Differential)}$   
 $t_r, t_f = 1.5 \text{ ns typ (20\%–80\%)}$

### LOGIC DIAGRAM

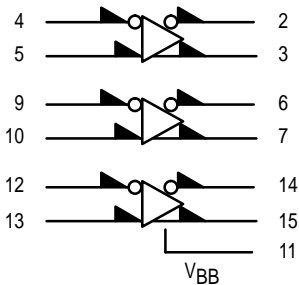


$V_{CC1} = \text{PIN } 1$   
 $V_{CC2} = \text{PIN } 16$   
 $V_{EE} = \text{PIN } 8$

\* $V_{BB}$  to be used to supply bias to the MC10216 only and bypassed (when used) with 0.01  $\mu\text{F}$  to 0.1  $\mu\text{F}$  capacitor.  
When the input pin with bubble goes positive, it's respective output pin with bubble goes positive.

## MC10216



**L SUFFIX**  
CERAMIC PACKAGE  
CASE 620-10




**P SUFFIX**  
PLASTIC PACKAGE  
CASE 648-08



**FN SUFFIX**  
PLCC  
CASE 775-02

### DIP PIN ASSIGNMENT

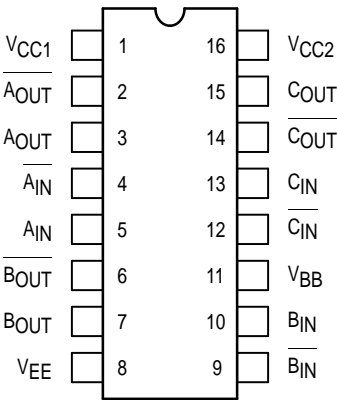

Pin assignment is for Dual-in-Line Package.  
For PLCC pin assignment, see the Pin Conversion  
Tables on page 6-36 of the Motorola MECL Data  
Book (DL122/D).



## ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Pin Under Test	Test Limits							Unit
			−30°C		+25°C			+85°C		
			Min	Max	Min	Typ	Max	Min	Max	
Power Supply Drain Current	I <sub>E</sub>	8		27		20	25		27	mAdc
Input Current	I <sub>inH</sub>	4		180			115		115	μAdc
	I <sub>CBO</sub>	4 9		1.5 1.5			1.0 1.0		1.0 1.0	μAdc
Output Voltage    Logic 1	V <sub>OH</sub>	2 3	−1.060 −1.060	−0.890 −0.890	−0.960 −0.960		−0.810 −0.810	−0.890 −0.890	−0.700 −0.700	Vdc
Output Voltage    Logic 0	V <sub>OL</sub>	2 3	−1.890 −1.890	−1.675 −1.675	−1.850 −1.850		−1.650 −1.650	−1.825 −1.825	−1.615 −1.615	Vdc
Threshold Voltage    Logic 1	V <sub>OHA</sub>	2 3	−1.080 −1.080		−0.980 −0.980			−0.910 −0.910		Vdc
Threshold Voltage    Logic 0	V <sub>OLA</sub>	2 3		−1.655 −1.655			−1.630 −1.630		−1.595 −1.595	Vdc
Reference Voltage	V <sub>BB</sub>	11	−1.420	−1.280	−1.350		−1.230	−1.295	−1.150	Vdc
Switching Times    (50Ω Load)										ns
Propagation Delay	t <sub>4+2+</sub>	2	1.0	2.6	1.0	1.8*	2.5	1.0	2.8	
	t <sub>4−2−</sub>	2	1.0	2.6	1.0	1.8*	2.5	1.0	2.8	
	t <sub>4+3−</sub>	3	1.0	2.6	1.0	1.8*	2.5	1.0	2.8	
	t <sub>4−3+</sub>	3	1.0	2.6	1.0	1.8*	2.5	1.0	2.8	
Rise Time            (20 to 80%)	t <sub>2+</sub>	2	1.0	2.6	1.0	1.5	2.5	1.0	2.8	
	t <sub>3+</sub>	3	1.0	2.6	1.0	1.5	2.5	1.0	2.8	
Fall Time            (20 to 80%)	t <sub>2−</sub>	2	1.0	2.6	1.0	1.5	2.5	1.0	2.8	
	t <sub>3−</sub>	3	1.0	2.6	1.0	1.5	2.5	1.0	2.8	

\* Delay is 1.5ns when inputs are driven differentially.  
 Delay is 1.8ns when inputs are driven single ended.


**ELECTRICAL CHARACTERISTICS** (continued)

@ Test Temperature  −30°C +25°C +85°C			TEST VOLTAGE VALUES (Volts)						(V <sub>CC</sub> ) Gnd
			V <sub>IHmax</sub>	V <sub>ILmin</sub>	V <sub>IHamin</sub>	V <sub>ILAmx</sub>	V <sub>BB</sub>	V <sub>VEE</sub>	
			−0.890	−1.890	−1.205	−1.500	From Pin 11	−5.2	
			−0.810	−1.850	−1.105	−1.475		−5.2	
			−0.700	−1.825	−1.035	−1.440		−5.2	
Characteristic	Symbol	Pin Under Test	TEST VOLTAGE APPLIED TO PINS LISTED BELOW						
			V <sub>IHmax</sub>	V <sub>ILmin</sub>	V <sub>IHamin</sub>	V <sub>ILAmx</sub>	V <sub>BB</sub>	V <sub>VEE</sub>	
Power Supply Drain Current	I <sub>E</sub>	8	4, 9, 12				5, 10, 13	8	1, 16
Input Current	I <sub>inH</sub>	4	4	9, 12			5, 10, 13	8	1, 16
	I <sub>CBO</sub>	4 9		9, 12 4, 12			5, 10, 13 5, 10, 13	8, 4 8, 9	1, 16
Output Voltage      Logic 1	V <sub>OH</sub>	2 3	4 9, 12	9, 12 4			5, 10, 13 5, 10, 13	8 8	1, 16 1, 16
Output Voltage      Logic 0	V <sub>OL</sub>	2 3	9, 12 4	4 9, 12			5, 10, 13 5, 10, 13	8 8	1, 16 1, 16
Threshold Voltage      Logic 1	V <sub>OHA</sub>	2 3	9, 12	9, 12	4	4	5, 10, 13 5, 10, 13	8 8	1, 16 1, 16
Threshold Voltage      Logic 0	V <sub>OLA</sub>	2 3	9, 12	9, 12	4	4	5, 10, 13 5, 10, 13	8 8	1, 16 1, 16
Reference Voltage	V <sub>BB</sub>	11					5, 10, 13	8	1, 16
Switching Times      (50Ω Load)					Pulse In	Pulse Out		−3.2 V	+2.0 V
Propagation Delay	t <sub>4+2+</sub>	2			4	2	5, 10, 13	8	1, 16
	t <sub>4−2−</sub>	2			4	2	5, 10, 13	8	1, 16
	t <sub>4+3−</sub>	3			4	3	5, 10, 13	8	1, 16
	t <sub>4−3+</sub>	3			4	3	5, 10, 13	8	1, 16
Rise Time      (20 to 80%)	t <sub>2+</sub>	2			4	2	5, 10, 13	8	1, 16
	t <sub>3+</sub>	3			4	3	5, 10, 13	8	1, 16
Fall Time      (20 to 80%)	t <sub>2−</sub>	2			4	2	5, 10, 13	8	1, 16
	t <sub>3−</sub>	3			4	3	5, 10, 13	8	1, 16

Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50-ohm resistor to −2.0 volts. Test procedures are shown for only one gate. The other gates are tested in the same manner.

## OUTLINE DIMENSIONS

**FN SUFFIX**  
**PLASTIC PLCC PACKAGE**  
**CASE 775-02**  
**ISSUE C**

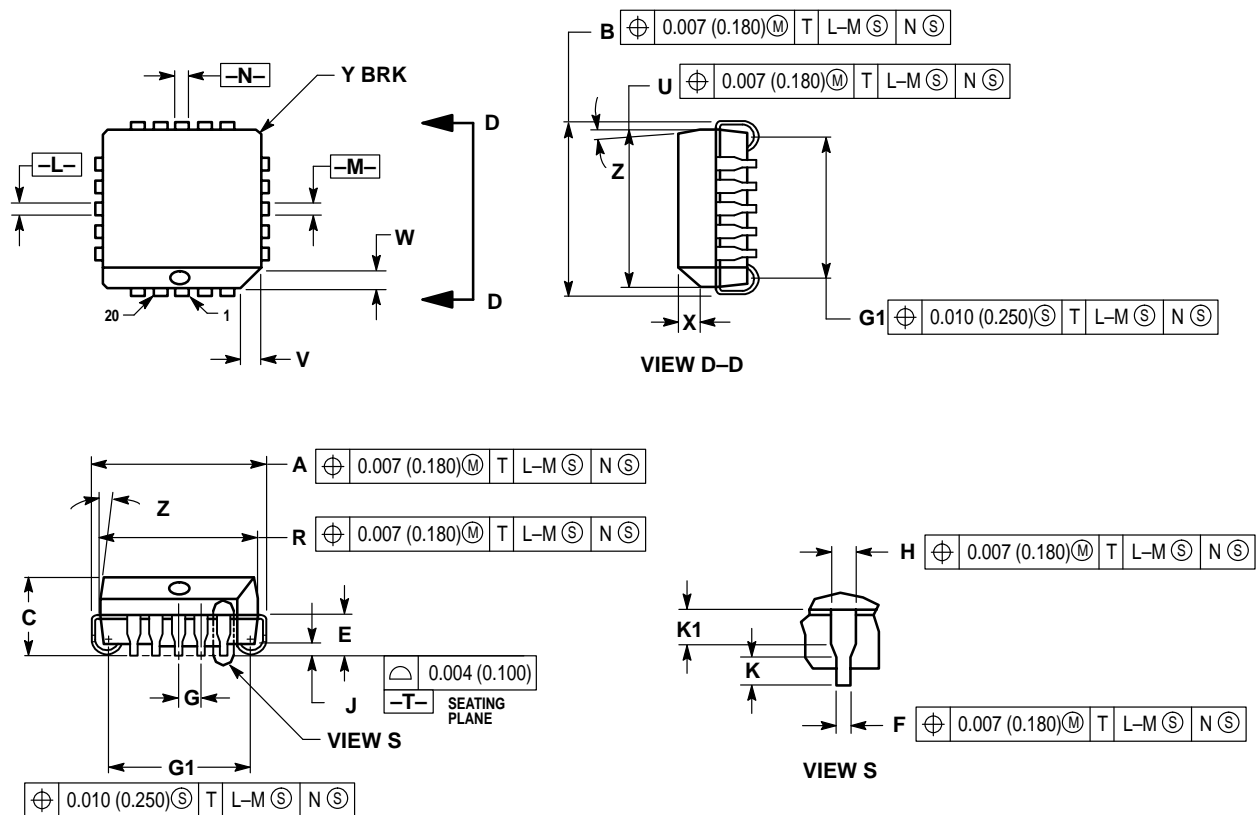


## NOTES:

- DATUMS -L-, -M-, AND -N- DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
- DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.
- DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.
- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.385	0.395	9.78	10.03
B	0.385	0.395	9.78	10.03
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050 BSC		1.27 BSC	
H	0.026	0.032	0.66	0.81
J	0.020	—	0.51	—
K	0.025	—	0.64	—
R	0.350	0.356	8.89	9.04
U	0.350	0.356	8.89	9.04
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	—	0.020	—	0.50
Z	2°	10°	2°	10°
G1	0.310	0.330	7.88	8.38
K1	0.040	—	1.02	—


## OUTLINE DIMENSIONS

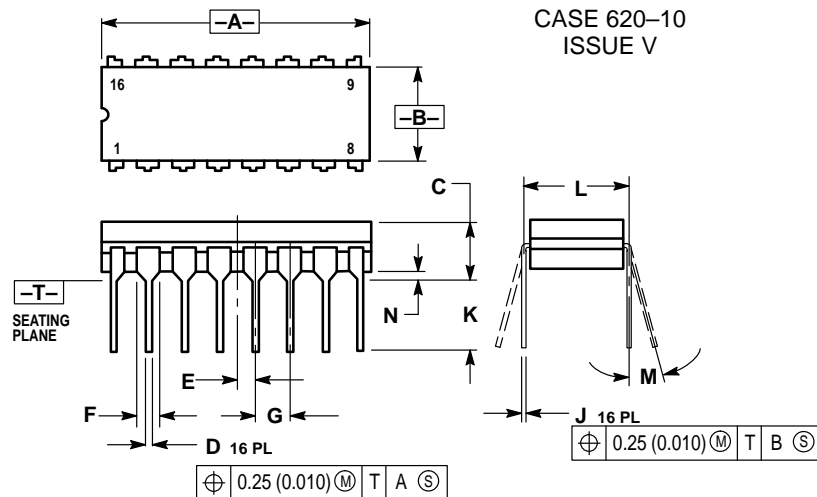**L SUFFIX**  
**CERAMIC DIP PACKAGE**  
**CASE 620-10**  
**ISSUE V**


## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
4. DIMENSION F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC BODY.


DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.750	0.785	19.05	19.93
B	0.240	0.295	6.10	7.49
C	—	0.200	—	5.08
D	0.015	0.020	0.39	0.50
E	0.050 BSC		1.27 BSC	
F	0.055	0.065	1.40	1.65
G	0.100 BSC		2.54 BSC	
H	0.008	0.015	0.21	0.38
K	0.125	0.170	3.18	4.31
L	0.300 BSC		7.62 BSC	
M	0°	15°	0°	15°
N	0.020	0.040	0.51	1.01

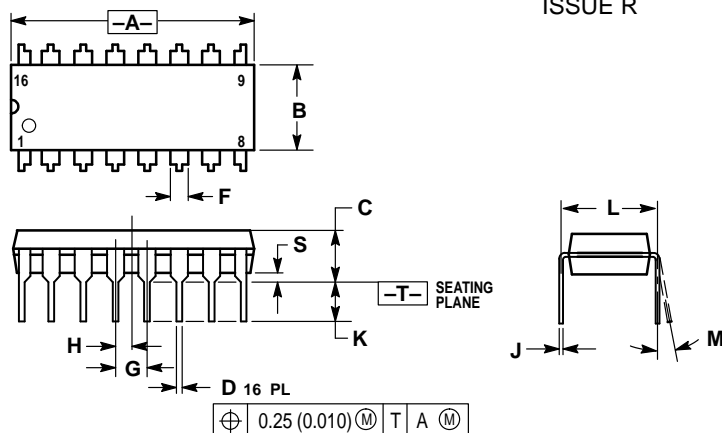**P SUFFIX**  
**PLASTIC DIP PACKAGE**  
**CASE 648-08**  
**ISSUE R**


## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.740	0.770	18.80	19.55
B	0.250	0.270	6.35	6.85
C	0.145	0.175	3.69	4.44
D	0.015	0.021	0.39	0.53
F	0.040	0.70	1.02	1.77
G	0.100 BSC		2.54 BSC	
H	0.050 BSC		1.27 BSC	
J	0.008	0.015	0.21	0.38
K	0.110	0.130	2.80	3.30
L	0.295	0.305	7.50	7.74
M	0°	10°	0°	10°
S	0.020	0.040	0.51	1.01

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

## How to reach us:

**USA/EUROPE/Locations Not Listed:** Motorola Literature Distribution;  
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447 or 602-303-5454

**JAPAN:** Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center,  
3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-81-3521-8315

**MFAX:** RMFA00@email.sps.mot.com – TOUCHTONE 602-244-6609  
**INTERNET:** <http://Design-NET.com>

**ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

