

AC-DC MINI 40W


CT-401WPXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL, cUL, GS, CB, CE, CCC, BSMI, FCC standard
- Meet EPS 2.0 LEVEL V



Dimension:

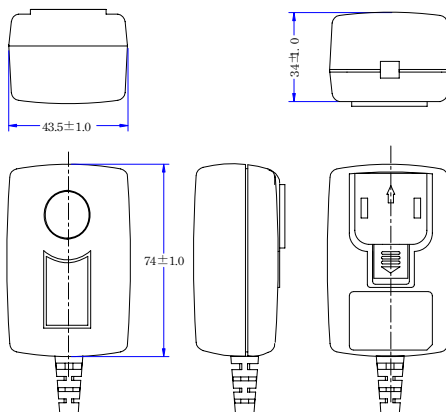

Model No.	Output		Additional Safety
CT-401WP12	12V	3A	
CT-401WP19	19V	2.1A	
CT-401WP20	20V	2.0A	
CT-401WP24	24V	1.67A	

Specification:

REV.02 2009.9.10



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	1A
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃; Storage: -10~+75℃
	Humidity	Operating: 20%~85%; Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1, CSA C22.2 No.60950-1, EN60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15, EN55022, EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY

AC-DC MINI 40W


CT-403DAXX

Features:



- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CB,CE,FCC standard
- Meet EPS 2.0 LEVEL V



Dimension:



Model No.	Output		Additional Safety
CT-403DA12	12V	3.3A	,CCC,BSMI
CT-403DA19	19V	2.1A	,CCC,BSMI
CT-403DA20	20V	2.0A	,CCC,BSMI
CT-403DA24	24V	1.7A	,CCC,BSMI
CT-403DA48	48V	085A	



Specification:

REV.03 2010.9.16



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	1A
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY

AC-DC 40W




CT-407DAXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,FCC,GS,CB,CE standard
- Meet EPS 2.0 LEVEL V



Dimension:



Model No.	Output		Additional Safety
CT-407DA08	8 V	3 A	
CT-407DA09	9 V	3 A	
CT-407DA12A	12 V	3 A	
CT-407DA12	12 V	3.3 A	
CT-407DA15	15 V	2.7 A	
CT-407DA19	19 V	2.1 A	
CT-407DA24	24 V	1.67 A	
CT-407DA36	36 V	1.1 A	
CT-407DA48	48 V	0.83 A	

Specification:

2011.7.28 REV.01



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	1.0A
	Leakage Current	< 0.25mA
Others	Start up time	<2000mS @ Minimum AC input
	Rise time	<20mS
	Hold up time	>20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non condensing)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	Emission	FCC PART 15, Subpart B, Class B EN55022, EN61000-3
	Immunity	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY

AC-DC 40W




CT-407DBXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,FCC,GS,CB,CE standard
- Meet EPS 2.0 LEVEL V



Dimension:



Model No.	Output		Additional Safety
CT-407DB08	8 V	3 A	
CT-407DB09	9 V	3 A	
CT-407DB12A	12 V	3 A	
CT-407DB12	12 V	3.3 A	
CT-407DB15	15 V	2.7 A	
CT-407DB19	19 V	2.1 A	
CT-407DB24	24 V	1.67 A	
CT-407DB36	36 V	1.1 A	
CT-407DB48	48 V	0.83 A	

Specification:

2011.7.28 REV.01



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	1.0A
	Leakage Current	< 3.5mA
Others	Start up time	<2000mS @ Minimum AC input
	Rise time	<20mS
	Hold up time	>20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non condensing)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	Emission	FCC PART 15, Subpart B, Class B EN55022, EN61000-3
	Immunity	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY

AC-DC 40W





CT-407DNXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,FCC,GS,CB,CE standard
- Meet EPS 2.0 LEVEL V



Dimension:



Model No.	Output		Additional Safety
CT-407DN08	8 V	3 A	
CT-407DN09	9 V	3 A	
CT-407DN12A	12 V	3 A	
CT-407DN12	12 V	3.3 A	
CT-407DN15	15 V	2.7 A	
CT-407DN19	19 V	2.1 A	
CT-407DN24	24 V	1.67 A	
CT-407DN36	36 V	1.1 A	
CT-407DN48	48 V	0.83 A	

Specification:

2011.7.28 REV.01



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	1.0A
	Leakage Current	<3.5mA
Others	Start up time	<2000mS @ Minimum AC input
	Rise time	<20mS
	Hold up time	>20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non condensing)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	Emission	FCC PART 15, Subpart B, Class B EN55022, EN61000-3
	Immunity	EN55024(EN61204-3) EN61000-4

