

AC-DC 6W


CT-066WPx

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CB,CE,FCC,RCM,BSMI,CCC standard
- Meet EPS 2.0 LEVEL V



Dimension:

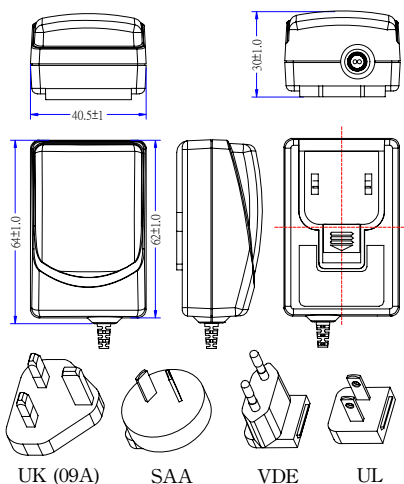

Model No.	Output		Additional Safety
CT-066WP33	3.3V	1.8A	
CT-066WP05	5V	1.2A	
CT-066WP06	6V	1A	
CT-066WP09	9V	0.67A	
CT-066WP12	12V	0.5A	
CT-066WP15	15V	0.4A	

IV

Specification:

REV.03 2011.7.26



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	300mA
	Leakage Current	< 0.1mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY


AC-DC 6W

CT-068WUXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,CB,FCC,BSMI standard
- Meet EPS 2.0 LEVEL V

Dimension:

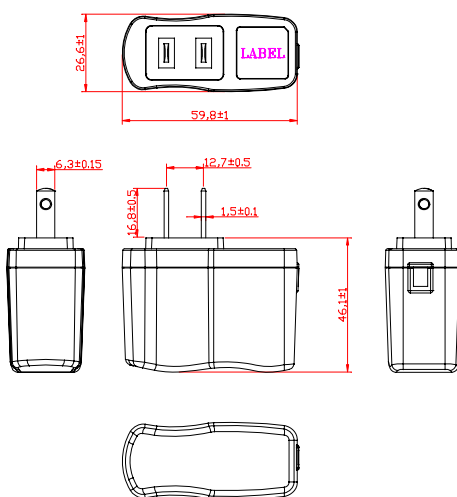

Model No.	Output		Additional Safety
CT-068WU03	3.3V	1.8A	
CT-068WU04	4V	1.5A	
CT-068WU05	5V	1.2A	
CT-068WU06	6V	1.0A	
CT-068WU09	9V	0.67A	
CT-068WU12	12V	0.5A	
CT-068WU15	15V	0.4A	
CT-068WU18	18V	0.33A	
CT-068WU24	24V	0.25A	

Specification:

REV.02 2011.6.30



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47~63Hz
	Current	300mA
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C; Storage: -10~+75°C
	Humidity	Operating: 20%~85%; Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1, CSA C22.2 No.60950-1, EN60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15, EN55022, EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY


AC-DC 6W

CT-068WTXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- GS,CB,CE standard
- Meet EPS 2.0 LEVEL V

Dimension:

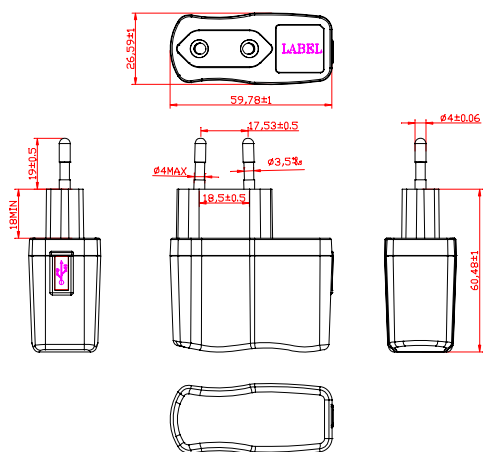

Model No.	Output		Additional Safety
CT-068WT03	3.3V	1.8A	
CT-068WT04	4V	1.5A	
CT-068WT05	5V	1.2A	
CT-068WT06	6V	1.0A	
CT-068WT09	9V	0.67A	
CT-068WT12	12V	0.5A	
CT-068WT15	15V	0.4A	
CT-068WT18	18V	0.33A	
CT-068WT24	24V	0.25A	

Specification:

REV.01 2011.3.2



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	300mA
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Conversing)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY


AC-DC 6W

CT-068WEXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- GS,CB,CE standard
- Meet EPS 2.0 LEVEL V

Dimension:

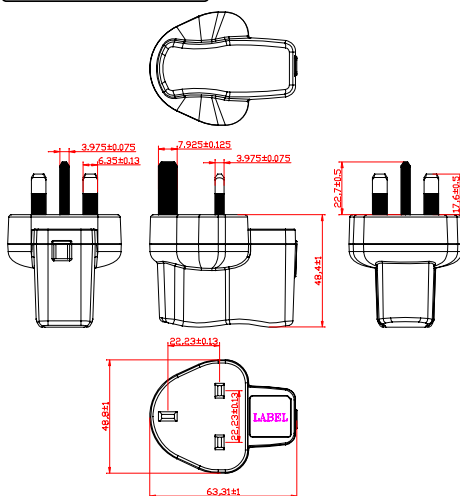

Model No.	Output		Additional Safety
CT-068WE03	3.3V	1.8A	
CT-068WE04	4V	1.5A	
CT-068WE05	5V	1.2A	
CT-068WE06	6V	1.0A	
CT-068WE09	9V	0.67A	
CT-068WE12	12V	0.5A	
CT-068WE15	15V	0.4A	
CT-068WE18	18V	0.33A	
CT-068WE24	24V	0.25A	

Specification:

REV.01 2011.3.2



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47~63Hz
	Current	300mA
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1, CSA C22.2 No.60950-1, EN60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15, EN55022, EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY


AC-DC 6W

CT-068WSXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- RCM,CB,CE standard
- Meet EPS 2.0 LEVEL V

Dimension:

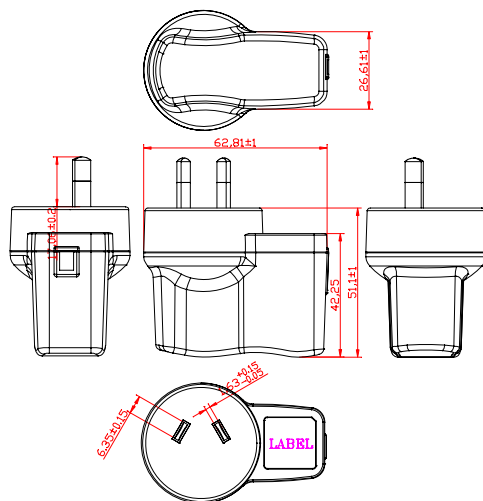

Model No.	Output		Additional Safety
CT-068WS03	3.3V	1.8A	
CT-068WS04	4V	1.5A	
CT-068WS05	5V	1.2A	
CT-068WS06	6V	1.0A	
CT-068WS09	9V	0.67A	
CT-068WS12	12V	0.5A	
CT-068WS15	15V	0.4A	
CT-068WS18	18V	0.33A	
CT-068WS24	24V	0.25A	

Specification:

REV.01 2011.6.23



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47~63Hz
	Current	300mA
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1, CSA C22.2 No.60950-1, EN60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15, EN55022, EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY


AC-DC 6W

CT-068WSXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- RCM,CB,CE standard
- Meet EPS 2.0 LEVEL V

Dimension:

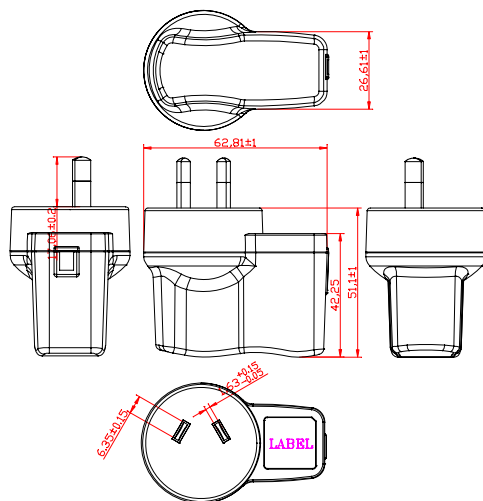

Model No.	Output		Additional Safety
CT-068WS03	3.3V	1.8A	
CT-068WS04	4V	1.5A	
CT-068WS05	5V	1.2A	
CT-068WS06	6V	1.0A	
CT-068WS09	9V	0.67A	
CT-068WS12	12V	0.5A	
CT-068WS15	15V	0.4A	
CT-068WS18	18V	0.33A	
CT-068WS24	24V	0.25A	

Specification:

REV.01 2011.6.23



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47~63Hz
	Current	300mA
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1, CSA C22.2 No.60950-1, EN60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15, EN55022, EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY


AC-DC 6W

CT-068WU05B

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requiemnt
- 100% burn in test
- 1 year warranty
- UL,cUL,CB,FCC,BSMI standard
- Meet EPS 2.0 LEVEL V

Dimension:

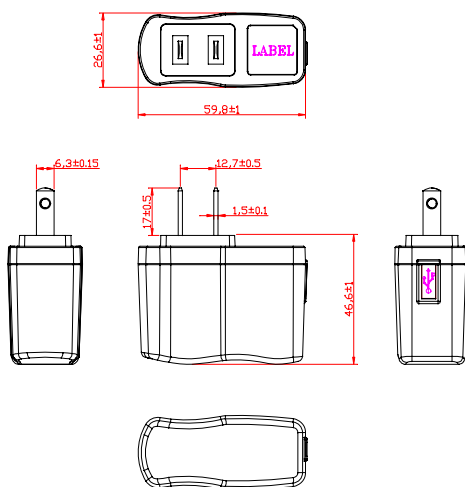

Model No.	Output		Additional Safety
CT-068WU05B	5V	1.2A	

Specification:

REV.03 2011.7.29



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	300mA
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non condensing)
M.T.B.F	50k Hours	
Safety	UL 60950-1, CSA C22.2 No.60950-1, EN60950-1, IEC 60950-1	
	UL 60065, 7th Edition 2007-12-1 CAN/CSA-22.2 No. 60065-03, 1ST Edition 2006-04 + A1:2006	
EMC	Emission	FCC PART 15, Subpart B, Classs B EN55022, EN61000-3
	Immunity	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY


AC-DC 6W

3A-068WE05B

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- GS,CB,CE standard
- Meet EPS 2.0 LEVEL V

Dimension:

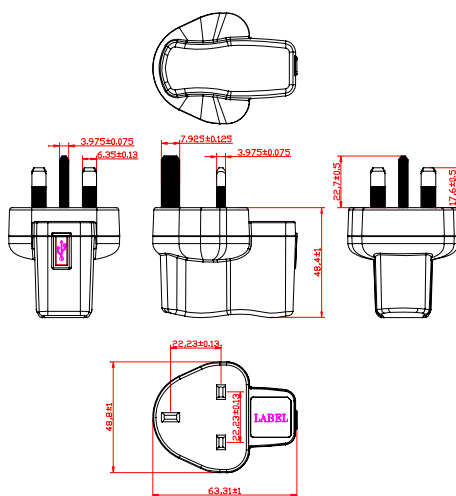


Model No.	Output	Additional Safety
CT-068WE05B	5V 1.2A	

Specification:

REV.01 2011.3.2



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	300mA
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1, CSA C22.2 No.60950-1, EN60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY


AC-DC 6W

CT-068WT05B

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- GS,CB,CE standard
- Meet EPS 2.0 LEVEL V

Dimension:

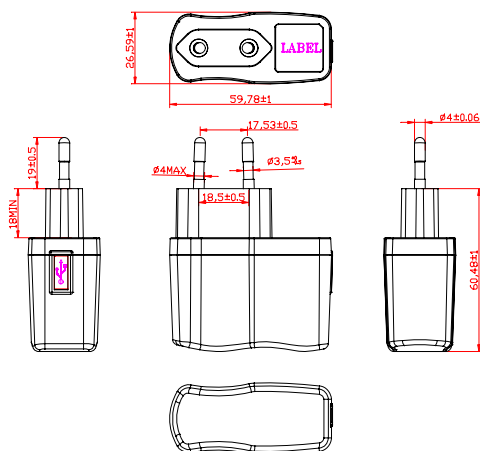

Model No.	Output	Additional Safety
CT-068WT05B	5V 1.2A	

Specification:

REV.01 2011.3.2



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	300mA
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Conversing)
M.T.B.F	50k Hours	
Safety	UL 60950-1, CSA C22.2 No.60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY


AC-DC 6W

CT-068WS05B

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- RCM,CB,CE standard
- Meet EPS 2.0 LEVEL V

Dimension:

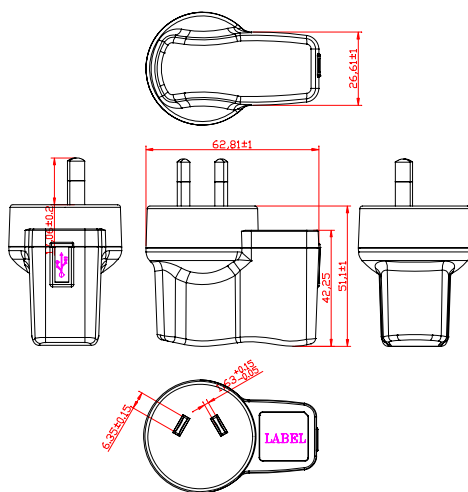

Model No.	Output		Additional Safety
CT-068WS05B	5V	1.2A	

Specification:

REV.01 2011.6.23



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	300mA
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Conversing)
M.T.B.F	50k Hours	
Safety	UL 60950-1, CSA C22.2 No.60950-1, EN60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15, EN55022, EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4

