

AC-DC 15W


CT-154WPXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,FCC,GS,CB,CE,RCM,BSMI standard
- Meet EPS 2.0 LEVEL V



Dimension:

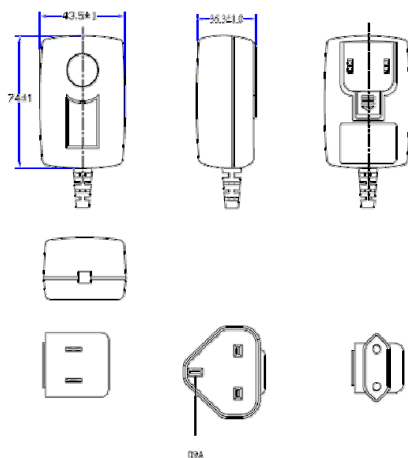

Model No.	Output		Additional Safety
CT-154WP05	5V	2.6	CCC
CT-154WP06	6V	2.5	
CT-154WP09	9V	1.7	

Specification:

REV.02 2011.3.24



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	600mA
	Leakage Current	< 0.25mA
Others	Start up time	<200mS @ Minimum AC input
	Rise time	<100mS
	Hold up time	>15mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



AC-DC 15W


CT-165DAXX

Features:



- Universal AC Input 90~264Vac
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL, cUL, GS, CB, CE, IRAM standard
- Meet EPS 2.0 LEVEL V



Dimension:

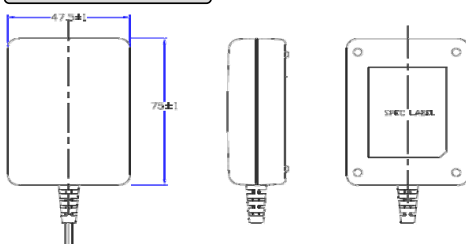

Model No.	Output		Additional Safety
CT-165DA-05	5V	2.6A	CCC
CT-165DA-12	12V	1.25A	RCM



Specification:

REV.03 2011.09.15



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	400mA
	Leakage Current	< 0.25mA
Others	Start up time	<5000mS @ Minimum AC input
	Rise time	<100mS
	Hold up time	>20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1, CSA C22.2 No.60950-1, EN60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4

