

ADAPTER POWER SUPPLY

AC-DC 18W



CT-182WTxx

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- Meet CEC requirement
- 100% burn in test
- 1 year warranty
- GS,CE,CB
- Meet EPS 2.0 LEVEL V



Dimension:



Model No.	Output		Additional Safety
CT-182WT05	5V	3.2A	
CT-182WT06	6	3A	
CT-182WT12	12V	1.5A	
CT-182WT15	15V	1.2A	

Specification:

REV.01 2010.05.31



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	500mA
	Leakage Current	< 0.25mA
Others	Start up time	< 3500mS @Rated minimum AC input
	Rise time	< 50mS
	Hold up time	>10mS @ 110Vac/60Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Conversing)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,IEC 60950-1	
EMC	EMI	FCC PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY


AC-DC 18W

CT-182WUXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- Meet CEC requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,CB,PSE,FCC
- Meet EPS 2.0 LEVEL V

Dimension:

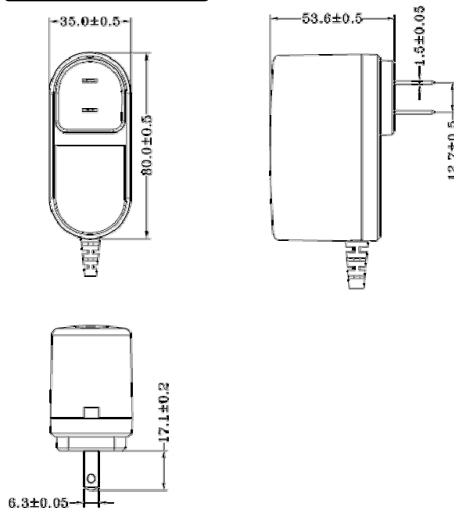

Model No.	Output		Additional Safety
CT-182WU05	5V	3.2A	
CT-182WU06	6	3A	
CT-182WU12	12V	1.5A	
CT-182WU15	15V	1.2A	

Specification:

REV.01 2010.05.31



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	500mA
	Leakage Current	< 0.25mA
Others	Start up time	< 3500mS @Rated minimum AC input
	Rise time	< 50mS
	Hold up time	> 10mS @ 110Vac/60Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F		50k Hours
Safety		UL 60950-1, CSA C22.2 No.60950-1, IEC 60950-1
EMC	EMI	FCC PART 15, EN55022, EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



AC-DC 18W


CT-183WPXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CB,CE,RCM,IRAM,CCC,BSMI,FCC standard
- Meet EPS 2.0 LEVEL V



Dimension:

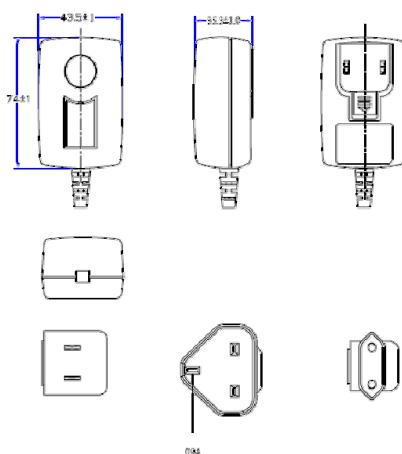

Model No.	Output		Additional Safety
CT-183WP09	9V	2A	
CT-183WP12	12V	1.5A	
CT-183WP15	15V	1.2A	
CT-183WP18	18V	1.0A	
CT-183WP20	20V	0.9A	
CT-183WP24	24V	0.75A	

Specification:

REV.03 2010.2.11



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	600mA
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Conversing)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY

AC-DC 18W





CT-186DAXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,FCC,GS,CB,CE PSE standard
- Meet EPS 2.0 LEVEL V



Dimension:



Model No.	Output		Additional Safety
CT-186DA05	5V	3.6A	
CT-186DA05A	5V	3A	
CT-186DA06	6V	3A	
CT-186DA12	12V	1.5A	
CT-186DA15	15V	1.2A	

Specification:

REV.01 2009.10.05



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	500mA
	Leakage Current	< 0.25mA
Others	Start up time	<3000mS @ Minimum AC input
	Rise time	<100mS
	Hold up time	>20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4





CET TECHNOLOGY, LLC

18W - Switching Power Supplies

ADAPTER POWER SUPPLY

AC-DC 18W




CT-186DBXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,FCC,GS,CB,CE PSE,RCM standard
- Meet EPS 2.0 LEVEL V



Dimension:



Model No.	Output		Additional Safety
CT-186DB05	5V	3.6A	
CT-186DB05A	5V	3A	
CT-186DB06	6V	3A	
CT-186DB12	12V	1.5A	
CT-186DB15	15V	1.2A	

Specification:

REV.02 2010.06.18



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	500mA
	Leakage Current	< 3.5mA
Others	Start up time	<3000mS @ Minimum AC input
	Rise time	<100mS
	Hold up time	>20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1, CSA C22.2 No.60950-1, EN60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15, EN55022, EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4





CET TECHNOLOGY, LLC

18W - Switching Power Supplies

ADAPTER POWER SUPPLY

AC-DC 18W





CT-186DNXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,FCC,GS,CB,CE PSE,RCM standard
- Meet EPS 2.0 LEVEL V



Dimension:



Model No.	Output		Additional Safety
CT-186DN05	5V	3.6A	
CT-186DN05A	5V	3A	
CT-186DN06	6V	3A	
CT-186DN12	12V	1.5A	
CT-186DN15	15V	1.2A	

Specification:

REV.02 2010.06.18



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	500mA
	Leakage Current	<3.5mA
Others	Start up time	<3000mS @ Minimum AC input
	Rise time	<100mS
	Hold up time	>20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Conversing)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4

