

2SC4245


TV TUNER, UHF MIXER APPLICATIONS

VHF~UHF BAND RF AMPLIFIER APPLICATIONS

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CB0}	30	V
Collector-Emitter Voltage	V_{CE0}	15	V
Emitter-Base Voltage	V_{EB0}	3	V
Collector Current	I_C	50	mA
Base Current	I_B	25	mA
Collector Power Dissipation	P_C	100	mW
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55~125	$^\circ\text{C}$

Marking




Unit in mm

1. BASE	
2. EMITTER	
3. COLLECTOR	
JEDEC	—
EIAJ	SC-70
TOSHIBA	2-2E1A

Weight : 0.006g







ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB} = 30\text{V}$, $I_E = 0$	—	—	0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = 2\text{V}$, $I_C = 0$	—	—	1.0	μA
Collector Emitter Breakdown Voltage	$V_{(BR)CE0}$	$I_C = 1\text{mA}$, $I_B = 0$	15	—	—	V
DC Current Gain	h_{FE}	$V_{CE} = 10\text{V}$, $I_C = 5\text{mA}$	40	100	200	—
Reverse Transfer Capacitance	C_{re}	$V_{CB} = 10\text{V}$, $I_E = 0$, $f = 1\text{MHz}$	—	0.6	0.9	pF
Transition Frequency	f_T	$V_{CE} = 10\text{V}$, $I_C = 2\text{mA}$	1500	2400	—	MHz
Conversion Gain	G_{ce}	$V_{CC} = 10\text{V}$, $I_C = 2\text{mA}$, $f = 800\text{MHz}$	12	17	—	dB
Noise Figure	NF	$f_L = 830\text{MHz}$ (+2dBm) (Fig.1)	—	8	13	dB

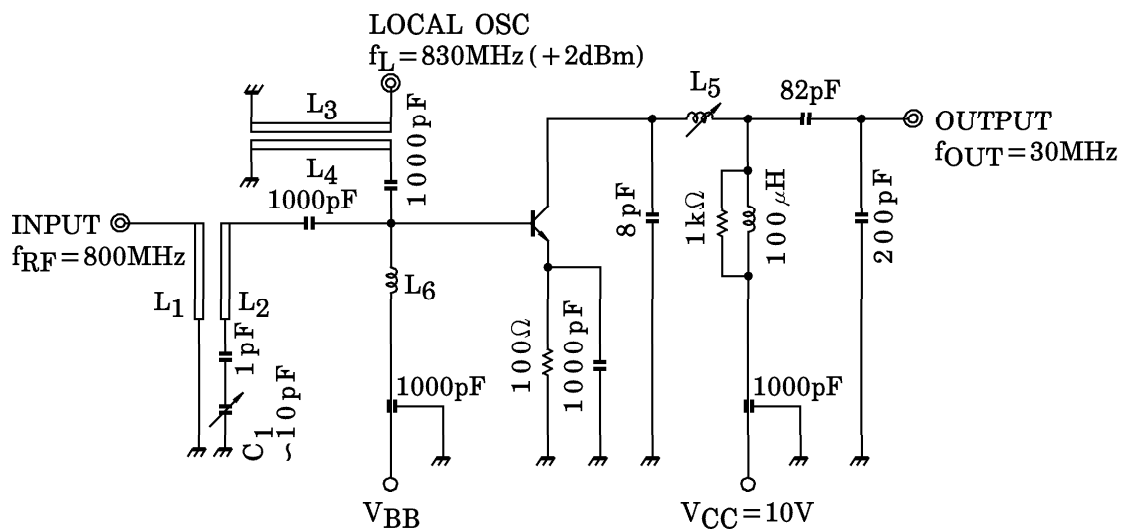


- $L_1 \sim L_4$: $\phi 0.8\text{mm}$ SILVER PLATED COPPER WIRE
 L_5 : COIL WITH CORE SCN-5948①-③ TOKO OR EQUIVALENT
 L_6 : $\phi 0.2\text{mm}$ COPPER WIRE 10T 5mm I_D
 C_1 : AIR TRIMMER TTA23A100 MURATA MFC. Co., LTD. OR EQUIVALENT


Fig.1 800MHz G_{ce} , NF TEST CIRCUIT

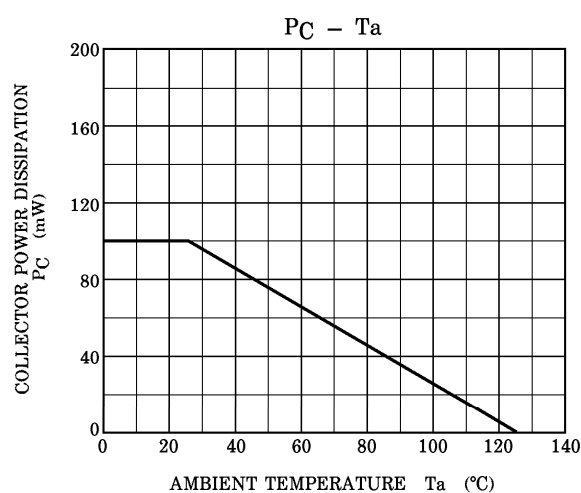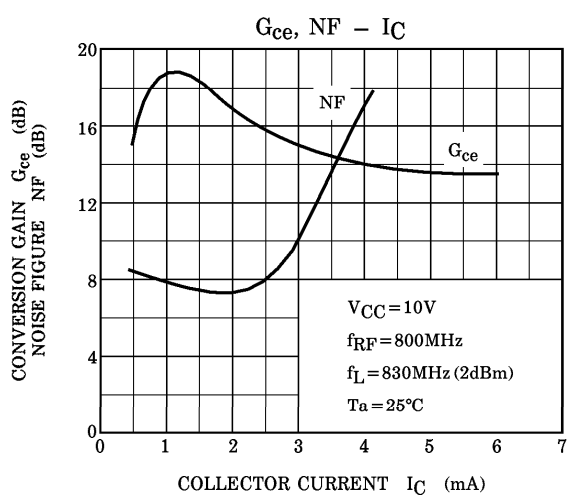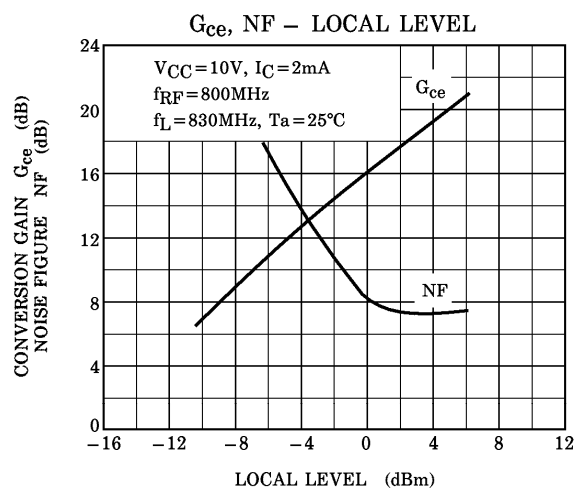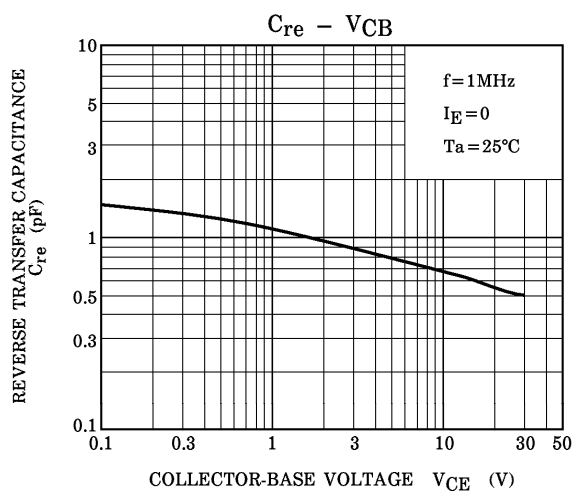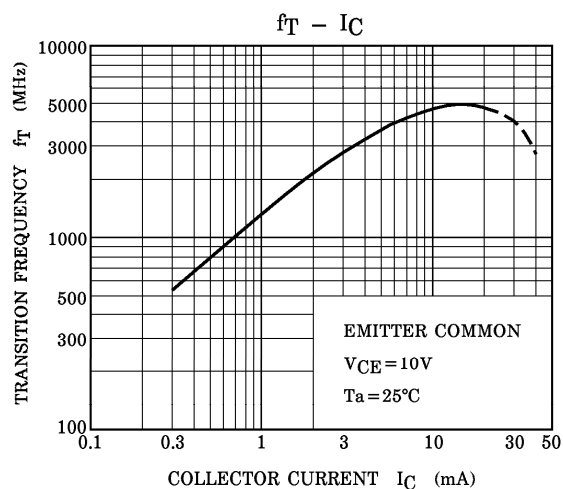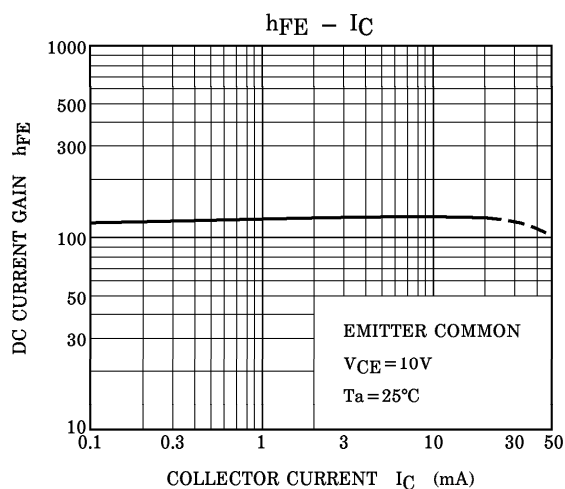


S_{11e}
V_{CE} = 10V
I_C = 2mA
T_a = 25°C
(UNIT : Ω)

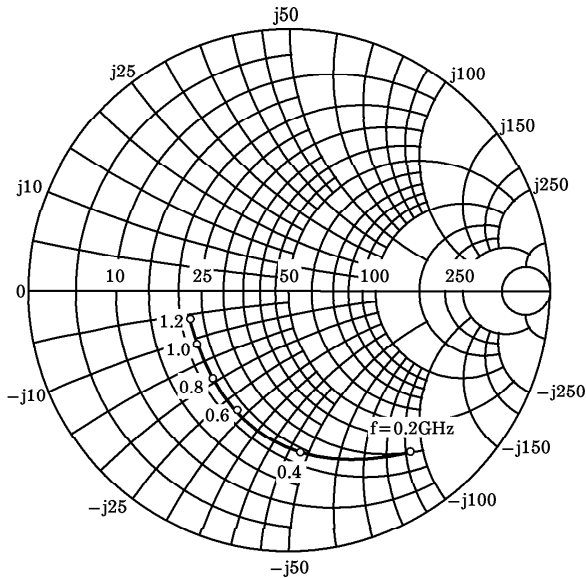


S_{12e}
V_{CE} = 10V
I_C = 2mA
T_a = 25°C

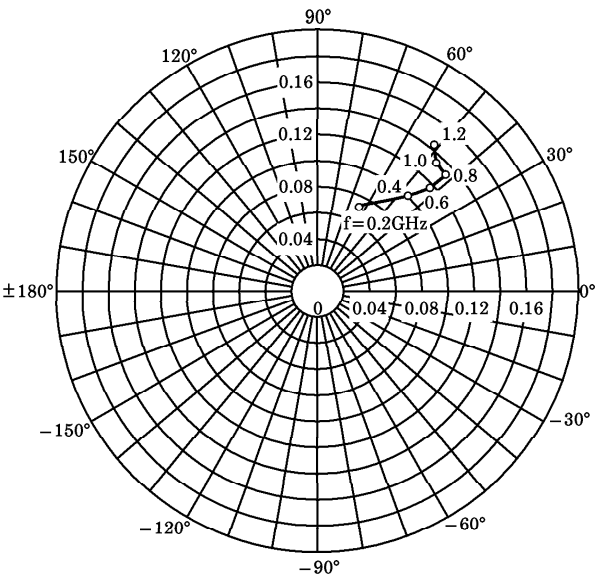

S_{21e}
V_{CE} = 10V
I_C = 2mA
T_a = 25°C

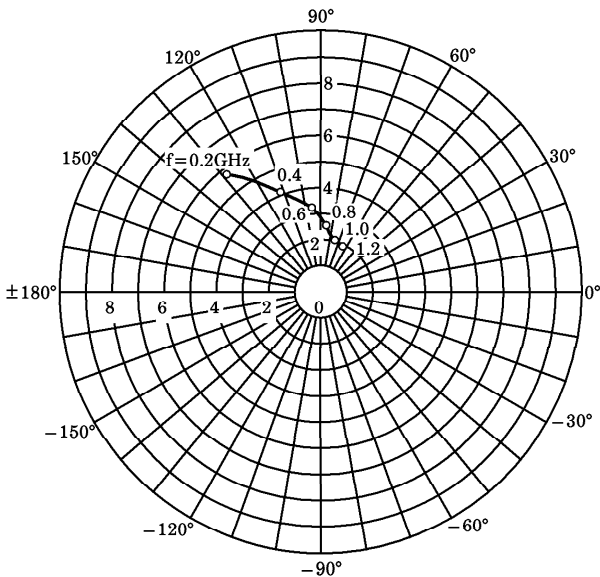

S_{22e}
V_{CE} = 10V
I_C = 2mA
T_a = 25°C
(UNIT : Ω)

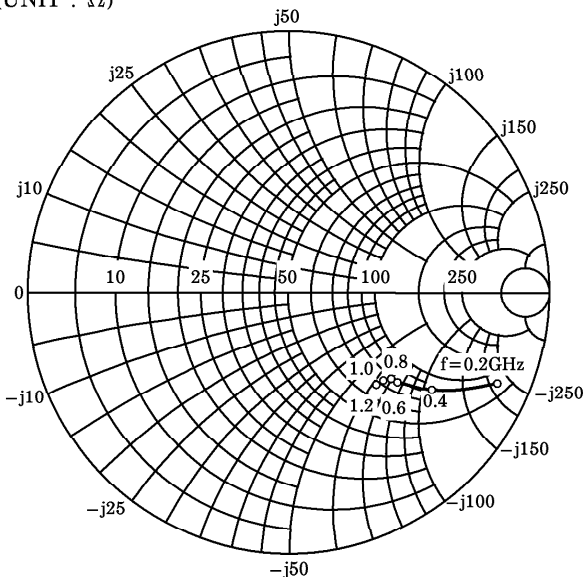

RESTRICTIONS ON PRODUCT USE

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.