



ADAPTER POWER SUPPLY

AC-DC 120W


CT-1C2DBxx

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CB,CE,FCC standard



Dimension:

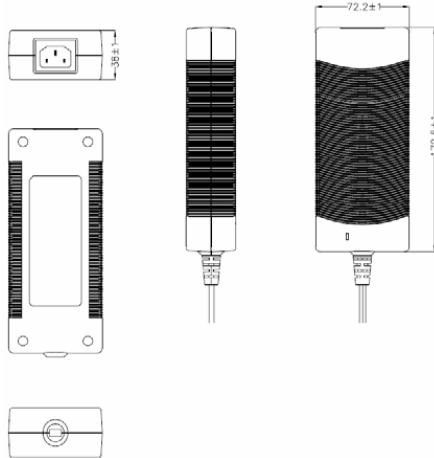

Model No.	Output	Additional Safety
CT-1C2DB12	12V 8.33A	
CT-1C2DB15	15V 8.0A	
CT-1C2DB18	18V 6.66A	
CT-1C2DB19	19V 6.31A	
CT-1C2DB24	24V 5.0A	
CT-1C2DB48	48V 2.5A	

Specification:

REV.01 2009.9.2



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	1.8A MAX
	Leakage Current	< 3.5mA
Others	Start up time	<5000mS @ Minimum AC input
	Rise time	<100mS
	Hold up time	>10mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C ;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Conversing)
M.T.B.F	50k Hours	
Safety	UL 60950-1/60065,CSA C22.2 No.60950-1/60065,EN60950-1/60065,IEC 60950-1/60065	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4





ADAPTER POWER SUPPLY

AC-DC 120W


CT-1C2DNxx

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CB,CE,FCC standard



Dimension:

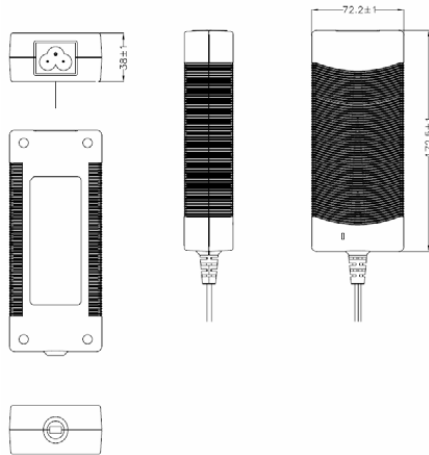

Model No.	Output		Additional Safety
CT-1C2DN12	12V	8.33A	
CT-1C2DN15	15V	8.0A	
CT-1C2DN18	18V	6.66A	
CT-1C2DN19	19V	6.31A	
CT-1C2DN24	24V	5.0A	
CT-1C2DN48	48V	2.5A	

Specification:

REV.01 2009.9.2



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	1.8A MAX
	Leakage Current	< 3.5mA
Others	Start up time	<5000mS @ Minimum AC input
	Rise time	<100mS
	Hold up time	>10mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1/60065,CSA C22.2 No.60950-1/60065,EN60950-1/60065,IEC 60950-1/60065	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4





ADAPTER POWER SUPPLY

AC-DC 120W


CT-1F3DBXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CE,FCC standard
- Meet EPS 2.0 LEVEL V



Dimension:



Model No.	Output		Additional Safety
CT-1F3DB12	12V	10A/8.33A	
CT-1F3DB15	15V	8A	
CT-1F3DB16	16V	7.5A	
CT-1F3DB18	18V	6.66A	
CT-1F3DB19	19V	6.31A	

Specification:

REV.01 2011.3.2



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	2.0A MAX
	Leakage Current	< 3.5mA
Others	Start up time	<3000mS @ Minimum AC input
	Rise time	<50mS
	Hold up time	>10mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1/EN60950-1/IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4





ADAPTER POWER SUPPLY

AC-DC 120W


CT-1F3DNXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CB,CE,FCC standard
- Meet EPS 2.0 LEVEL V



Dimension:



Model No.	Output		Additional Safety
CT-1F3DN12	12V	10A/8.33A	
CT-1F3DN15	15V	8A	
CT-1F3DN16	16V	7.5A	
CT-1F3DN18	18V	6.66A	
CT-1F3DN19	19V	6.31A	

Specification:

REV.01 2011.3.2



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	2.0A MAX
	Leakage Current	< 3.5mA
Others	Start up time	<3000mS @ Minimum AC input
	Rise time	<50mS
	Hold up time	>10mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1/EN60950-1/IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4

