



ADAPTER POWER SUPPLY

AC-DC 60-65W


CT-602DAxx

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CB,CE,FCC standard
- Meet EPS 2.0 LEVEL V



Dimension:

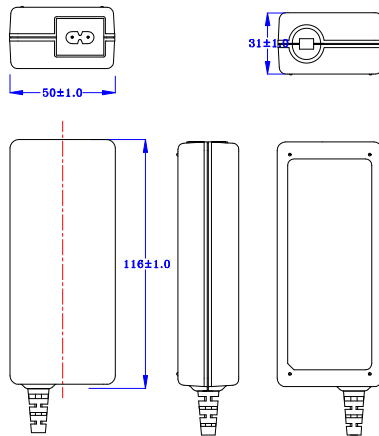

Model No.	Output		Additional Safety
CT-602DA12	12V	5A	
CT-602DA19	19V	3.42A	PSE
CT-602DA24	24V	2.7A	PSE
CT-602DA48	48V	1.25A	

Specification:



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	1.5A
	Leakage Current	< 0.25mA
	Start up time	< 2000mS @ Minimum AC input
Others	Rise time	< 30mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%
M.T.B.F	50k Hours	
Safety	UL 60950-1/CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4





ADAPTER POWER SUPPLY

AC-DC 60W


CT-603DBxx

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CB,CE,FCC,PSE,RCM
CCC,GOST,BSMI standard
- Meet EPS 2.0 LEVEL V



Dimension:

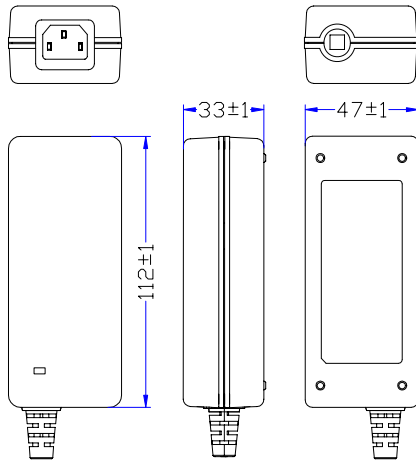

Model No.	Output		Additional Safety
CT-603DB12	12V	5A	KC
CT-603DB19	19V	3.42A	
CT-603DB24	24V	2.7A	

Specification:

REV.07 2011.08.23



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	1.5A
	Leakage Current	< 3.5mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non condensing)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	Emission	FCC PART 15 , Subpart B, Class B EN55022 , EN61000-3
	Immunity	EN55024(EN61204-3) EN61000-4





ADAPTER POWER SUPPLY

AC-DC 60W


CT-603DBxx

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CB,CE,FCC,PSE,RCM
CCC,GOST,BSMI standard
- Meet EPS 2.0 LEVEL V



Dimension:

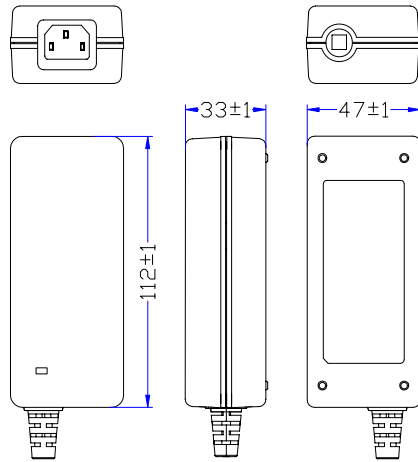

Model No.	Output		Additional Safety
CT-603DB12	12V	5A	KC
CT-603DB19	19V	3.42A	
CT-603DB24	24V	2.7A	

Specification:

REV.07 2011.08.23



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	1.5A
	Leakage Current	< 3.5mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non condensing)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	Emission	FCC PART 15 , Subpart B, Class B EN55022 , EN61000-3
	Immunity	EN55024(EN61204-3) EN61000-4

