

ADAPTER POWER SUPPLY

AC-DC 50W


CT-505DAxx

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CB,CE,FCC standard
- Meet EPS 2.0 LEVEL V



Dimension:

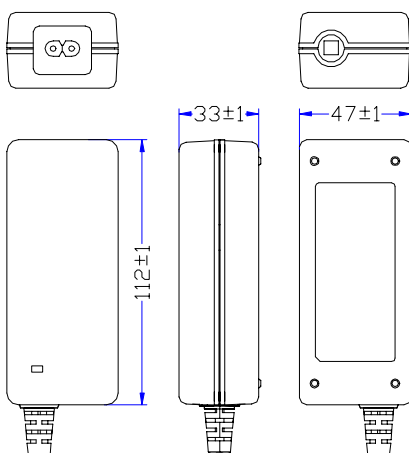

Model No.	Output		Additional Safety
CT-505DA05	5 V	6.5 A	
CT-505DA06	5.95 V	6 A	
CT-505DA09A	9 V	4 A	
CT-505DA09	9 V	5 A	
CT-505DA12	12 V	4.2 A	
CT-505DA15	15 V	3.34 A	
CT-505DA19	19 V	2.64 A	
CT-505DA24	24 V	2.08 A	

Specification:

REV.01 2011.8.12



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	1.2A
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+75℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non condensing)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	Emission	FCC PART 15, Subpart B, Class B EN55022, EN61000-3
	Immunity	EN55024(EN61204-3) EN61000-4



ADAPTER POWER SUPPLY

AC-DC 50W


CT-505DNxx

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CB,CE,FCC standard
- Meet EPS 2.0 LEVEL V



Dimension:

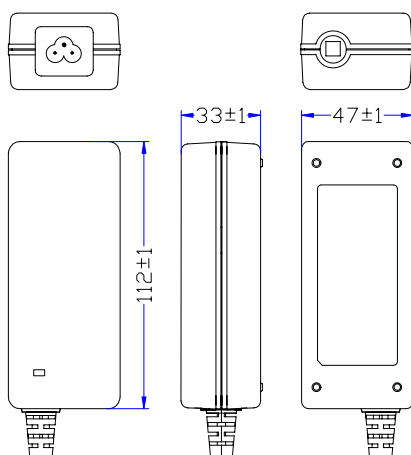

Model No.	Output		Additional Safety
CT-505DN05	5 V	6.5 A	
CT-505DN06	5.95 V	6 A	
CT-505DN09A	9 V	4 A	
CT-505DN09	9 V	5 A	
CT-505DN12	12 V	4.2 A	
CT-505DN15	15 V	3.34 A	
CT-505DN19	19 V	2.64 A	
CT-505DN24	24 V	2.08 A	

Specification:

REV.01 2011.8.12



Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	1.2A
	Leakage Current	< 3.5mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non condensing)
M.T.B.F		50k Hours
Safety		UL 60950-1,CSA C22.2 No.60950-1,IEC 60950-1
EMC	Emission	FCC PART 15, Subpart B, Class B EN55022, EN61000-3
	Immunity	EN55024(EN61204-3) EN61000-4

