



## FT 7951


Avery Dennison FT 7951 is an emulsion based scrim reinforced modified acrylic double coated nonwoven tape used for bonding polyurethane foam, polyester fibers, felts and fabrics to a wide variety of substrates. High adhesion to medium and low surface energy materials such as PP, PE, TPO, ABS, PVC, polystyrene and painted metals. Ideal for general purpose foam bonding applications such as gaskets, sound deadening and insulation materials in automotive, building and construction, appliance assembly and general industrial sub-assembly.

### FEATURES:

- Emulsion engineered adhesive
- APEO free adhesive
- Controlled adhesive thickness
- High initial tack
- Easy release glassine liner
- Broad range of service temperatures

### BENEFITS:

- Consistent application performance
- Excellent resistance to solvents, chemicals, plasticizers, moisture, temperature and UV light
- Good conformability to flat or curved surfaces
- Immediate initial adhesion for part placement
- Allows for water jet and die cutting
- Environmentally responsible adhesive

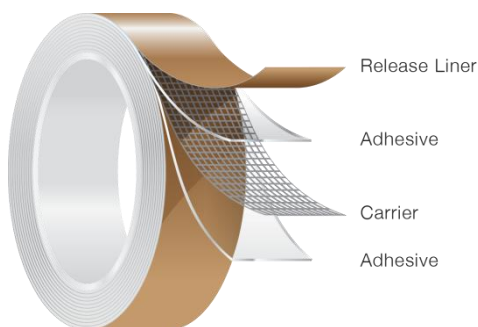

### CONSTRUCTION:

#### Liner:

Havana (yellow/brown) colored glassine

#### Adhesive:

Emulsion based modified acrylic

#### Carrier:

Polyester scrim

**FT 7951**

Physical Properties		Typical Values
THICKNESS		
Adhesive + Carrier	93 microns – 3.66 US mills	
Liner	69 microns – 2.72 US mills	
Total	162 microns – 6.38 US mills	
* ATM 7		
ADHESION 180° peel	20 mins	24 hrs
Stainless Steel	1190 N/m – 6.80 lbf/inch	1320 N/m – 7.54 lbf/inch
Painted Steel	1080 N/m – 6.17 lbf/inch	1130 N/m – 6.45 lbf/inch
Polycarbonate	1080 N/m – 6.17 lbf/inch	1130 N/m – 6.45 lbf/inch
Rigid Polypropylene	950 N/m – 5.43 lbf/inch	1000 N/m – 5.71 lbf/inch
*ATM 1		
TACK (finat)		
Glass	1090 N/m – 6.22 lbf/inch	
* ATM 8		
SHEAR RESISTANCE		
Static – 1000g/25mmx25mm	2,500 mins	
* ATM 2		
TEMPERATURES		
Application (minimum)	+10°C/ 50°F	
Service (continuous)	-40°C up to +140°C/ -40°F up to 284°F	
Short term	+150°C/ 302°F	
* ASTM D3654		
* TEST METHODS		

Note: The listed values are typical only and not intended to serve as product specifications

**APPLICATION TECHNIQUES**

- It is essential with all pressure-sensitive tapes the application surface is clean, dry and free of grease and oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (firm / rigid) surface achieves different performance

**STORAGE AND SHELF LIFE**

The shelf life of the product is one year when stored at 18-22°C / 64-72°F, 30-70% relative humidity and out of direct sunlight, in original packaging.

Please refer to **Tapes.AveryDennison.com** for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2014 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance  
Tapes

**Asia Pacific**  
Kunshan, China,  
NO. 618 Nanhe Road  
Kunshan Economic &  
Technological Zone  
China, 215335  
Phone: +86 512 57155001  
Fax: +86 512 57155059

**Europe**  
Tieblokkenlaan 1  
B-2300 Turnhout  
Belgium  
Phone: +32 (0)14 40 48 11  
Fax: +32 (0)14 40 48 55

**South America**  
Rua Francisco Foga, 225  
13280-000 Vinhedo  
SP Brazil  
Phone: +55 19 3876 7736  
Fax: +55 19 3876 7682

**North America**  
250 Chester Street  
Painesville, Ohio  
44077 USA  
Phone: +1 866-462-8379  
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions, visit **Tapes.AveryDennison.com**