



- High Sensitivity
- Low Noise (<5 mV rms)
- Rail-to-Rail Output
- High Power-Supply Rejection (>20 dB)
- Single Voltage Supply Operation
- Monolithic Silicon IC Containing Photodiode, Operational Amplifier, and Feedback Components
- Converts Light Intensity to Output Voltage
- Compact 3-Leaded Plastic Package
- Wide Supply-Voltage Range
- Low Supply Current

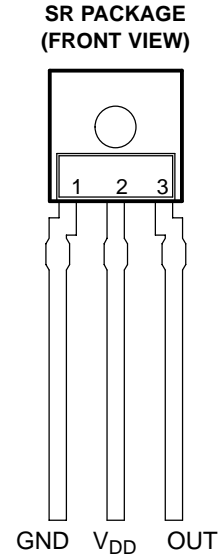

Description

The TSL255 is a high-sensitivity low-noise light-to-voltage optical converter that combines a photodiode and a transimpedance amplifier on a single monolithic CMOS integrated circuit. Output voltage is directly proportional to light intensity (irradiance) on the photodiode. The TSL255 has a transimpedance gain of 3.2 GΩ. The device uses CMOS technology, which provides improved offset voltage stability and low power consumption, and is supplied in a 3-lead clear plastic sidelooper package with an integral lens.

Functional Block Diagram

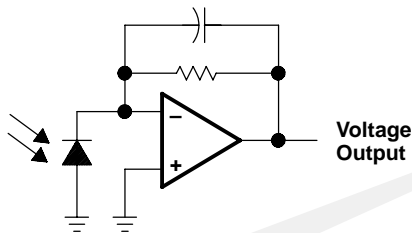

Terminal Functions

TERMINAL NAME	NO.	DESCRIPTION
GND	1	Ground (substrate). All voltages are referenced to GND.
OUT	3	Output voltage
V _{DD}	2	Supply voltage

TSL255 HIGH-SENSITIVITY NEAR-INFRARED

TAOS015 – OCTOBER 1999

Absolute Maximum Ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, V_{DD} (see Note 1)	7 V
Output current, I_O	± 10 mA
Duration of short-circuit current at (or below) 25°C	5 s
Operating free-air temperature range, T_A	-25°C to 85°C
Storage temperature range, T_{stg}	-25°C to 85°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	240°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltages are with respect to GND.

Recommended Operating Conditions

	MIN	MAX	UNIT
Supply voltage, V_{DD}	2.7	6	V
Operating free-air temperature, T_A	0	70	°C

Electrical Characteristics at $V_{DD} = 5$ V, $T_A = 25^\circ\text{C}$, $\lambda_p = 880$ nm, $R_L = 10$ k Ω (unless otherwise noted) (see Notes 2 and 3)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_D Dark voltage	$E_e = 0$			100	mV
V_{OM} Maximum output voltage swing	$V_{DD} = 4.5$ V, $R_L = 0$,		4.49		V
	$V_{DD} = 4.5$ V, $R_L = 10$ k Ω	4	4.2		
V_O Output voltage	$E_e = 156$ mW/cm ²	1.6	2	2.4	V
α_{V_O} Temperature coefficient of output voltage (V_O)	$T_A = 0^\circ\text{C}$ to 70°C , See Note 2		TBD		%/°C
N_e Irradiance responsivity			12.8		V/($\mu\text{W}/\text{cm}^2$)
Power supply rejection	$f_{ac} = 100$ Hz, $1.3 V_{O(pp)}$		32		dB
	$f_{ac} = 1$ kHz, $1.3 V_{O(pp)}$		19		
I_{DD} Supply current			2.5	4.5	mA

NOTES: 2. The input irradiance E_e is supplied by a GaAlAs infrared-emitting diode with $\lambda_p = 880$ nm.

3. Irradiance responsivity is characterized over the range $V_O = 0.1$ V to 4.5 V.

Switching Characteristics at $V_{DD} = 5$ V, $T_A = 25^\circ\text{C}$, $\lambda_p = 880$ nm, $R_L = 10$ k Ω (unless otherwise noted) (see Note 7)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_r Output pulse rise time	See Notes 4 and 5		166	250	μs
t_f Output pulse fall time	See Notes 4 and 5		163	250	μs
t_s Output settling time			322		μs
Integrated noise voltage	$f = \text{dc}$ to 1 kHz		3.5		mV RMS
V_n Output noise voltage, rms	$f = 10$ Hz, See Note 6		92		$\mu\text{V}/\sqrt{\text{Hz}}$ RMS
	$f = 100$ Hz		86		
	$f = 1$ Hz		104		

NOTES: 4. Measured with $R_L = 10$ k Ω between output and ground.

5. The output waveform is monitored on an oscilloscope with $Z_i = 1$ M Ω , $C_i < 20$ pF.


6. Measured with external 1-kHz RC filter (10 k Ω /15.9 nF).

7. Irradiance responsivity is characterized over the range $V_O = 0.1$ V to 4.5 V.

www.taosinc.com



PARAMETER MEASUREMENT INFORMATION

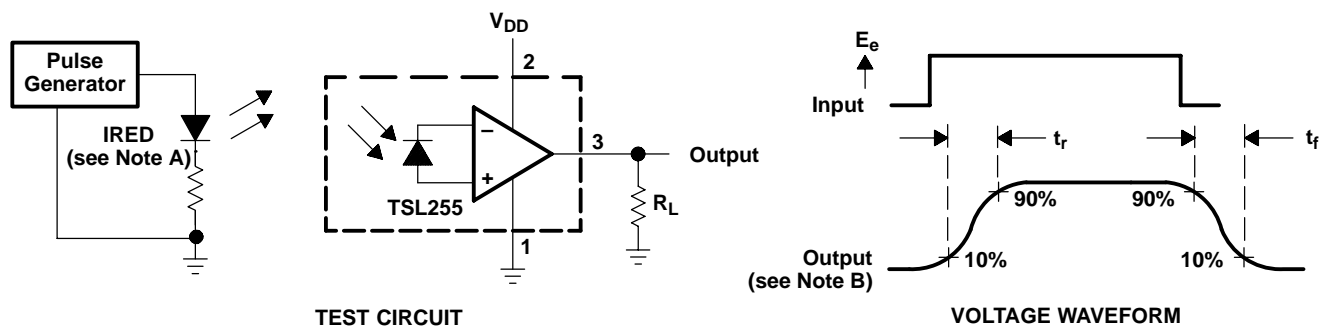

- NOTES: A. The input irradiance is supplied by a pulsed GaAlAs infrared-emitting diode with the following characteristics: $\lambda_p = 880 \text{ nm}$, $t_r < 1 \mu\text{s}$, $t_f < 1 \mu\text{s}$.
- B. The output waveform is monitored on an oscilloscope with the following characteristics: $t_r < 100 \text{ ns}$, $Z_i \geq 1 \text{ MHz}$, $C_i \leq 20 \text{ pF}$.

Figure 1. Switching Times

TYPICAL CHARACTERISTICS

**OUTPUT VOLTAGE
 vs
 IRRADIANCE**

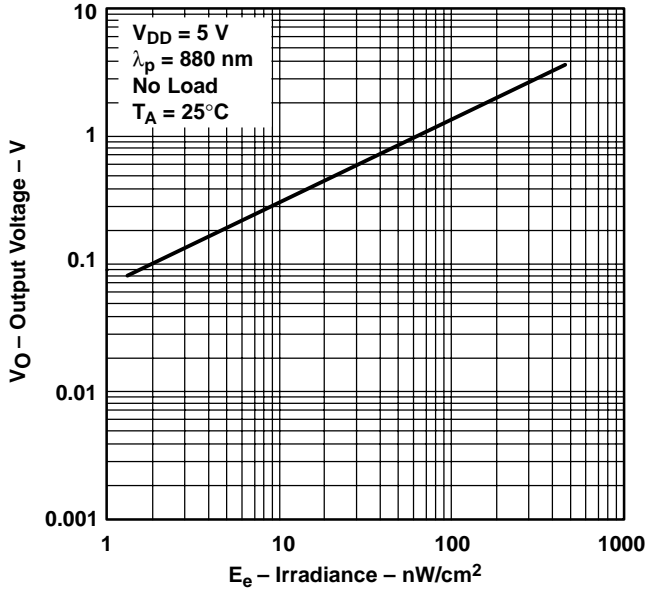


Figure 2

PHOTODIODE SPECTRAL RESPONSIVITY

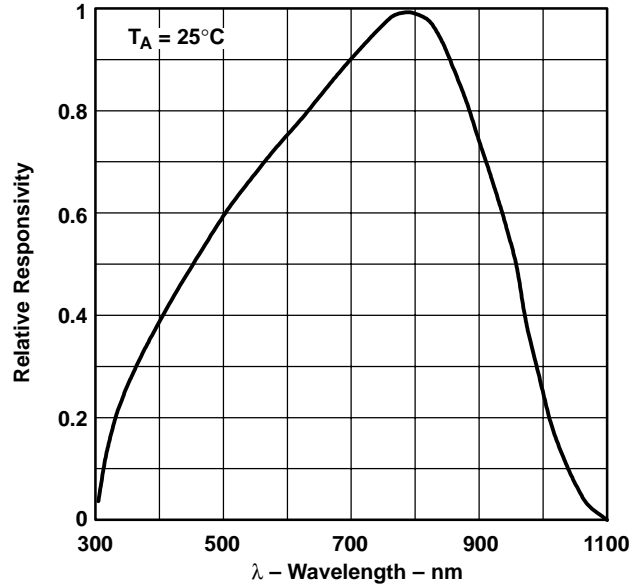


Figure 3

**MAXIMUM OUTPUT VOLTAGE
 vs
 SUPPLY VOLTAGE**

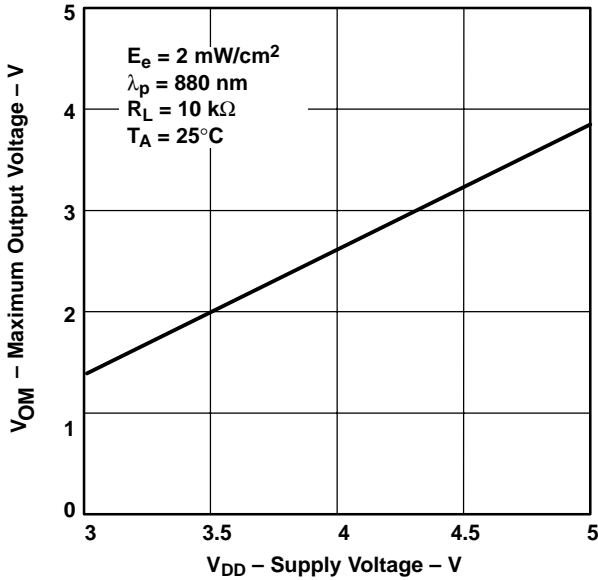


Figure 4

**NORMALIZED OUTPUT VOLTAGE
 vs
 ANGULAR DISPLACEMENT**

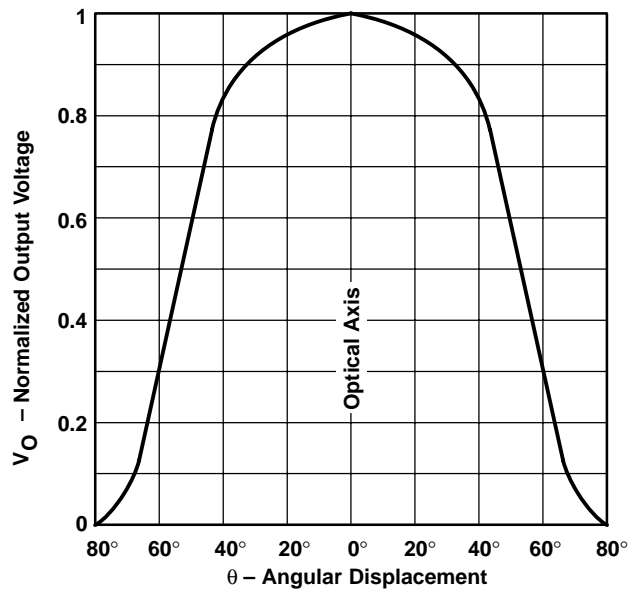


Figure 5

TYPICAL CHARACTERISTICS

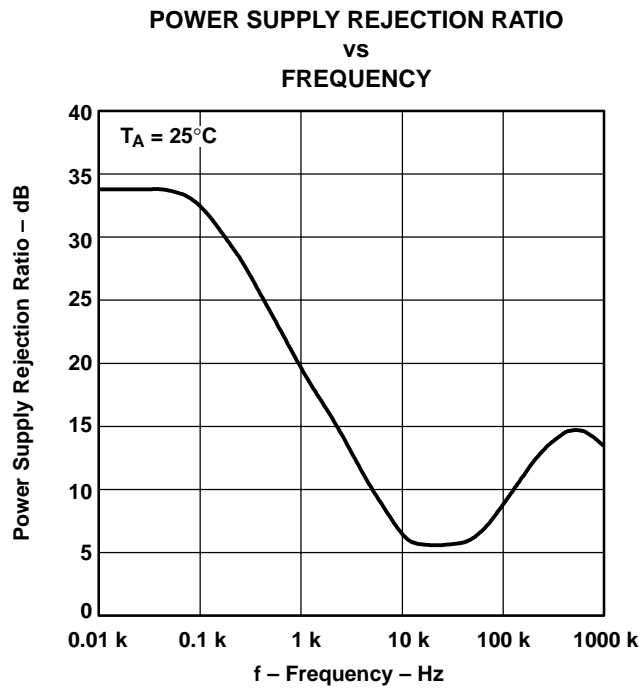


Figure 6

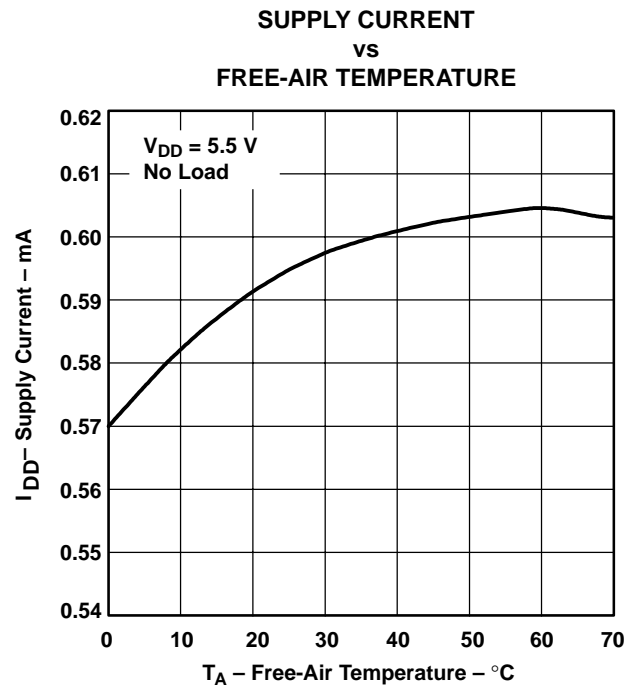


Figure 7

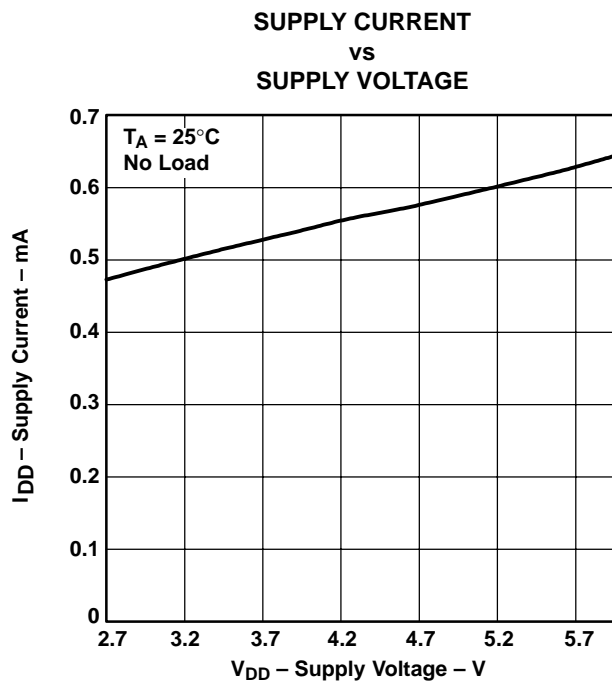


Figure 8

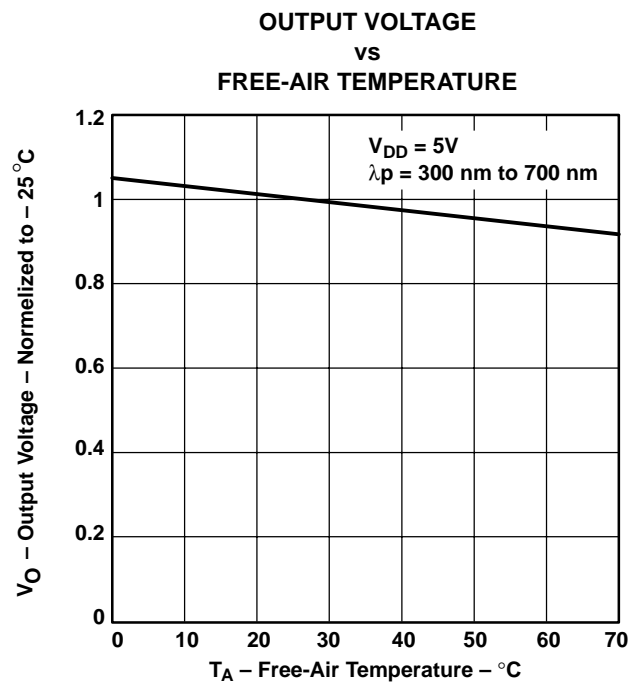


Figure 9

TYPICAL CHARACTERISTICS

**OUTPUT VOLTAGE
 VS
 SUPPLY VOLTAGE**

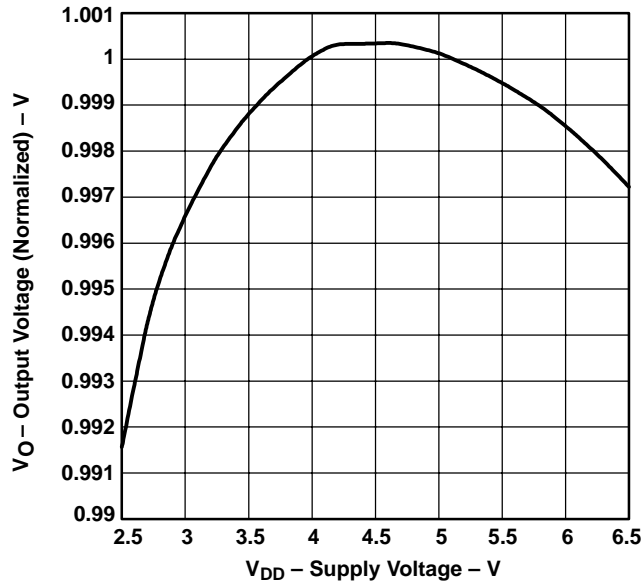


Figure 10

**INTEGRATED NOISE VOLTAGE
 VS
 MEASUREMENT BANDWIDTH FREQUENCY**

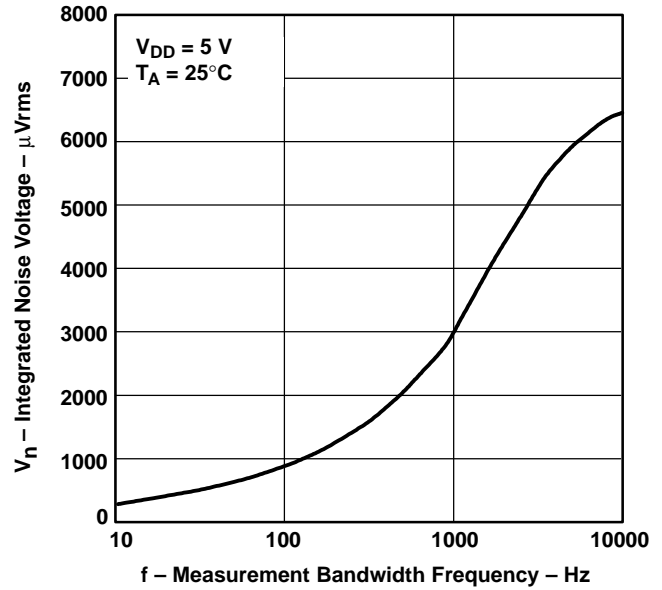


Figure 11

MECHANICAL DATA

The TSL255 is supplied in a clear 3-leaded package with a large molded focusing lens.

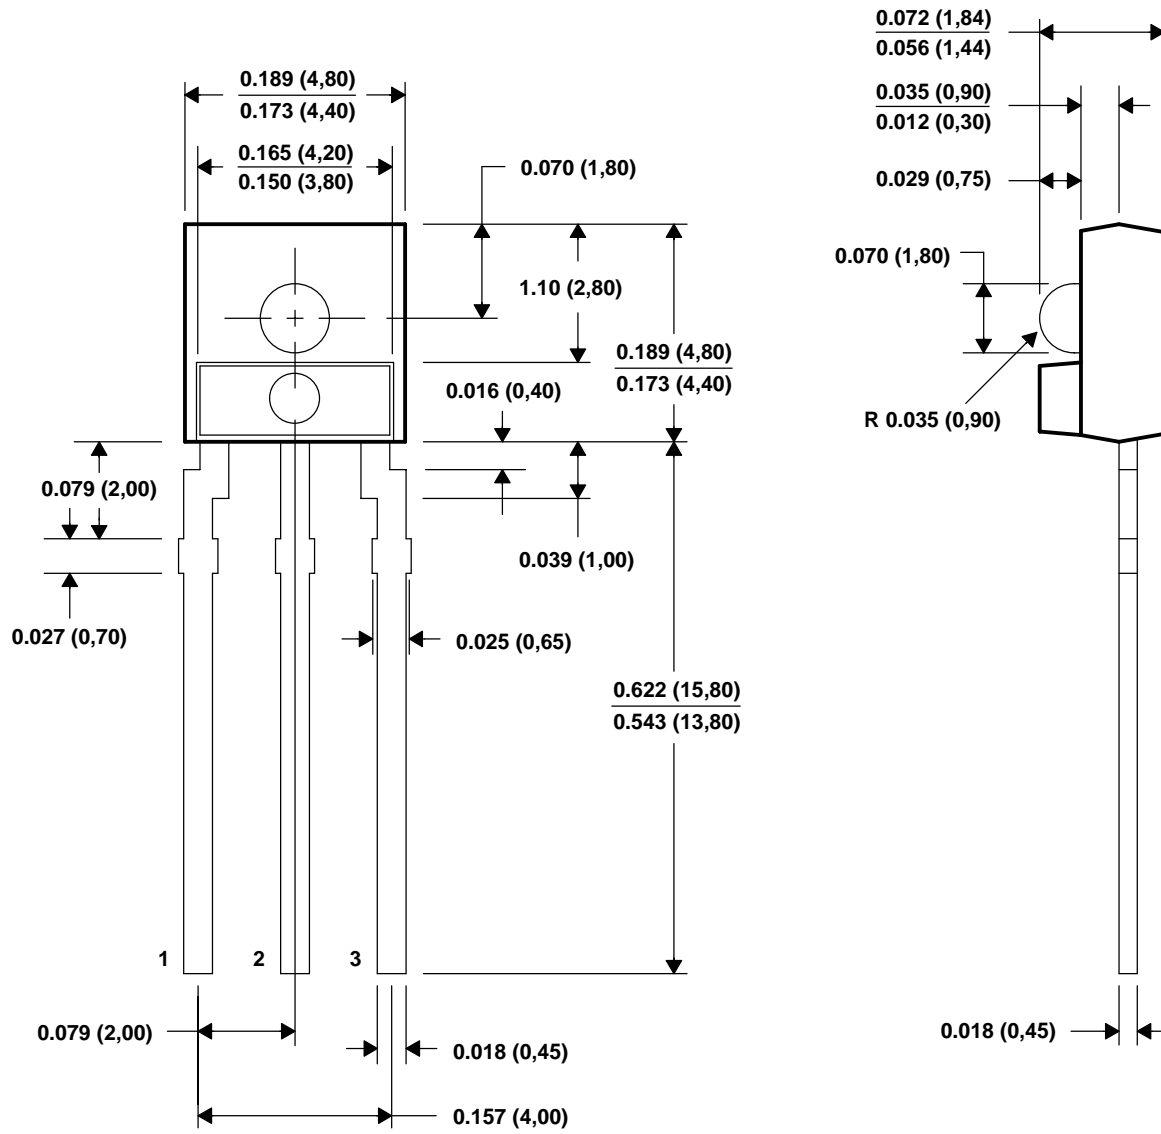


Figure 12. Package Configuration

- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. All dimensions apply before solder dip.
 - D. Package body is a clear nonfilled optically transparent material
 - E. Index of refraction of clear plastic is 1.55.

TSL255 HIGH-SENSITIVITY NEAR-INFRARED

TAOS015 – OCTOBER 1999

PRODUCTION DATA — information in this document is current at publication date. Products conform to specifications in accordance with the terms of Texas Advanced Optoelectronic Solutions, Inc. standard warranty. Production processing does not necessarily include testing of all parameters.

NOTICE

Texas Advanced Optoelectronic Solutions, Inc. (TAOS) reserves the right to make changes to the products contained in this document to improve performance or for any other purpose, or to discontinue them without notice. Customers are advised to contact TAOS to obtain the latest product information before placing orders or designing TAOS products into systems.

TAOS assumes no responsibility for the use of any products or circuits described in this document or customer product design, conveys no license, either expressed or implied, under any patent or other right, and makes no representation that the circuits are free of patent infringement. TAOS further makes no claim as to the suitability of its products for any particular purpose, nor does TAOS assume any liability arising out of the use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages.

TEXAS ADVANCED OPTOELECTRONIC SOLUTIONS, INC. PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN CRITICAL APPLICATIONS IN WHICH THE FAILURE OR MALFUNCTION OF THE TAOS PRODUCT MAY RESULT IN PERSONAL INJURY OR DEATH. USE OF TAOS PRODUCTS IN LIFE SUPPORT SYSTEMS IS EXPRESSLY UNAUTHORIZED AND ANY SUCH USE BY A CUSTOMER IS COMPLETELY AT THE CUSTOMER'S RISK.