


T B 1 0 2 2 F

CR TIMER


FEATURES

- MOS IC with 22-stage binary counter.
- Built-in initialize circuit.
- Built-in voltage detection comparator.
- Wide range timer setting.
- Low power dissipation current.
- Suitable for Ni-cd battery charger.

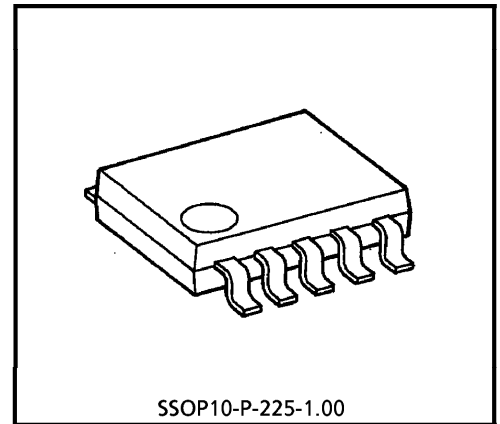

Weight : 0.1g (Typ.)


BLOCK DIAGRAM

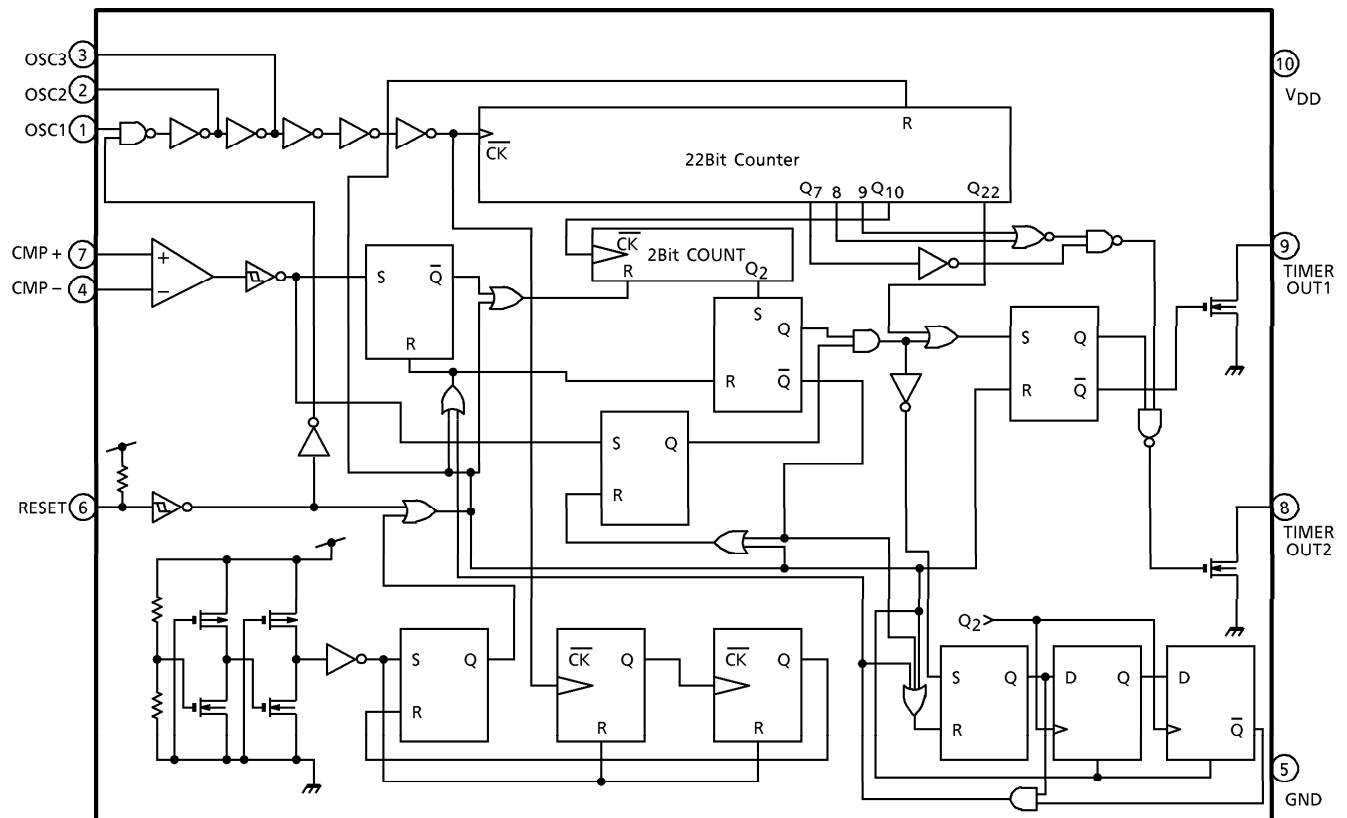

FUNCTION DESCRIPTION ON EACH TERMINAL

PIN No.	SYMBOL	FUNCTION
1	OSC1	Oscillation input terminal 1
2	OSC2	Oscillation input terminal 2
3	OSC3	Oscillation input terminal 3
4	CMP ⁻	Comparator minus (-) side input terminal "L" : Timer mode, "H" : Timer over voltage detection mode
5	GND	GND
6	RESET	Reset terminal (H→L : inside reset)
7	CMP ⁺	Comparator plus (+) side input terminal "H" : Timer mode, "L" : Timer over voltage detection mode
8	TIMER OUT2	Timer output terminal 2 (N-ch open drain, sink max. 5mA)
9	TIMER OUT1	Timer output terminal 1 (N-ch open drain, sink max. 5mA)
10	V _{DD}	System power supply

PIN CONNECTION

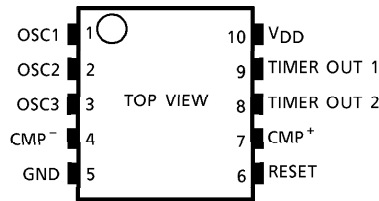


TRUTH TABLE

MODE	INPUT			OUTPUT
	RESET	CMP ⁺	CMP ⁻	
1	L	(*)	(*)	L
2	H	H	L	Timer Mode
3	H	L	H	Timer over voltage detecting Mode

(*) : H or L

Turning the power supply on, "Power on Reset" is operated and output level is "L".

TIMING CHART

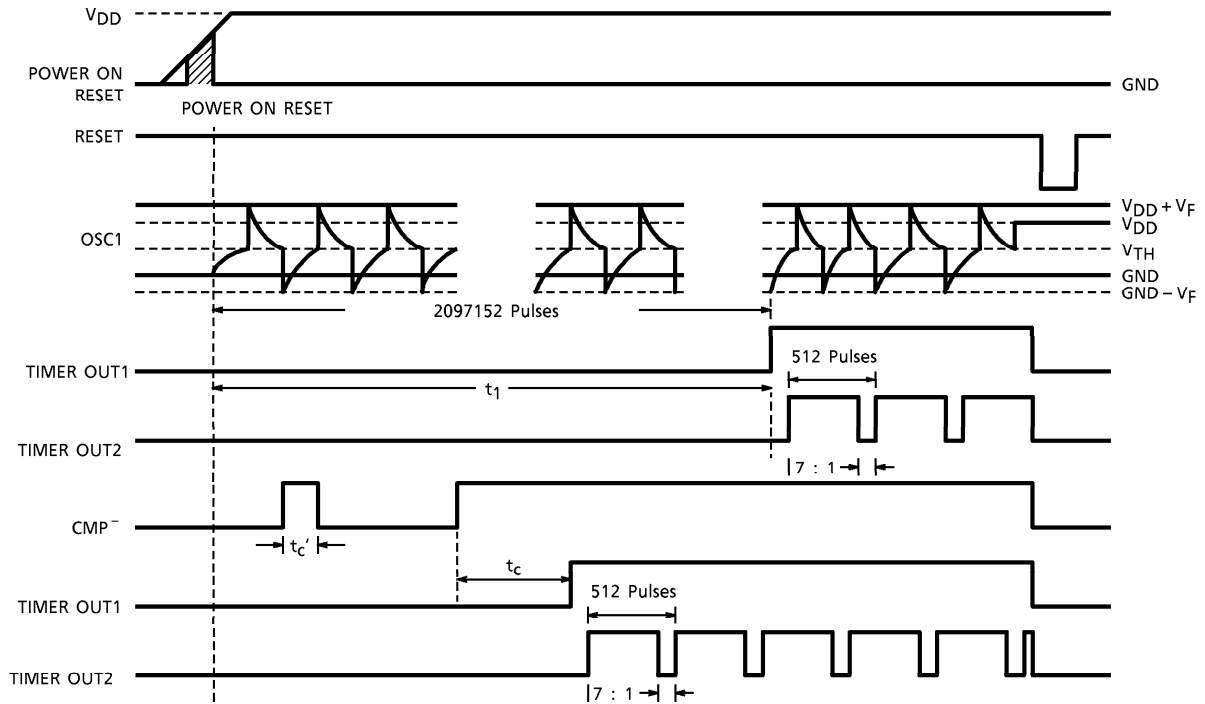

(*) : $t_c' < t_c$ at CMP⁻ input "H" Level cancelled

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Power Supply Voltage	V _{DD}	- 0.3~7.0	V
Power Dissipation	P _D	250~300	mW
Operating Temperature	T _{opr}	- 20~75	°C
Storage Temperature	T _{stg}	- 55~125	°C
Electrostatic Discharge	ESD (*)	± 200	V
Latch Up Current	—	± 10	mA

(*) : C = 200pF, R = 0Ω, one time discharge

ELECTRICAL CHARACTERISTICS (Unless otherwise specified, Ta = 25 ± 1.5°C, V_{DD} = 5.0V)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V _{opr}	—	—	4.0	5.0	6.0	V
Oscillation Frequency Characteristic	Δf_{osc1}	—	1H C = 4700pF, R = 254.9kΩ, V _{DD} = 5V (f = 582.5Hz)	—	—	10	%
			60s C = 1000pF, R = 17.2kΩ, V _{DD} = 5V (f = 34.9kHz)	—	—	15	
			8H C = 0.01μF, R = 996.7kΩ, V _{DD} = 5V (f = 72.8Hz)				

CHARACTERISTIC		SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Power Dissipation Current	1	I _{QD}	—	CR OSC. stopping (at reset) V _{DD} = 6V	—	—	130	μA
	2	I _{DD}	—	CR OSC. operating (at 60s setting)	—	—	700	
Power on Reset Release Voltage		V _{thH}	—	V _{DD} rise time	1.4	2.5	3.5	V
		V _{thL}	—	40 μs/V	1.4	2.5	3.5	

DC CHARACTERISTICS


1. Oscillation Input								
OSC1 Leak Current	I _{IH OSC}	—	V _{IN} = 5.0V	- 1.0	—	1.0	μA	
OSC1 Leak Current	I _{IL OSC}	—	V _{IN} = 0V	- 1.0	—	1.0	μA	
2. CMP Terminal								
CMP Offset Voltage	V _{off}	—	V _{DD} = 5V	- 30	—	30	mV	
Offset Supply Voltage Change	ΔV _{off}	—	V _{DD} = 4~6V	- 10	—	10	mV	
CMP ⁺ , CMP ⁻ Leak Current	I _{IH CMP⁺, -} I _{IL CMP⁺, -}	—	V _{IN} = 5.0V	- 1.0	—	1.0	μA	
			V _{IN} = 0V	- 1.0	—	1.0		
Input Dynamic Range	—	—	—	0	—	V _{DD} - 2.5	V	
3. Reset Terminal								
Leak Current	I _{IHR}	—	V _{IN} = 5.0V	- 1.0	—	1.0	μA	
Input Pull Up Resistance	R ₃	—	—	490	700	910	kΩ	
4. Timer OUT1, 2 Terminal								
Timer Out1, 2 Sink Current	I _{TS}	—	V _{OL} = 0.3V	—	—	5	mA	
Timer Out Offleak Current	I _{TLH1, 2}	—	V _{IN} = 0~5.0V	- 1.0	—	1.0	μA	

FUNCTION CHARACTERISTICS

Timer 1 Precision (TIMER OUT1)	ΔT ₁	—	C = 4700pF, R = 254.9kΩ, V _{DD} = 5V (1H)	—	—	10	%
	ΔT ₂	—	C = 1000pF, R = 17.2kΩ, V _{DD} = 5V (60s)	—	—	15	
C = 0.01 μF, R = 966.7kΩ, V _{DD} = 5V (8H)							
CMP Detecting Timer Precision	t _c	—	C = 4700pF, R = 254.9kΩ, V _{DD} = 5V (1H) Typ. = 3.5s	- 50	—	50	%
Timer 2 Precision (TIMER OUT2)	Duty	—	C = 4700pF, R = 254.9kΩ, V _{DD} = 5V (1H)	0.85	1 : 7	1.15	—
	Frequency			: 7.15			
				0.967	1.137	1.308	Hz

APPLICATION CIRCUIT (example)

1 hour setting

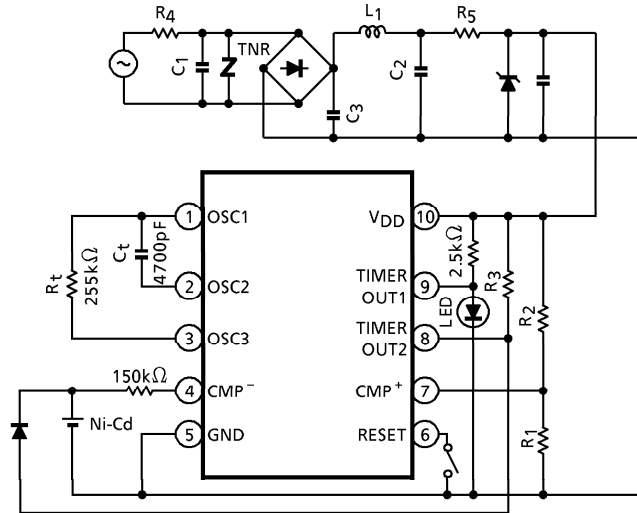

Timer setting time

$$T = 2^{21} \cdot C_t \cdot R_t \cdot \ln \left\{ \frac{V_{DD}^2 - V_f^2}{V_{TH} (V_{DD} - V_{TH})} \right\}$$

T : Timer setting time (s)

C_t (F)

R_t (Ω)

V_{TH} = 1.95 (V) : Voltage of OSC. first stage circuit


V_f = 0.7 (V) : Voltage of input protection diode (1Pin)

(*) Recommendation of timer setting

TIMER SET UP	R _t	C _t
About 60s	17.2kΩ	1000pF
About 1Hour	254.9kΩ	4700pF
About 8Hour	966.7kΩ	0.01μF

PACKAGE DIMENSIONS
SSOP10-P-225-1.00

Unit : mm

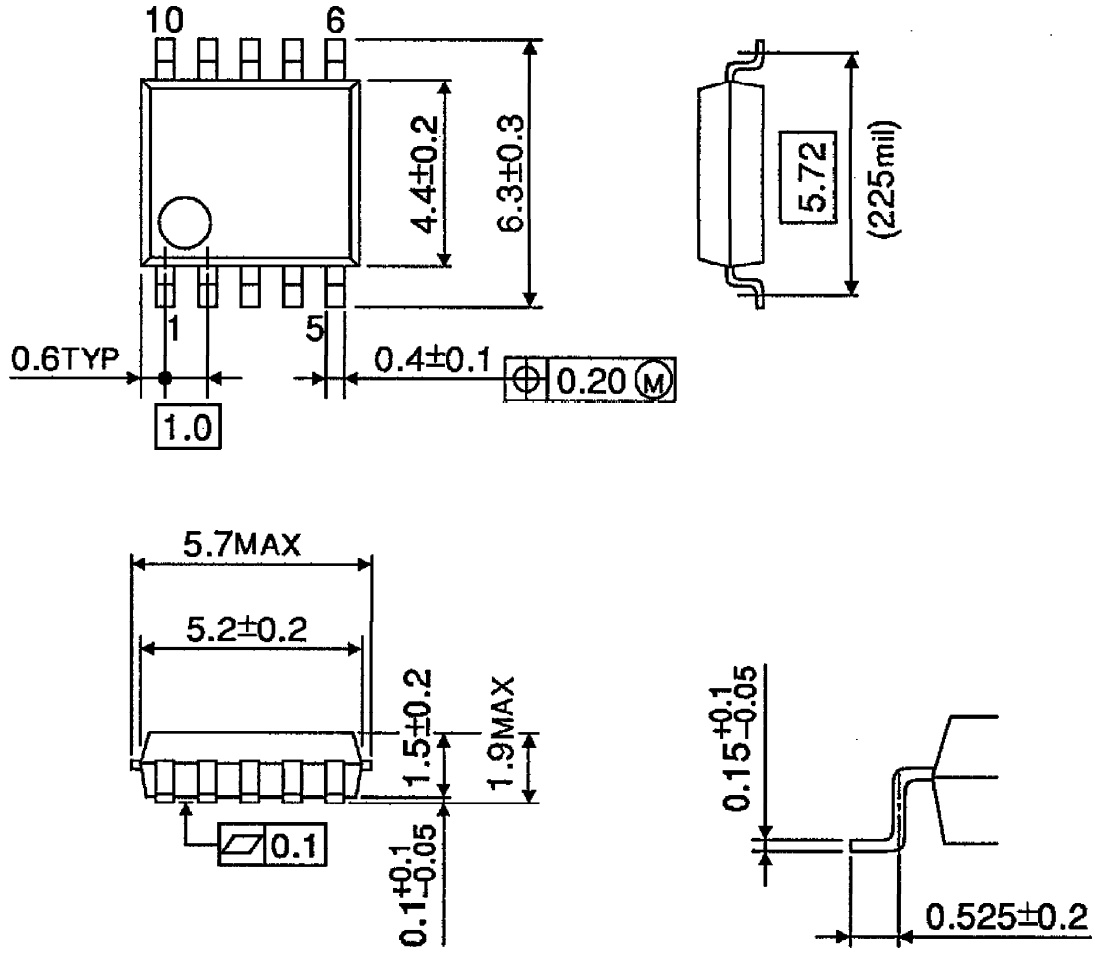

Weight : 0.1g (Typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.