

SAW Components

Data Sheet B4125





SAW Components

B4125

Low-Loss Filter for Mobile Communication

881,5 MHz

Data Sheet




Ceramic package DCC6C

Features

- Low-loss RF filter for AMPS mobile telephone system, receive path
- Low amplitude ripple
- Usable passband 25 MHz
- Ceramic package for Surface Mounted Technology (SMT)

Terminals

Ni, gold-plated






Dimensions in mm, approx. weight 0,037 g

Pin configuration

2 Input5 Output

1, 3, 4, 6 Ground, to be grounded



Туре	Ordering code	Marking and Package according to	Packing according to		
B4125	B39881-B4125-U410	C61157-A7-A67	F61074-V8088-Z000		

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 / + 85	°C	
Storage temperature range	$T_{\rm sta}$	- 40 / + 85	°C	
DC voltage	$V_{\rm DC}$	3	V	
Input power max.	P_{IN}	5	dBm	source impedance 50 Ω



SAW Components

B4125 **Low-Loss Filter for Mobile Communication** 881,5 MHz

Data Sheet



Characteristics

 $T = -30 \text{ to } +85 \,^{\circ}\text{C}$ Operating temperature range:

 $\begin{array}{ll} Z_{\rm S} &= 50~\Omega \\ Z_{\rm L} &= 50~\Omega \end{array}$ Terminating source impedance: Terminating load impedance:

				min.	typ.	max.	
Center frequency			$f_{\mathbb{C}}$	_	881,5	_	MHz
Maximum insertion attenuation			α_{max}				
869,0	894,0	MHz		_	2,6	3,0	dB
Amplitude ripple (p-p)			Δα				
869,0	894,0	MHz		_	1,1	1,5	dB
VSWR							
869,0	894,0	MHz		_	1,5	1,6	
Attenuation		α					
0,0	824,0	MHz		35,0	50,0	_	dB
824,0	849,0	MHz		35,0	45,0	_	dB
970,0	997,0	MHz		35,0	60,0	_	dB
997,0	1150,0	MHz		40,0	60,0	_	dB
1150,0	1500,0	MHz		30,0	50,0	_	dB
1500,0	2000,0	MHz		25,0	38,0	_	dB
2000,0	3000,0	MHz		20,0	25,0	_	dB
							1



SAW Components B4125


Low-Loss Filter for Mobile Communication

881,5 MHz


Data Sheet

\equiv MD

Transfer function

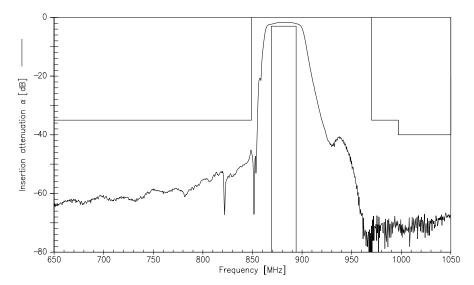

Transfer function (wideband)

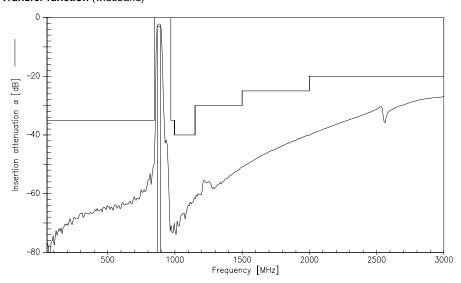




SAW Components B4125


Low-Loss Filter for Mobile Communication

881,5 MHz

Data Sheet

Reflection functions

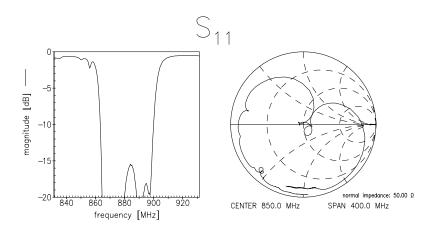

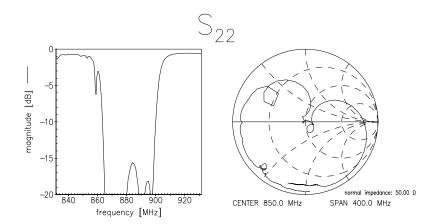



SAW Components B4125

Low-Loss Filter for Mobile Communication

881,5 MHz

Data Sheet



Published by EPCOS AG Surface Acoustic Wave Components Division, OFW E MF P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.