



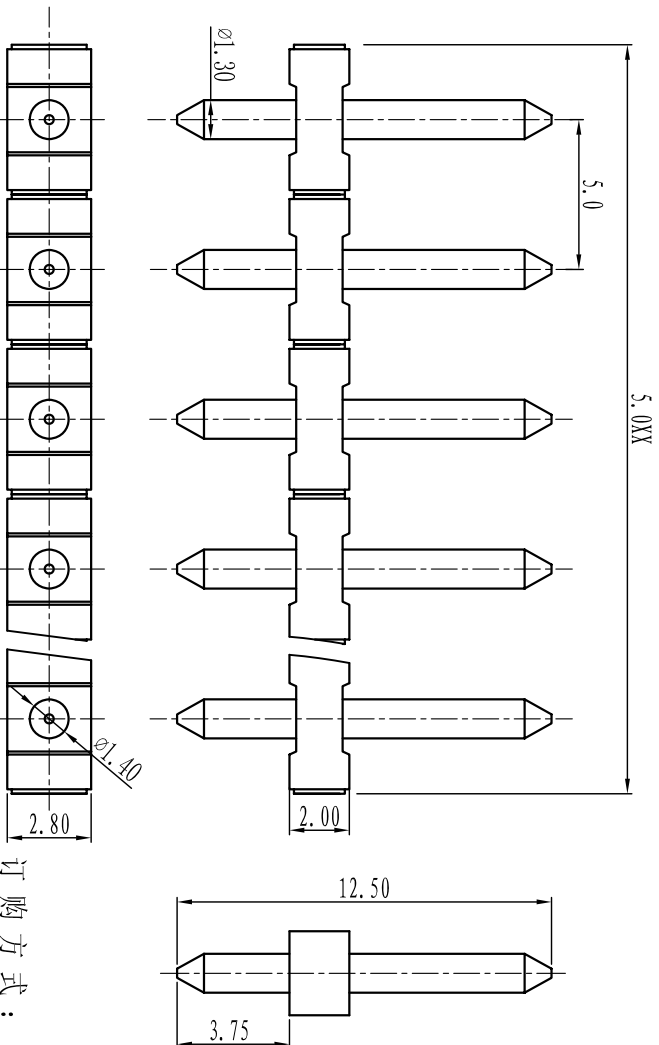

慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

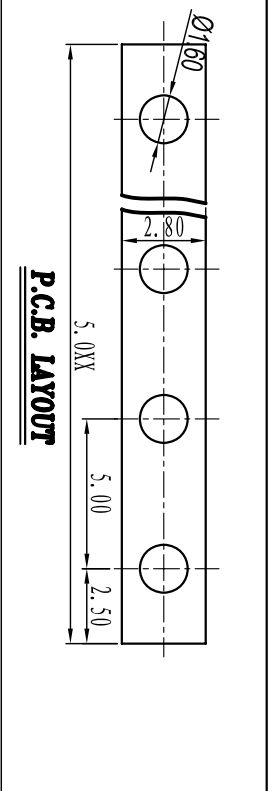


电气性能/Electrical
 参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 250V
 额定电流/Rated current: 10A 18A
 接触电阻/Contact resistance: 20m Ω
 耐电压/Withstanding voltage: AC2000V/1Min
 绝缘电阻/Insulation resistance: 500M Ω /DC5000V
机械性能/Mechanical
 温度范围/Temp.Range: -40 $^{\circ}$ C~+120 $^{\circ}$ C
 瞬间温度/MAX Soldering: +250 $^{\circ}$ C, for 5 Sec

尺寸/Dimensions
 间距/Pitch: 5.0mm
 极数/Poles: 2P-24P
材质及电镀/Material
 塑件/Housing: PBT, UL94V-0
 焊针/Pin header: Brass, Ni plated

TOLERANCES EXCEPT AS NOTED

linear dimension	Tolerances Standard GB/T 14486-2008)										≡	—	□	//	⊥													
variable range	6 to	6 to	10 to	10 to	18 to	18 to	30 to	30 to	50 to	50 to	80 to	80 to	120 to	120 to	160 to	160 to	200 to	200 to	250 to	250 to	all	5 to	5 to	30 to	30 to	120 to	120 to	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4												

订购方式：
HOW TO ORDER

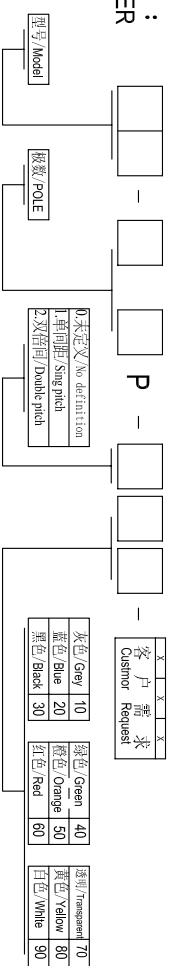

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	比例
第一视角/THIRD ANGLE PROJECTION					
名称/NAME	慈溪市万捷电子有限公司				WJ32J-XP-1Y-00A