



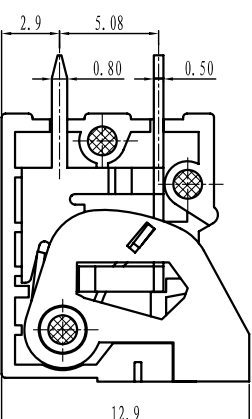



# 慈溪市万捷电子有限公司

## CIXI WANJIE ELECTRONIC CO., LTD

产品规格书  
product specification




SECTION A-A

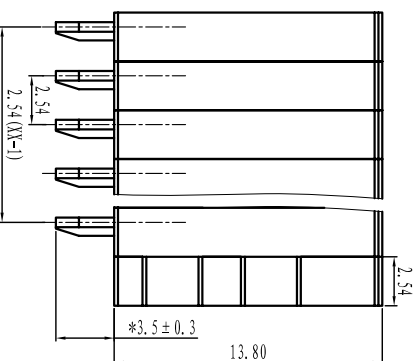

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	short angle sid	≡	□	//	⊥
variable range	over 6 to 30	over 30 to 120	over 120 to 480	all to 6	over 6 to 10	over 10 to 50	over 50 to 120	all to 5
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1
	6 to 30	30 to 120	120 to 480	all to 6	10 to 50	50 to 120	all to 5	5 to 30
	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1
	6 to 30	30 to 120	120 to 480	all to 6	10 to 50	50 to 120	all to 5	5 to 30
	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1
	6 to 30	30 to 120	120 to 480	all to 6	10 to 50	50 to 120	all to 5	5 to 30
	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1

订购方式：  
HOW TO ORDER

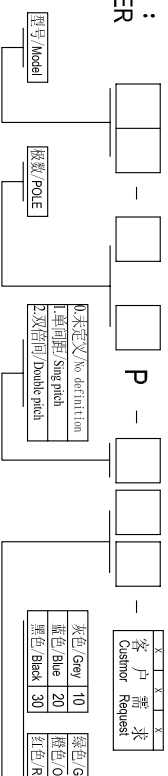

电气性能/Electrical  
 参考标准/Standard: UL IEC  
 额定电压/Rated voltage: 150V 130V  
 额定电流/Rated current: 2A 6A  
 使用线径/Wire range: 26-18AWG 1.0mm<sup>2</sup>  
 耐电压/Withstanding voltage: AC1250V/1Min  
 绝缘电阻/Insulation resistance: 500MΩ/DC500V  
 机械性能/Mechanical

温度范围/Temp.Range: -40° C~+105° C  
 瞬间温度/MAX Soldering: +250° C, for 5 Sec  
 剥线长度/Strip length: 11mm

尺寸/Dimensions

间距/Pitch: 2.54mm  
 极数/Poles: 1P-XXP

材质及电镀/Material

塑件/Housing: PA66, UL94V-0  
 簧片/Wire guard: Stainless steel(SUS301)  
 焊脚/Pin header: Brass, Tin plated

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE 第一视角/FIRST ANGLE PROJECTION

慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD 名称/NAME WJ141V-2.54-XXP-1Y-00A