

TOSHIBA CMOS DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

T 7 9 8 0 S

T7980S SINGLE-CHIP CMOS LSI FOR LCD CALCULATORS

The T7980S is single-chip microcomputer for 8-digit + 1-digit scientific calculation.

T7980S is the complete single-chip CMOS LSI for calculator with 8 digits, 45 functions, 3 expression and hexadecimal, octal and binary, statistic calculation, and fractional number calculation with the following features.

FEATURES

- 8-digit display plus 1-digit code at the right margin.

- Scientific display.

Mantissa 6 digits plus exponent 2 digits plus negative code 2 digits.

- Fractional number display.

9 digits plus negative code 1 digit.

- Other than above

Mantissa 8 digits plus negative code 1 digit.

- 9 kinds of special display

M	Memory
-	Mantissa and exponent Minus
E	Error
INV	Inverse
()	Parenthesis calculation


STAT	Statistic calculation mode
DEG	Degree
RAD	Radian
GRAD	Gradian

- The minus sign of the mantissa is floating minus.

- The arithmetic key operation in clouding Y^X or $\sqrt[X]{Y}$ has same sequence as mathematical equation.
4 pending operations are allowed and () are up to continuous 15 levels.

- Fractional number calculation.


- It is possible to convert or fix the display number system by F.S key.

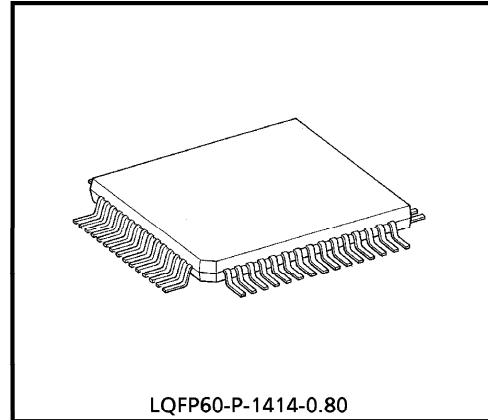

Weight : 0.66g (Typ.)

- One independent accumulating memory.
- It is possible to specify decimal part digits (0~7) by FIX key.
- Direct drive for FEM LCD (1/3 prebias, 1/4 duty).
- Automatic power on clear.
- Low-power consumption. $V_{SS} = -3.0V$ single power supply.
- The 60-pin flat package is used.


SYSTEM BLOCK DIAGRAM

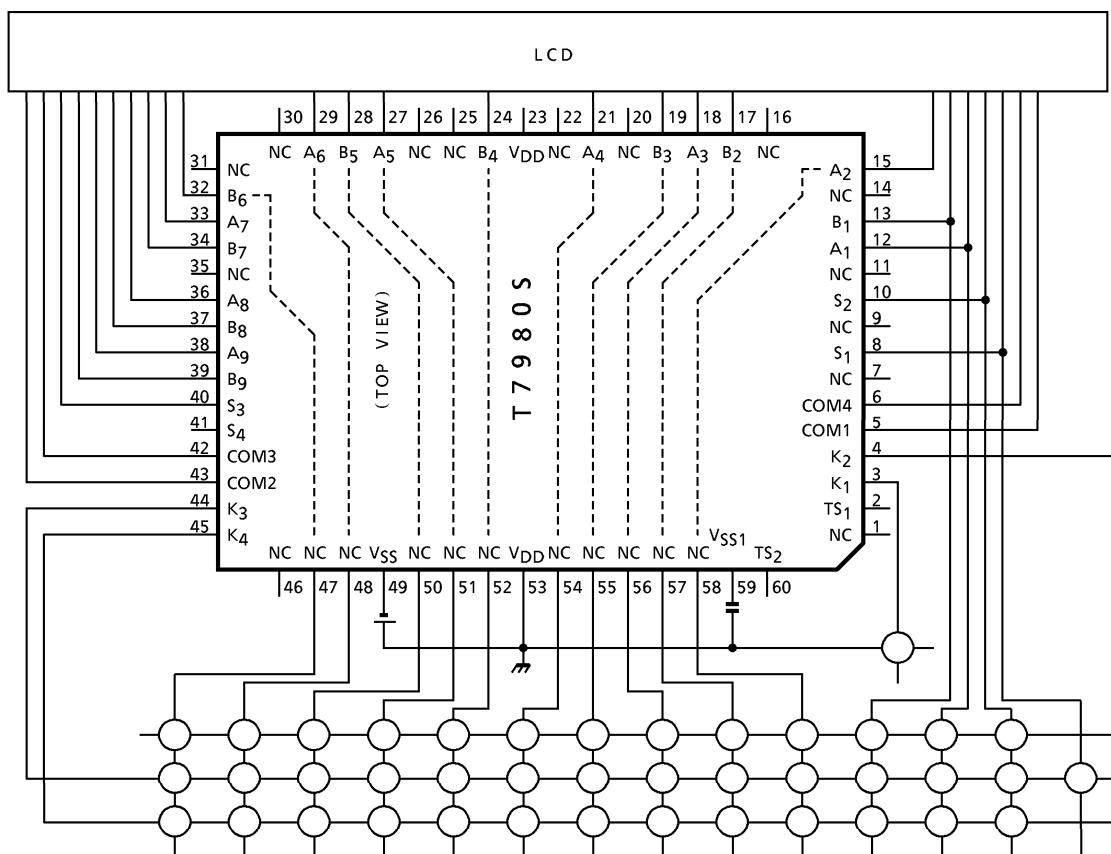


(Note) Input capacity ≤ 300 (pF) at $V_{SS} = -2.6$ (V)
 Key resistance ≤ 1.5 ($k\Omega$) at $V_{SS} = -2.6$ (V)

CONNECTION OF LCD


SEGMENT

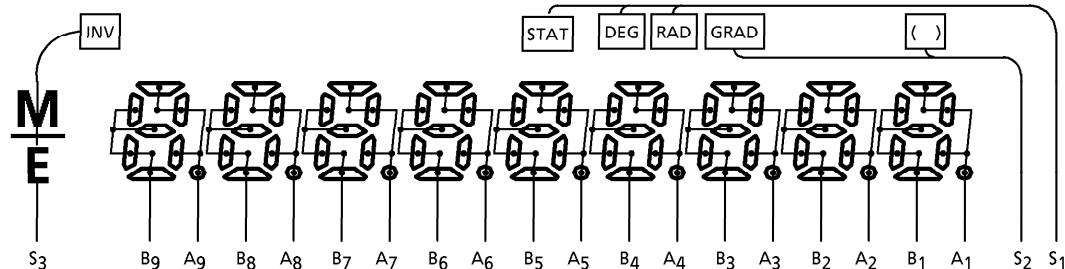


COMMON

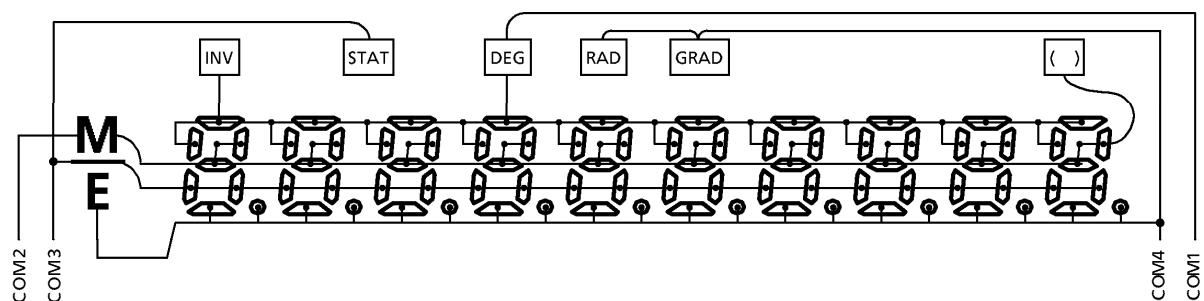


SET KEY LAYOUT (Example)

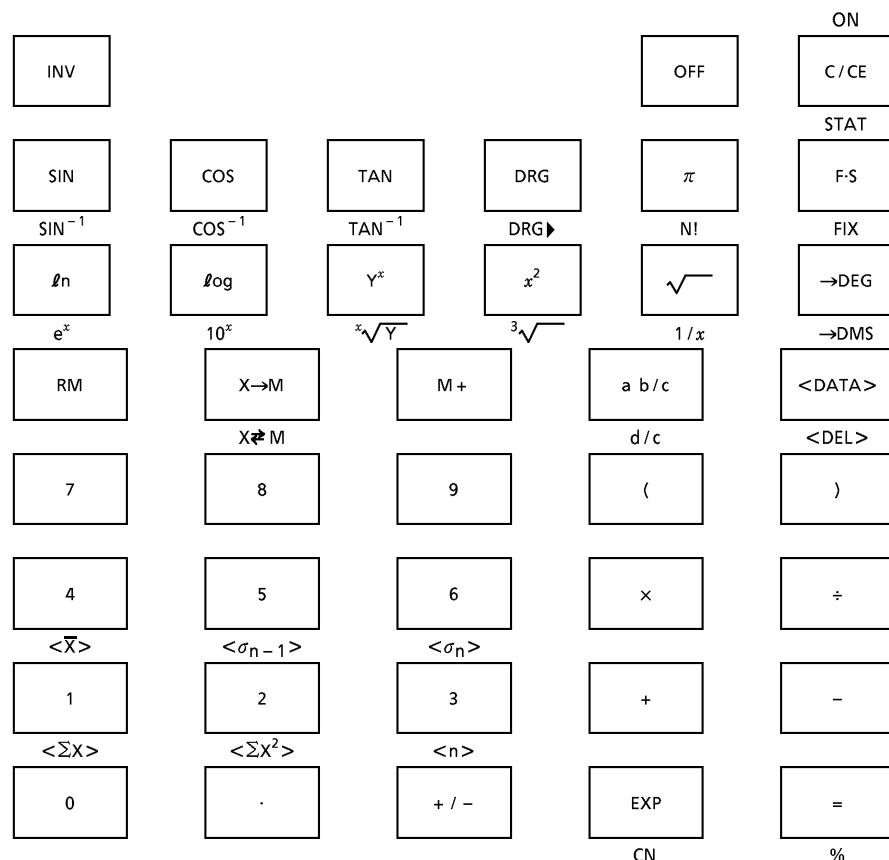

KEY CONNECTION

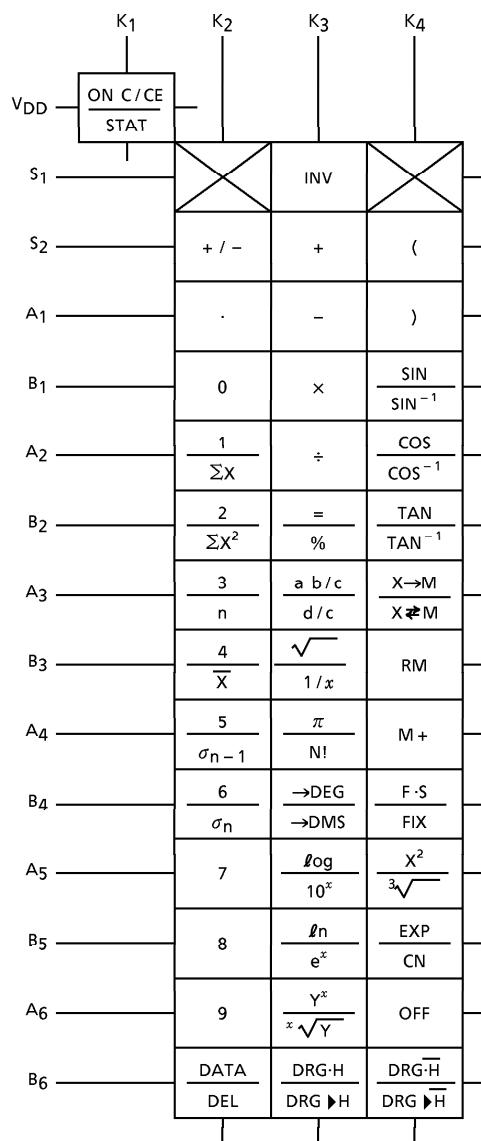

PIN ASSIGNMENT

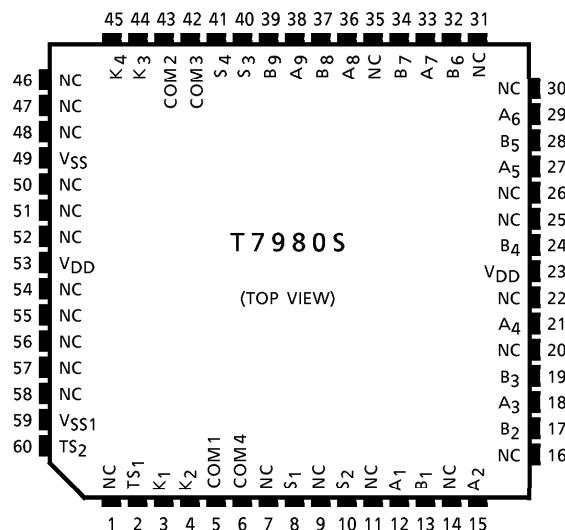

SPECIFICATION OF CALCULATOR

Speed of Calculator

Key on 5.8ms

Key off 82ms

 $f_{\phi} \text{WAIT} = 30\text{kHz}$, $f_{\phi} \text{op} = 70\text{kHz}$

The calculation speed doesn't include the key on or off time.

Item	Operation			Calculation speed (ms)
Number	DEC		5	12
			5	12
Function	DEC		5	40
			5	41
4-operation	DEC	1 + 2	+	60
		1 0 0 0 0 0 0 - 1	-	70
		5 × 9	×	83
		5 5 5 5 5 × 9 9 9 9 9	×	91
		5 ÷ 9	÷	41
		5 5 5 5 5 ÷ 9 9 9 9 9	÷	128
Y ^x , $\sqrt[x]{Y}$		3 Y ^x 4	=	605
		3 $\sqrt[x]{Y}$ 4	=	636
SIN	DEG	3 0	SIN	643
	RAD	$\pi \div 6 =$	SIN	803
	GRAD	1 0 0 ÷ 3 =	SIN	686
COS	DEG	6 0	COS	648
	RAD	$\pi \div 3 =$	COS	757
	GRAD	2 0 0 ÷ 3 =	COS	695

Item	Operation				Calculation speed (ms)
TAN	DEG	4	5	TAN	242
	RAD	π	\div	4 = TAN	306
	GRAD	5	0	TAN	242
SIN ⁻¹	DEG	0.	5	SIN ⁻¹	556
	RAD	0.	5	SIN ⁻¹	462
	GRAD	0.	5	SIN ⁻¹	547
COS ⁻¹	DEG	0.	5	COS ⁻¹	647
	RAD	0.	5	COS ⁻¹	527
	GRAD	0.	5	COS ⁻¹	639
TAN ⁻¹	DEG		1	TAN ⁻¹	230
	RAD		1	TAN ⁻¹	154
	GRAD		1	TAN ⁻¹	225
Ln		2	0	ln	192
Log		2	0	log	236
e ^x		2	0	e ^x	234
10 ^x		1.	2	3 10 ^x	290
			1	0 10 ^x	105
X!		6	9	N!	698
X ²		2	0	X ²	57
$\sqrt{}$		2	0	$\sqrt{}$	184
1/X		2	0	1/X	72
$\sqrt[3]{}$		2	0	$\sqrt[3]{}$	535
→DEG		1.	2	3 4 5 →DEG	175
→DMS		1.	2	3 4 5 →DMS	173
→RAD	DEG	3	6	0 DRG▶	131
→GRAD	RAD	2	$\times \pi$	= DRG▶	104
→DEG	GRAD	4	0	0 DRG▶	59
Memory		1	2	3 X→M	33
		1	2	3 X→M M+	36
		1	2	3 X→M RM	27
		1	2	3 X→M X↔M	33
%		1	2	3 + 4 5 6 %	65
		1	2	3 - 4 5 6 %	65
		1	2	3 × 4 5 6 %	34
		1	2	3 ÷ 4 5 6 %	34
Statistic Calculation	1 DATA	2 DATA	3 DATA 8 DATA 9 DATA	228
				n	32
				\bar{X}	70
				ΣX	31
				ΣX^2	30
				σ_{n-1}	318
				σ_n	378
The above-mentioned data					

ITEM	OPERATION				CALCULATION SPEED (ms)
Fractional number Calculation	Function	2 ab/c 3 6 ab/c 2 3 4	-	-	116
		2 ab/c 3 6 ab/c 2 3 4	÷	-	117
	4- operation	2 _ 36J 234 + 3 _ 45 J 345	=	-	271
		2 _ 36J 234 - 3 _ 45 J 345	=	-	261
		2 _ 36J 234 × 3 _ 45 J 345	=	-	231
		2 _ 36J 234 ÷ 3 _ 45 J 345	=	-	197

OPERATION RANGE AND ACCURACY

FUNCTION	ANGLE UNIT	OPERATION RANGE	UNDER FLOW AREA	NORMAL ACCURACY
SIN X	DEG	$0 \leq X \leq 4.4999999 \times 10^9$	$0 \leq X \leq 5.7295779 \times 10^{-98}$	± 1 in 8th significant digit
	RAD	$0 \leq X \leq 78539816.$	$0 \leq X \leq 1.0000000 \times 10^{-99}$	
	GRAD	$0 \leq X \leq 4.9999999 \times 10^9$	$0 \leq X \leq 6.3661977 \times 10^{-98}$	
COS X	DEG	$0 \leq X \leq 4.5000000 \times 10^9$	—	± 1 in 8th significant digit
	RAD	$0 \leq X \leq 78539817.$	—	
	GRAD	$0 \leq X \leq 5.0000000 \times 10^9$	—	
TAN X	DEG	SAME AS SIN X except for $ X = (2n - 1) \cdot 90$	SAME AS SIN X	± 1 in 8th significant digit
	RAD	SAME AS SIN X except for $ X = (2n - 1) \cdot \pi / 2$	SAME AS SIN X	
	GRAD	SAME AS SIN X except for $ X = (2n - 1) \cdot 100$	SAME AS SIN X	
SIN ⁻¹ X	DEG	$0 \leq X \leq 1$	$0 \leq X \leq 1.5707963 \times 10^{-99}$	± 1 in 8th significant digit
	RAD	$0 \leq X \leq 1$	—	
	GRAD	$0 \leq X \leq 1$	$0 \leq X \leq 1.5707963 \times 10^{-99}$	
COS ⁻¹ X	DEG	SAME AS SIN ⁻¹ X	—	± 1 in 8th significant digit
	RAD	SAME AS SIN ⁻¹ X	—	
	GRAD	SAME AS SIN ⁻¹ X	—	
TAN ⁻¹ X	DEG	$0 \leq X \leq 9.9999999 \times 10^{99}$	SAME AS SIN ⁻¹ X	± 1 in 8th significant digit
	RAD	$0 \leq X \leq 9.9999999 \times 10^{99}$	—	
	GRAD	$0 \leq X \leq 9.9999999 \times 10^{99}$	SAME AS SIN ⁻¹ X	
LN X		$0 < X$	—	
LOG X		$0 < X$	—	
e ^X		$-9.9999999 \times 10^{99}$ $\leq X \leq 230.25850$	$-9.9999999 \times 10^{99}$ $\leq X \leq -227.95593$	
10 ^X		$-9.9999999 \times 10^{99}$ $\leq X \leq 99.999999$	$-9.9999999 \times 10^{99}$ $\leq X \leq -99.000001$	

FUNCTION	OPERATION RANGE	UNDER FLOW AREA	NORMAL ACCURACY
X!	$0 \leq X \leq 69$ (INTEGER)	—	± 1 in 8th significant digit
$\frac{1}{X}$	1×10^{-99} $\leq X \leq 9.9999999 \times 10^{99}$ ($X \neq 0$)	1.0000001×10^{99} $\leq X \leq 9.9999999 \times 10^{99}$	
X^2	$0 \leq X \leq 9.9999999 \times 10^{49}$	$0 \leq X \leq 3.1622776 \times 10^{-50}$	
\sqrt{X}	$0 \leq X \leq 9.9999999 \times 10^{99}$	—	
$\sqrt[3]{X}$	$0 \leq X \leq 9.9999999 \times 10^{99}$	—	
DMS→DEG	$0 \leq X \leq 9.9999999 \times 10^7$	—	± 1 in least significant digit
DEG→DMS	$0 \leq X \leq 9.9999999 \times 10^7$	$0 \leq X \leq 1.3888888 \times 10^{-6}$	
DEG→RAD	$0 \leq X \leq 9.9999999 \times 10^{99}$	$0 \leq X \leq 5.7295779 \times 10^{-98}$	
RAD→GRAD	$0 \leq X \leq 1.5707963 \times 10^{98}$	—	± 1 in 8th significant digit
GRAD→DEG	$0 \leq X \leq 9.9999999 \times 10^{99}$	$0 \leq X \leq 1.1111111 \times 10^{-99}$	
Y^X	$-9.9999999 \times 10^{99}$ $\leq X \cdot \ln Y \leq 230.25850$	$-9.9999999 \times 10^{99}$ $\leq X \cdot \ln Y \leq -227.95593$	
	(1) $Y > 0$ … The above-mentioned operation range. (2) $Y < 0$ … X (Integer) or $1/X$ (Odd, $X \neq 0$) … The above-mentioned operation range. (3) $Y = 0$ … $0 < X$		
$x\sqrt{Y}$	$-9.9999999 \times 10^{99}$ $\leq \frac{1}{X} \cdot \ln Y \leq 230.25850$	$-9.9999999 \times 10^{99}$ $\leq \frac{1}{X} \cdot \ln Y \leq -227.95593$	± 1 in 8th significant digit
	(1) $Y > 0$ … The above-mentioned operation range. (2) $Y < 0$ … X (Odd) or $1/X$ (Integer, $X \neq 0$) … The above-mentioned operation range. (3) $Y = 0$ … $0 < X$		
Statistic	DATA DEL	Operation range	± 1 in 8th significant digit
		$ x \leq 9.9999999 \times 10^{49}$ $ \sum X \leq 9.9999999 \times 10^{99}$ $\sum X^2 \leq 9.9999999 \times 10^{99}$ $0 \leq n \leq 9999999. n = \text{Integer}$	
	\bar{x}	$n \neq 0$	
	σ_{n-1}	$n \neq 1, n \neq 0$ $0 \leq \frac{\sum X^2 - \{(\sum X)^2 / n\}}{n-1} \leq 9.9999999 \times 10^{99}$	
	σ_n	$n \neq 0$ $0 \leq \frac{\sum X^2 - \{(\sum X)^2 / n\}}{n} \leq 9.9999999 \times 10^{99}$	

MAXIMUM RATINGS

CHARACTERISTICS	SYMBOL	RATING	UNIT
Supply Voltage	V _{SS}	+0.3~ -3.5	V
Input Voltage	V _{IN}	+0.3~V _{DD} -0.3	V
Operating Temperature	T _{opr}	0~40	°C
Storage Temperature	T _{stg}	-55~125	°C

ELECTRICAL CHARACTERISTICS (V_{SS} = -3.0 ± 0.2V, V_{DD} = 0V, Ta = 25 ± 1.5°C)


CHARACTERISTICS	SYMBOL	TEST CIR-CUIT	PIN NAME	TEST CONDITION	MIN	TYP.	MAX	UNIT
Operating Voltage	—	—	—	—	-2.5	-3.0	-3.4	V
Supply Current	I _{DD} WAIT	—	—	V _{SS} = -3.0V, wait	—	26	46	μA
Supply Current	I _{DD} OP	—	—	V _{SS} = -3.0V, operate	—	52	78	μA
Supply Current	I _{DD} OFF	—	—	V _{SS} = -3.0V, off	—	1	3	μA
Oscillating Frequency	f _φ WAIT	—	—	V _{SS} = -3.0V, wait	18	30	42	kHz
Oscillating Frequency	f _φ OP	—	—	V _{SS} = -3.0V, operate	42	70	98	kHz
Frame Frequency	f _F	—	—	V _{SS} = -3.0V, wait	70	117	164	Hz
Timer	T timer	—	—	V _{SS} = -3.0V	428	600	1000	s
"1" Input Voltage	V _{IH}	—	K ₁ ~K ₄	—	V _{SS} + 0.5	—	V _{SS}	V
"0" Input Voltage	V _{IL}	—	K ₁ ~K ₄	—	V _{DD}	—	-0.5	V
"1" Output Resistance	R _{KEY}	—	SEG	V _{OUT} = V _{SS} + 0.5V : KEY STROBE	—	—	2	kΩ
"0" Output Resistance	R _{SEG} (L)	—	SEG	V _{OUT} = V _{DD} - 0.5V	—	—	90	kΩ
"1" Output Resistance	R _{SEG} (H)	—	SEG	V _{OUT} = V _{SS} + 0.5V : KEY STROBE	—	—	90	kΩ
"0" Output Resistance	R _{COM} (L)	—	COM	V _{OUT} = V _{DD} - 0.5V	—	—	25	kΩ
"1" Output Resistance	R _{COM} (H)	—	COM	V _{OUT} = V _{SS} + 0.5V	—	—	25	kΩ
KEY Pull Up Resistance	R _{PULL UP}	—	K ₁	V _{OUT} = 0V	27	45	63	kΩ
KEY Pull Down Resistance	R _{PULL DOWN}	—	K ₂ ~K ₄	V _{OUT} = V _{SS}	27	45	63	kΩ
"M" Output Resistance	R _{OM}	—	SEG	V _{OUT} = $\frac{1}{3}$ V _{SS} - 0.5V	—	100	—	kΩ
"M" Output Resistance	R _{OM}	—	SEG	V _{OUT} = $\frac{2}{3}$ V _{SS} + 0.5V	—	100	—	kΩ
"M" Output Resistance	R _{OM}	—	COM	V _{OUT} = $\frac{1}{3}$ V _{SS} - 0.5V	—	77	—	kΩ
"M" Output Resistance	R _{OM}	—	COM	V _{OUT} = $\frac{2}{3}$ V _{SS} + 0.5V	—	77	—	kΩ

CHARACTERISTICS	SYMBOL	TEST CIR-CUIT	PIN NAME	TEST CONDITION	MIN	TYP.	MAX	UNIT
"1" Output Voltage	V _{OH}	—	K ₁	(Note 1)	V _{SS} + 0.2	V _{SS}	V _{SS}	V
"0" Output Voltage	V _{OL}	—	K ₂ ~K ₄	(Note 1)	V _{DD}	V _{DD}	V _{DD} - 0.2	V
"1" Output Voltage	V _{OH}	—	SEG COM	—	V _{SS} + 0.2	V _{SS}	V _{SS}	V
"M" Output Voltage	V _{OM}	—	SEG COM	—	2 / 3 V _{SS} + 0.2	2 / 3 V _{SS}	2 / 3 V _{SS} - 0.2	V
"M" Output Voltage	V _{OM}	—	SEG COM	—	1 / 3 V _{SS} + 0.2	1 / 3 V _{SS}	1 / 3 V _{SS} - 0.2	V
"0" Output Voltage	V _{OL}	—	SEG COM	—	V _{DD}	V _{DD}	V _{DD} - 0.2	V


(Note 1) The key buffer is high impedance at keystroke.

WAVEFORMS FOR DISPLAY

Display

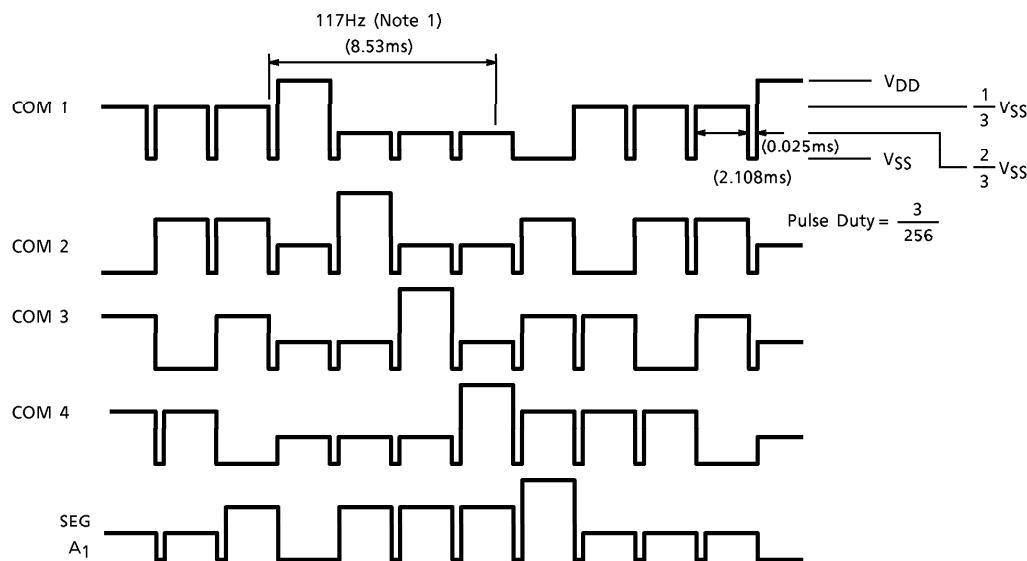

Key pulse output

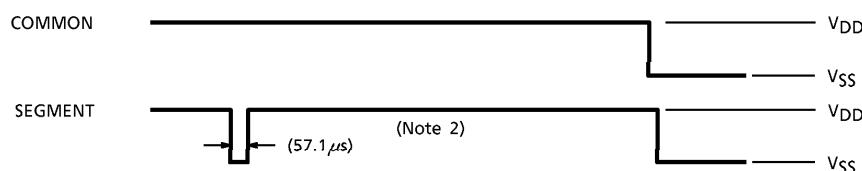



(Note 1) $F_{\phi} \text{WAIT} = 30\text{kHz}$

(Note 2) $F_{\phi} \text{OP} = 70\text{kHz}$

PACKAGE DIMENSIONS

LQFP60-P-1414-0.80

Unit : mm

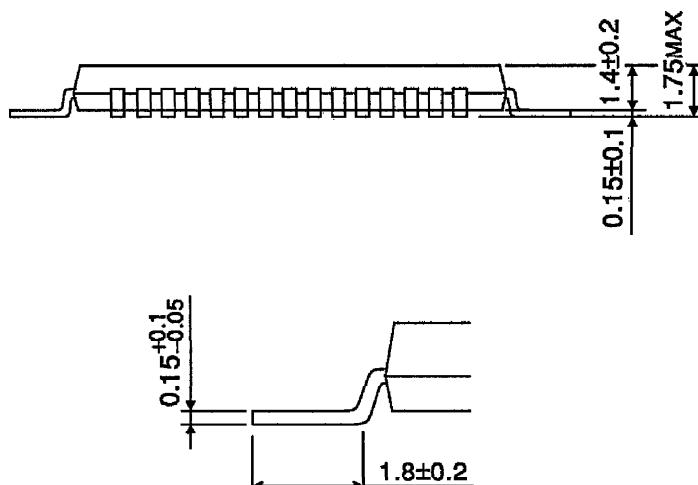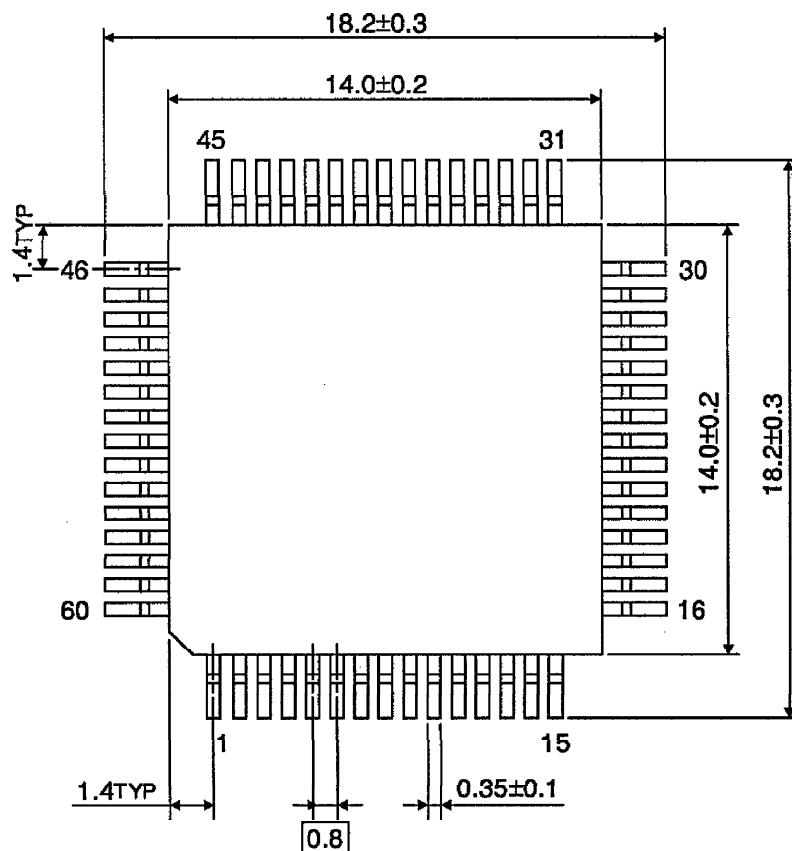

Weight : 0.66g (Typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.