

Preliminary

TOSHIBA Bipolar Linear Integrated Circuit Silicon Monolithic

TA1324AFN


Mixer Oscillator Built-in Frequency Synthesizer
for VHF, CATV and UHF Band.

The TA1324AFN is a single chip which integrates a PLL and a Mixer, Oscillator for VHF, CATV and UHF band.

The control data conforms to 3-wire bus and I²C-bus formats.

Bus-SW can be used to easily switch for easy tuner system set-up.

Flat, compact package: SSOP30 (0.65 mm pitch)

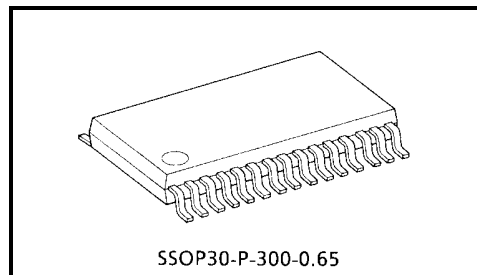

SSOP30-P-300-0.65

Weight: 0.17 g (typ.)

Features

- Low supply voltage: 5.0 V (typ.)
- For VHF, CATV, HYPER BAND and UHF BAND, 2-band oscillator and 2-mixer
- IF amplifier circuit
- Single IF output terminal
- Fast mode I²C-bus format control
- 3-wire bus format control
- 18-bit and 19-bit automatic discrimination circuit (when 3-wire bus selected)
- No prescaler
- 33 V high voltage tuning amplifier built-in
- 4-bit bandswitch drive transistor
- 5-level A/D converter (when I²C-bus selected)
- Frequency step: 31.25kHz, 50kHz, 62.5kHz (at 4MHz X'tal used)
- 4 programmable chip address (when I²C-bus selected)
- Power on reset circuit

Power-On Reset Operation Conditions

- Frequency step: 62.5 kHz
- Charge pump output current: Low
- Counter data: all [1]
- Band driver: OFF
- Tuning amplifier: ON

Note 1: These devices are easy to be damaged by high voltage or electric fields. In regards to this, please handle with care.

000707EBA1

• TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.

In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..


• The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.

• The products described in this document are subject to the foreign exchange and foreign trade laws.

• The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.

• The information contained herein is subject to change without notice.


Block Diagram

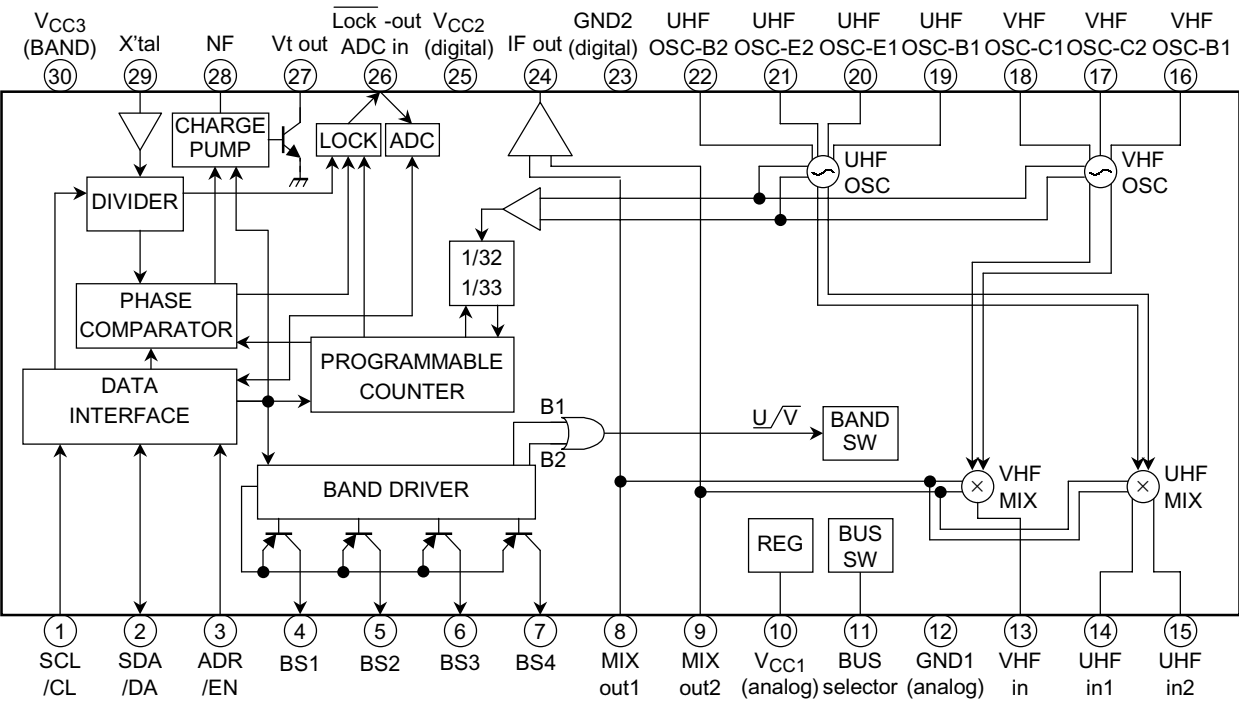

Terminal Function

Pin No.	Pin Name	Pin No.	Pin Name
1	SCL/CL input	16	VHF oscillator-base 1
2	SDA input and output/DA input	17	VHF oscillator-collector 2
3	ADR set (I ² C-bus), EN input (3-wire bus)	18	VHF oscillator-collector 1
4	BAND 1 output	19	UHF oscillator-base 1
5	BAND 2 output	20	UHF oscillator-emitter 1
6	BAND 3 output	21	UHF oscillator-emitter 2
7	BAND 4 output	22	UHF oscillator-base 2
8	MIX output 1	23	GND2 (PLL block)
9	MIX output 2	24	IF output
10	V _{CC1} (analog block)	25	V _{CC2} (PLL block)
11	BUS switch (I ² C-bus = GND, 3-wire bus = open and V _{CC2})	26	ADC input (I ² C-bus), Lock output (3-wire bus)
12	GND1 (analog)	27	V _t output
13	VHF RF input	28	NF
14	UHF RF input 1	29	X'tal input
15	UHF RF input 2	30	V _{CC3} (band block)

Package Dimensions

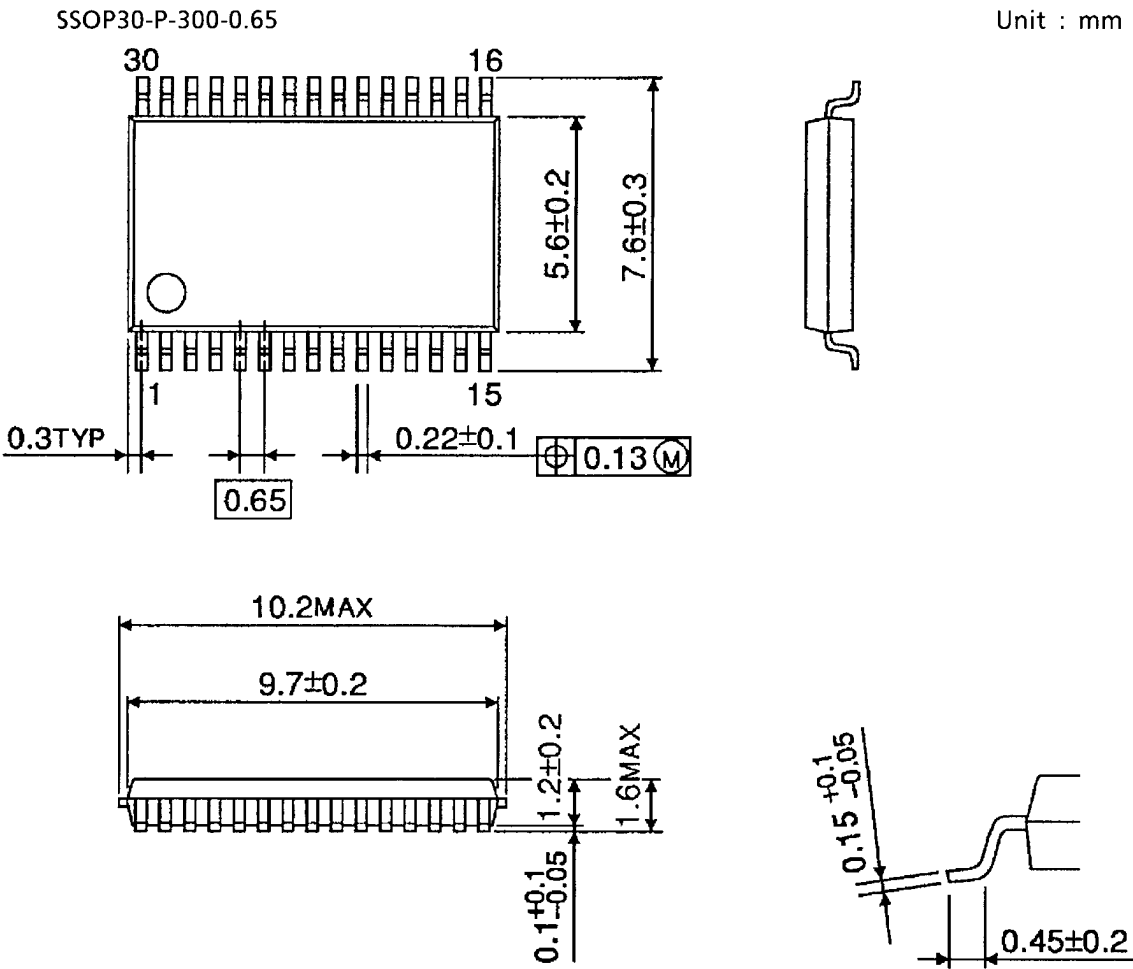

Weight: 0.17 g (typ.)