TOSHIBA Photocoupler Photorelay

# **TLP192A**

**Telecommunications** Measurement and Control Equipment **Data Acquisition System** Measurement Equipment

The Toshiba TLP192A consists of a gallium arsenide infrared emitting diode optically coupled to a photo-MOSFET in a 6-pin SOP package. This photorelay has higher output current rating than phototransistor-type photocoupler; hence, it is suitable for use as On/Off control for high current.

6-pin SOP (2.54SOP6): Height = 2.1 mm, pitch = 2.54 mm

Normally open (1-form-A) device

Peak off-state voltage: 60 V (min)

Trigger LED current: 3 mA (max)


On-state current: 400 mA (max)

• On-state resistance:  $2 \Omega$  (max)


Isolation voltage: 1500 Vrms (min)

UL recognized: UL1557, File No.E67349


#### Pin Configuration (top view)



#### **Schematic**



Unit: mm

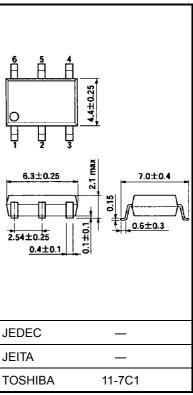

Weight: 0.13 g (typ.)

#### Maximum Rating (Ta = 25°C)


Characteristics			Symbol	Rating	Unit	
	Forward curr	ent	lF	50	mA	
	Forward curr (Ta ≧ 25°C)	ent derating	ΔI <sub>F</sub> /°C	-0.5	mA/°C	
LED	Peak forward (100 μs puls		I <sub>FP</sub>	1	Α	
	Reverse volt	age	$V_{R}$	5	V	
	Junction tem	perature	Tj	125	°C	
	Off-state out voltage	put terminal	V <sub>OFF</sub>	60	V	
	On-state current	A connection		400		
		B connection	I <sub>ON</sub>	400	mA	
Detector		C connection		800		
	Forward current derating (Ta ≧ 25°C)	A connection	Δl <sub>ON</sub> /°C	-4.0		
		B connection		-4.0	mA/°C	
		C connection		-8.0		
	Junction tem	perature	Tj	125	°C	
Storage t	Storage temperature		T <sub>stg</sub>	-55 to 125	°C	
Operating temperature			T <sub>opr</sub>	-40 to 85	°C	
Lead soldering temperature (10 s)			T <sub>sol</sub>	260	°C	
Isolation voltage (AC, 1 min, R.H. $\leq$ 60%) (Note 1)			BV <sub>S</sub>	1500	Vrms	

Note 1: LED pins are shorted together. Detector pins are also shorted together.

## **Recommended Operating Conditions**

Characteristics	Symbol	Min	Тур.	Max	Unit
Supply voltage	$V_{DD}$	_	_	48	V
Forward current	lF	5	7.5	25	mA
On-state current	I <sub>ON</sub>		_	400	mA
Operating temperature	T <sub>opr</sub>	-20	_	65	°C

#### **Circuit Connections**

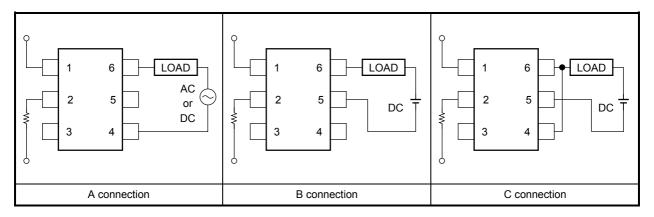

## **Electrical Characteristics (Ta = 25°C)**

Characteristics		Symbol	Test Condition	Min	Тур.	Max	Unit
	Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 10 mA	1.0	1.15	1.3	V
LED	Reverse voltage	I <sub>R</sub>	V <sub>R</sub> = 5 V	_	_	10	μА
	Capacitance	C <sub>T</sub>	V = 0, f = 1 MHz	_	30	_	pF
Detector	Off-state current	l <sub>OFF</sub>	V <sub>OFF</sub> = 60 V	_	_	1	μА
Detector	Capacitance	C <sub>OFF</sub>	V = 0, f = 1 MHz	_	130	_	pF

## **Coupled Electrical Characteristics (Ta = 25°C)**

Characteristics		Symbol	Test Condition	Min	Тур.	Max	Unit
Trigger LED current		I <sub>FT</sub>	I <sub>ON</sub> = 400 mA	_	1.6	3	mA
Return LED current		I <sub>FC</sub>	I <sub>OFF</sub> = 100 μA	0.1	_	_	mA
	A connection	-	$I_{ON} = 400 \text{ mA}, I_{F} = 5 \text{ mA}$	_	1	2	
On-state resistance	B connection		I <sub>ON</sub> = 400 mA, I <sub>F</sub> = 5 mA	_	0.5	1	Ω
	C connection		I <sub>ON</sub> = 800 mA, I <sub>F</sub> = 5 mA		0.25	_	


## Isolation Characteristics (Ta = 25°C)


Characteristics	Symbol	Test Condition	Min	Тур.	Max	Unit
Capacitance input to output	Cs	V <sub>S</sub> = 0 V, f = 1 MHz	_	0.8	_	pF
Isolation resistance	R <sub>S</sub>	V <sub>S</sub> = 500 V, R.H. ≤ 60%	$5\times 10^{10}$	10 <sup>14</sup>	_	Ω
		AC, 1 min	1500	_	_	Vrms
Isolation voltage	BVS	AC, 1 s, in oil	_	3000	_	
		DC, 1 min, in oil	_	3000		Vdc


## **Switching Characteristics (Ta = 25°C)**


Characteristics	Symbol	Test Condition	Min	Тур.	Max	Unit
Turn-on time	t <sub>ON</sub>	$R_L = 200 \Omega$ (Note 2)	_	8.0	2	ms
Turn-off time	toff	$V_{DD} = 20 \text{ V}, I_F = 5 \text{ mA}$		0.1	0.5	1115


Note 2: Switching time test circuit





























5

#### **RESTRICTIONS ON PRODUCT USE**

000707EAC

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes
  are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the
  products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with
  domestic garbage.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.