



# 1 pC Charge Injection, 100 pA Leakage CMOS $\pm 5$ V/5 V/3 V 4-Channel Multiplexer

## ADG604

### FEATURES

- 1 pC Charge Injection (Over the Full Signal Range)
- $\pm 2.7$  V to  $\pm 5.5$  V Dual Supply
- 2.7 V to 5.5 V Single Supply
- Automotive Temperature Range:  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- 100 pA Max @  $25^{\circ}\text{C}$  Leakage Currents
- 85  $\Omega$  Typ On Resistance
- Rail-to-Rail Operation
- Fast Switching Times
- Typical Power Consumption ( $<0.1$   $\mu\text{W}$ )
- TTL/CMOS Compatible Inputs
- 14-Lead TSSOP Package

### APPLICATIONS

- Automatic Test Equipment
- Data Acquisition Systems
- Battery-Powered Instruments
- Communication Systems
- Sample and Hold Systems
- Remote-Powered Equipment
- Audio and Video Signal Routing
- Relay Replacement
- Avionics


### GENERAL DESCRIPTION

The ADG604 is a CMOS analog multiplexer, comprising four single channels. It operates from a dual supply of  $\pm 2.7$  V to  $\pm 5.5$  V, or from a single supply of 2.7 V to 5.5 V.

The ADG604 switches one of four inputs to a common output, D, as determined by the 3-bit binary address lines, A0, A1, and EN. A Logic "0" on the EN pin disables the device.

The ADG604 offers ultralow charge injection of  $\pm 1.5$  pC over the entire signal range and leakage currents of 10 pA typical at  $25^{\circ}\text{C}$ . It offers on resistance of 85  $\Omega$  typ, which is matched to within 2  $\Omega$  between channels. The ADG604 also has low power dissipation yet gives high switching speeds. The ADG604 is available in a 14-lead TSSOP package.

### FUNCTIONAL BLOCK DIAGRAM

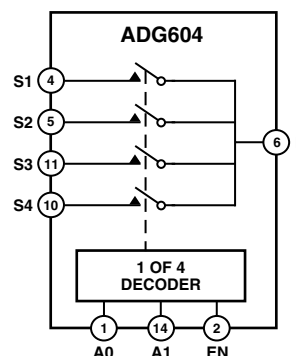

### PRODUCT HIGHLIGHTS

1. Ultralow Charge Injection ( $Q_{\text{INJ}}$ :  $\pm 1.5$  pC Typ over the Full Signal Range)
2. Leakage Current  $<0.5$  nA max @  $85^{\circ}\text{C}$
3. Dual  $\pm 2.7$  V to  $\pm 5.5$  V or Single 2.7 V to 5.5 V Supply
4. Fully Specified to  $125^{\circ}\text{C}$
5. Small 14-Lead TSSOP Package

REV. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.  
Tel: 781/329-4700  
Fax: 781/326-8703  
[www.analog.com](http://www.analog.com)  
© Analog Devices, Inc., 2002

# ADG604—SPECIFICATIONS

## DUAL SUPPLY<sup>1</sup> ( $V_{DD} = +5\text{ V} \pm 10\%$ , $V_{SS} = -5\text{ V} \pm 10\%$ , $GND = 0\text{ V}$ . All specifications $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ unless otherwise noted.)

Parameter	25°C	−40°C to +85°C	−40°C to +125°C	Unit	Test Conditions/Comments
ANALOG SWITCH					
Analog Signal Range			V <sub>SS</sub> to V <sub>DD</sub>	V	V <sub>DD</sub> = +4.5 V, V <sub>SS</sub> = −4.5 V
On Resistance (R <sub>ON</sub> )	85 115	140	160	Ω Typ Ω Max	V <sub>S</sub> = ± 3 V, I <sub>S</sub> = −1 mA, Test Circuit 1
On Resistance Match Between Channels (ΔR <sub>ON</sub> )	2 4	5.5	6.5	Ω Typ Ω Max	V <sub>S</sub> = ± 3 V, I <sub>S</sub> = −1 mA
On-Resistance Flatness (R <sub>FLAT(ON)</sub> )	25 40	55	60	Ω Typ Ω Max	V <sub>S</sub> = ± 3 V, I <sub>S</sub> = −1 mA
LEAKAGE CURRENTS					
Source OFF Leakage I <sub>S</sub> (OFF)	±0.01 ±0.1	±0.25	±4	nA Typ nA Max	V <sub>DD</sub> = +5.5 V, V <sub>SS</sub> = −5.5 V V <sub>S</sub> = ±4.5 V, V <sub>D</sub> = ∓4.5 V, Test Circuit 2
Drain OFF Leakage I <sub>D</sub> (OFF)	±0.01 ±0.1	±0.5	±8	nA Typ nA Max	V <sub>S</sub> = ±4.5 V, V <sub>D</sub> = ∓4.5 V, Test Circuit 2
Channel ON Leakage I <sub>D</sub> , I <sub>S</sub> (ON)	±0.01 ±0.1	±0.5	±10	nA Typ nA Max	V <sub>S</sub> = V <sub>D</sub> = ±4.5 V, Test Circuit 3
DIGITAL INPUTS					
Input High Voltage, V <sub>INH</sub>			2.4	V Min	V <sub>IN</sub> = V <sub>INL</sub> or V <sub>INH</sub>
Input Low Voltage, V <sub>INL</sub>			0.8	V Max	
Input Current I <sub>INL</sub> or I <sub>INH</sub>	0.005		±0.1	μA Typ μA Max	
C <sub>IN</sub> , Digital Input Capacitance	2			pF Typ	
DYNAMIC CHARACTERISTICS <sup>2</sup>					
Transition Time	70 100	120	150	ns Typ ns Max	V <sub>S1</sub> = +3 V, V <sub>S4</sub> = −3 V, R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF, Test Circuit 4
t <sub>ON</sub> Enable	80 105	130	150	ns Typ ns Max	R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF V <sub>S</sub> = 3 V, Test Circuit 6
t <sub>OFF</sub> Enable	30 45	55	65	ns Typ ns Max	R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF V <sub>S</sub> = 3 V, Test Circuit 6
Break-Before-Make Time Delay, t <sub>BBM</sub>	20		10	ns Typ ns Min	R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF, V <sub>S1</sub> = V <sub>S2</sub> = 3 V, Test Circuit 5
Charge Injection	−1			pC Typ	V <sub>S</sub> = 0 V, R <sub>S</sub> = 0 Ω, C <sub>L</sub> = 1nF, Test Circuit 7
Off Isolation	−75			dB Typ	R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF, f = 10 MHz, Test Circuit 8
Channel-to-Channel Crosstalk	−70			dB Typ	R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF, f = 10 MHz, Test Circuit 10
Bandwidth −3 dB	280			MHz Typ	R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF, Test Circuit 9
C <sub>S</sub> (OFF)	5			pF Typ	f = 1 MHz
C <sub>D</sub> (OFF)	17			pF Typ	f = 1 MHz
C <sub>D</sub> , C <sub>S</sub> (ON)	18			pF Typ	f = 1 MHz
POWER REQUIREMENTS					
I <sub>DD</sub>	0.001		1.0	μA Typ μA Max	V <sub>DD</sub> = +5.5 V, V <sub>SS</sub> = −5.5 V Digital Inputs = 0 V or 5.5 V
I <sub>SS</sub>	0.001		1.0	μA Typ μA Max	Digital Inputs = 0 V or 5.5 V

### NOTES

<sup>1</sup>Y Version Temperature Range:  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$

<sup>2</sup>Guaranteed by design, not subject to production test.

Specifications subject to change without notice.

# SINGLE SUPPLY<sup>1</sup> ( $V_{DD} = 5\text{ V} \pm 10\%$ , $V_{SS} = 0\text{ V}$ , $GND = 0\text{ V}$ . All specifications $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ unless otherwise noted.)

Parameter	25°C	−40°C to +85°C	−40°C to +125°C	Unit	Test Conditions/Comments	
ANALOG SWITCH						
Analog Signal Range			0 V to V <sub>DD</sub>	V	V <sub>DD</sub> = 4.5 V, V <sub>SS</sub> = 0 V V <sub>S</sub> = 3.5 V, I <sub>S</sub> = −1 mA, Test Circuit 1	
On Resistance (R <sub>ON</sub> )	210 290	350	380	Ω Typ Ω Max		
On Resistance Match Between Channels (ΔR <sub>ON</sub> )	3	12	13	Ω Typ Ω Max		
LEAKAGE CURRENTS						
Source OFF Leakage I <sub>S</sub> (OFF)	±0.01 ±0.1	±0.25	±4	nA Typ nA Max	V <sub>DD</sub> = 5.5 V V <sub>S</sub> = 1 V/4.5 V, V <sub>D</sub> = 4.5 V/1 V, Test Circuit 2 V <sub>S</sub> = 1 V/4.5 V, V <sub>D</sub> = 4.5 V/1 V, Test Circuit 2 V <sub>S</sub> = V <sub>D</sub> = 4.5 V/1 V, Test Circuit 3	
Drain OFF Leakage I <sub>D</sub> (OFF)	±0.01 ±0.1	±0.5	±8	nA Typ nA Max		
Channel ON Leakage I <sub>D</sub> , I <sub>S</sub> (ON)	±0.01 ±0.1	±0.5	10	nA Typ nA Max		
DIGITAL INPUTS						
Input High Voltage, V <sub>INH</sub>			2.4	V Min	V <sub>IN</sub> = V <sub>INL</sub> or V <sub>INH</sub>	
Input Low Voltage, V <sub>INL</sub>			0.8	V Max		
Input Current I <sub>INL</sub> or I <sub>INH</sub>	0.005		±0.1	μA Typ μA Max		
				pF Typ		
C <sub>IN</sub> , Digital Input Capacitance	2					
DYNAMIC CHARACTERISTICS <sup>2</sup>						
Transition Time	90 150	185	210	ns Typ ns Max	V <sub>S1</sub> = 3 V, V <sub>S4</sub> = 0 V, R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF, Test Circuit 4 R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF V <sub>S</sub> = 3 V, Test Circuit 6 R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF V <sub>S</sub> = 3 V, Test Circuit 6 R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF, V <sub>S1</sub> = V <sub>S2</sub> = 3 V, Test Circuit 5 V <sub>S</sub> = 0 V , R <sub>S</sub> = 0 Ω, C <sub>L</sub> = 1 nF, Test Circuit 7 R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF, f = 10 MHz, Test Circuit 8 R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF, f = 10 MHz, Test Circuit 10 R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF, Test Circuit 9 f = 1 MHz f = 1 MHz f = 1 MHz	
t <sub>ON</sub> Enable	105 150	190	220	ns Typ ns Max		
t <sub>OFF</sub> Enable	45 70	80	90	ns Typ ns Max		
Break-Before-Make Time Delay, t <sub>BBM</sub>	30		10	ns Typ ns Min		
Charge Injection	0.3			pC Typ		
Off Isolation	−65			dB Typ		
Channel-to-Channel Crosstalk	−70			dB Typ		
Bandwidth −3 dB	250			MHz Typ		
C <sub>S</sub> (OFF)	5			pF Typ		
C <sub>D</sub> (OFF)	17			pF Typ		
C <sub>D</sub> , C <sub>S</sub> (ON)	18			pF Typ		
POWER REQUIREMENTS						
I <sub>DD</sub>	0.001		1.0	μA Typ μA Max		

## NOTES

<sup>1</sup>Y Version Temperature Range:  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ <sup>2</sup>Guaranteed by design, not subject to production test.

Specifications subject to change without notice.

# ADG604—SPECIFICATIONS

## SINGLE SUPPLY<sup>1</sup>

( $V_{DD} = 3\text{ V} \pm 10\%$ ,  $V_{SS} = 0\text{ V}$ ,  $GND = 0\text{ V}$ . All specifications  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  unless otherwise noted.)

Parameter	25°C	-40°C to +85°C	-40°C to +125°C	Unit	Test Conditions/Comments
<b>ANALOG SWITCH</b>					
Analog Signal Range			0 V to $V_{DD}$	V	
On Resistance ( $R_{ON}$ )	380	420	460	$\Omega$ Typ	$V_{DD} = 2.7\text{ V}$ , $V_{SS} = 0\text{ V}$ $V_S = 1.5\text{ V}$ , $I_S = -1\text{ mA}$ , Test Circuit 1
On Resistance Match Between Channels ( $\Delta R_{ON}$ )			5	$\Omega$ Typ	$V_S = 1.5\text{ V}$ , $I_S = -1\text{ mA}$
<b>LEAKAGE CURRENTS</b>					
Source OFF Leakage $I_S$ (OFF)	$\pm 0.01$ $\pm 0.1$	$\pm 0.25$	$\pm 4$	nA Typ nA Max	$V_{DD} = 3.3\text{ V}$ $V_S = 1\text{ V}/3\text{ V}$ , $V_D = 3\text{ V}/1\text{ V}$ , Test Circuit 2
Drain OFF Leakage $I_D$ (OFF)	$\pm 0.01$ $\pm 0.1$	$\pm 0.5$	$\pm 8$	nA Typ nA Max	$V_S = 1\text{ V}/3\text{ V}$ , $V_D = 3\text{ V}/1\text{ V}$ , Test Circuit 2
Channel ON Leakage $I_D$ , $I_S$ (ON)	$\pm 0.01$ $\pm 0.1$	$\pm 0.5$	$\pm 10$	nA Typ nA Max	$V_S = V_D = 1\text{ V}/3\text{ V}$ , Test Circuit 3
<b>DIGITAL INPUTS</b>					
Input High Voltage, $V_{INH}$			2.0	V Min	
Input Low Voltage, $V_{INL}$			0.8	V Max	
Input Current $I_{INL}$ or $I_{INH}$	0.005		$\pm 0.1$	$\mu\text{A}$ Typ $\mu\text{A}$ Max	$V_{IN} = V_{INL}$ or $V_{INH}$
$C_{IN}$ , Digital Input Capacitance	2			pF Typ	
<b>DYNAMIC CHARACTERISTICS<sup>2</sup></b>					
Transition Time	170 320		450	ns Typ ns Max	$V_{S1} = 2\text{ V}$ , $V_{S4} = 0\text{ V}$ , $R_L = 300\ \Omega$ , $C_L = 35\text{ pF}$ , Test Circuit 4
$t_{ON}$ Enable	180 250	390	450	ns Typ ns Max	$R_L = 300\ \Omega$ , $C_L = 35\text{ pF}$ $V_S = 2\text{ V}$ , Test Circuit 6
$t_{OFF}$ Enable	100 160	265	390	ns Typ ns Max	$R_L = 300\ \Omega$ , $C_L = 35\text{ pF}$ $V_S = 2\text{ V}$ , Test Circuit 6
Break-Before-Make Time Delay, $t_{BBM}$	100	205	225	ns Typ ns Min	$R_L = 300\ \Omega$ , $C_L = 35\text{ pF}$ , $V_{S1} = V_{S2} = 2\text{ V}$ , Test Circuit 5
Charge Injection	0.3		10	pC Typ	$V_S = 0\text{ V}$ to $3.3\text{ V}$ , $R_S = 0\ \Omega$ , $C_L = 1\ \mu\text{F}$ , Test Circuit 7
Off Isolation	-65			dB Typ	$R_L = 50\ \Omega$ , $C_L = 5\text{ pF}$ , $f = 10\text{ MHz}$ , Test Circuit 8
Channel-to-Channel Crosstalk	70			dB Typ	$R_L = 50\ \Omega$ , $C_L = 5\text{ pF}$ , $f = 10\text{ MHz}$ , Test Circuit 10
Bandwidth -3 dB	250			MHz Typ	$R_L = 50\ \Omega$ , $C_L = 5\text{ pF}$ , Test Circuit 9
$C_S$ (OFF)	5			pF Typ	$f = 1\text{ MHz}$
$C_D$ (OFF)	17			pF Typ	$f = 1\text{ MHz}$
$C_D$ , $C_S$ (ON)	18			pF Typ	$f = 1\text{ MHz}$
<b>POWER REQUIREMENTS</b>					
$I_{DD}$	0.001		1.0	$\mu\text{A}$ Typ $\mu\text{A}$ Max	$V_{DD} = 3.3\text{ V}$ Digital Inputs = 0 V or 3.3 V

### NOTES

<sup>1</sup>Y Version Temperature Range:  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$

<sup>2</sup>Guaranteed by design, not subject to production test.

Specifications subject to change without notice.

## ABSOLUTE MAXIMUM RATINGS<sup>1</sup>

(T<sub>A</sub> = 25°C unless otherwise noted)

V <sub>DD</sub> to V <sub>SS</sub>	13 V
V <sub>DD</sub> to GND	−0.3 V to +6.5 V
V <sub>SS</sub> to GND	+0.3 V to −6.5 V
Analog Inputs <sup>2</sup>	V <sub>SS</sub> −0.3 V to V <sub>DD</sub> + 0.3 V
Digital Inputs <sup>2</sup>	−0.3 V to V <sub>DD</sub> + 0.3 V or 30 mA, Whichever Occurs First
Peak Current, S or D (Pulsed at 1 ms, 10% Duty Cycle Max)	20 mA
Continuous Current, S or D	10 mA
Operating Temperature Range	
Automotive (Y Version)	−40°C to +125°C
Storage Temperature Range	−65°C to +150°C

Junction Temperature	150°C
TSSOP Package	
θ <sub>JA</sub> Thermal Impedance	150°C/W
θ <sub>JC</sub> Thermal Impedance	27°C/W
Lead Temperature, Soldering (10 seconds)	300°C
IR Reflow, Peak Temperature	220°C

## NOTES

<sup>1</sup>Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those listed in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Only one absolute maximum rating may be applied at any one time.

<sup>2</sup>Overvoltages at EN, A0, A1, S, or D will be clamped by internal diodes. Current should be limited to the maximum ratings given.

## ORDERING GUIDE

Model Option	Temperature Range	Package Description	Package
ADG604YRU	−40°C to +125°C	Thin Shrink Small Outline (TSSOP)	RU-14

## PIN CONFIGURATION

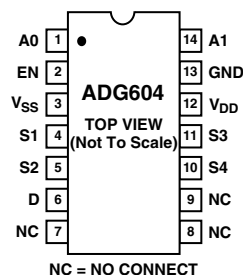


Table I. Truth Table

A1	A0	EN	ON Switch
X	X	0	None
0	0	1	1
0	1	1	2
1	0	1	3
1	1	1	4

## CAUTION


ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although the ADG604 features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high-energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.




## TERMINOLOGY

$V_{DD}$	Most Positive Power Supply Potential
$V_{SS}$	Most Negative Power Supply in a Dual Supply Application. In single supply applications, this should be tied to ground at the device.
GND	Ground (0 V) Reference
$I_{DD}$	Positive Supply Current
$I_{SS}$	Negative Supply Current
S	Source Terminal. May be an input or output.
D	Drain Terminal. May be an input or output.
$R_{ON}$	Ohmic Resistance between D and S
$\Delta R_{ON}$	On Resistance Match between any two channels, i.e., $R_{ON} \text{ Max} - R_{ON} \text{ Min}$
$R_{FLAT(ON)}$	Flatness is defined as the difference between the maximum and minimum value of On resistance as measured over the specified analog signal range.
$I_S$ (OFF)	Source Leakage Current with the Switch “OFF”
$I_D$ (OFF)	Drain Leakage Current with the Switch “OFF”
$I_D, I_S$ (ON)	Channel Leakage Current with the Switch “ON”
$V_D, V_S$	Analog Voltage on Terminals D, S
$V_{INL}$	Maximum Input Voltage for Logic “0”
$V_{INH}$	Minimum Input Voltage for Logic “1”
$I_{INL} (I_{INH})$	Input Current of the Digital Input
$C_S$ (OFF)	Channel Input Capacitance for “OFF” Condition
$C_D$ (OFF)	Channel Output Capacitance for “OFF” Condition
$C_D, C_S$ (ON)	“On” Switch Capacitance
$C_{IN}$	Digital Input Capacitance
$t_{ON} (EN)$	Delay time between the 50% and 90% points of the digital input and switch “ON” condition.
$t_{OFF} (EN)$	Delay time between the 50% and 90% points of the digital input and switch “OFF” condition.
$t_{TRANSITION}$	Delay time between the 50% and 90% points of the digital input and switch “ON” condition when switching from one address state to another.
$t_{BBM}$	“OFF” time or “ON” time measured between the 80% points of both switches, when switching from one address state to another.
Charge Injection	A measure of the glitch impulse transferred from the digital input to the analog output during switching.
Crosstalk	A measure of unwanted signal that is coupled through from one channel to another as a result of parasitic capacitance.
Off Isolation	A measure of unwanted signal coupling through an “On” switch.
Bandwidth	Frequency Response of the “On” Switch
Insertion Loss	Loss Due to the On Resistance of the Switch


# Typical Performance Characteristics—ADG604

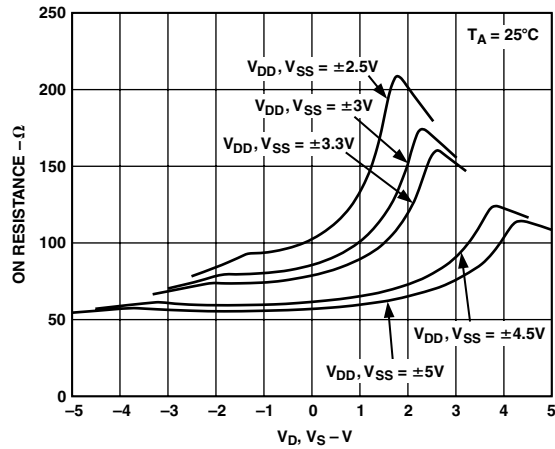


TPC 1. On Resistance vs.  $V_D$  ( $V_S$ ), Dual Supply

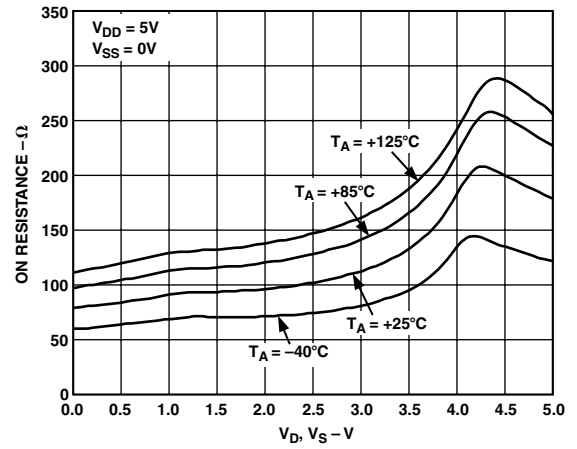


TPC 4. On Resistance vs.  $V_D$  ( $V_S$ ) for Different Temperatures, Single Supply

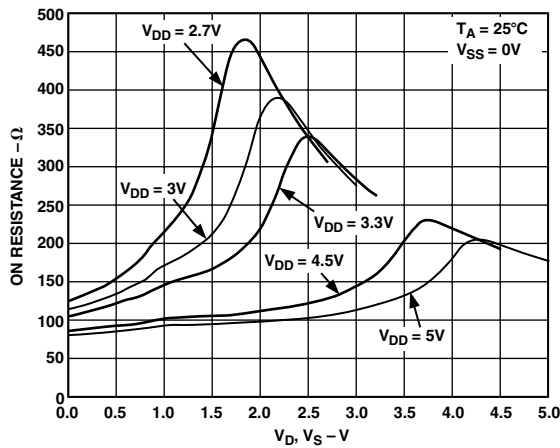


TPC 2. On Resistance vs.  $V_D$  ( $V_S$ ), Single Supply

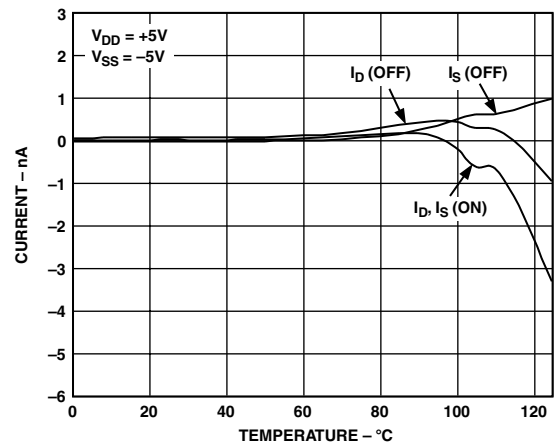

TPC 5. Leakage Currents vs. Temperature, Dual Supply

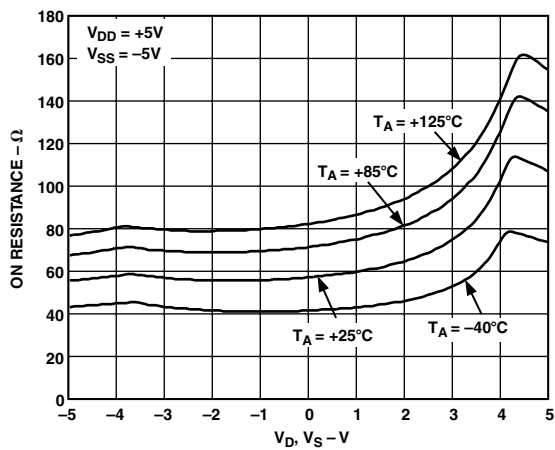


TPC 3. On Resistance vs.  $V_D$  ( $V_S$ ) for Different Temperatures, Dual Supply

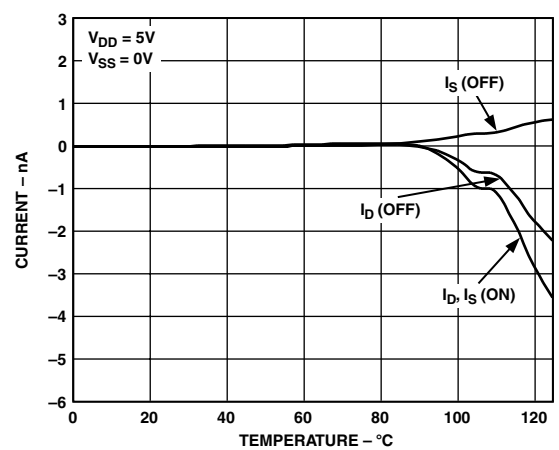


TPC 6. Leakage Currents vs. Temperature, Single Supply


# ADG604

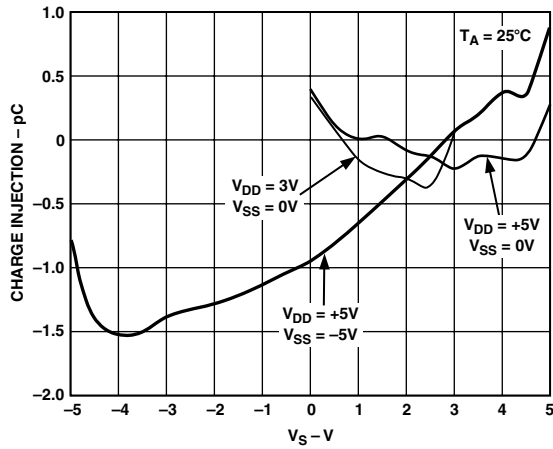


TPC 7. Charge Injection vs. Source Voltage

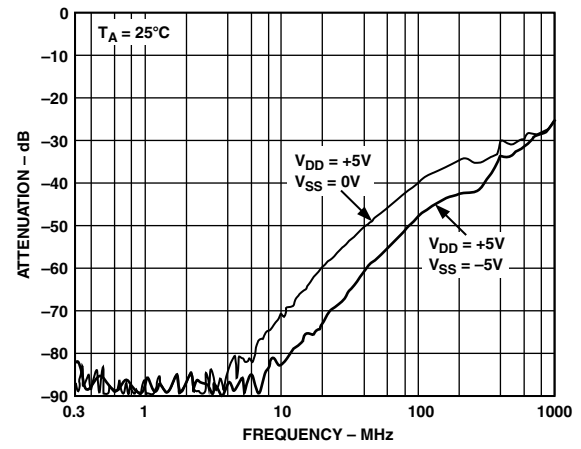


TPC 10. Crosstalk vs. Frequency

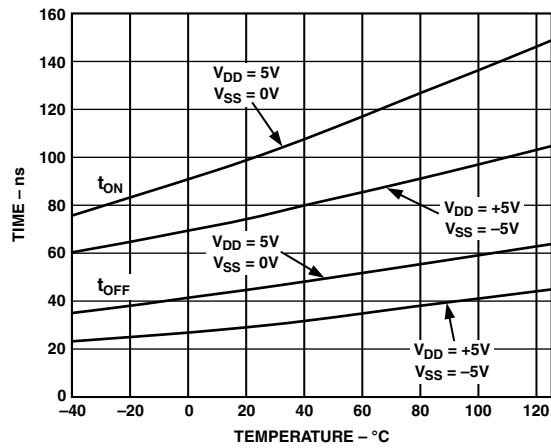

TPC 8.  $t_{ON}/t_{OFF}$  Times vs. Temperature

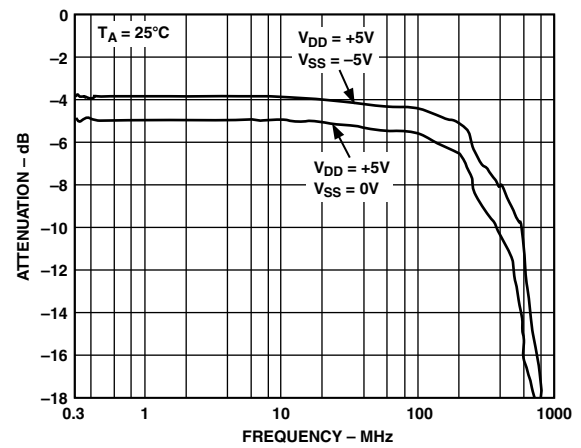


TPC 11. On Response vs. Frequency

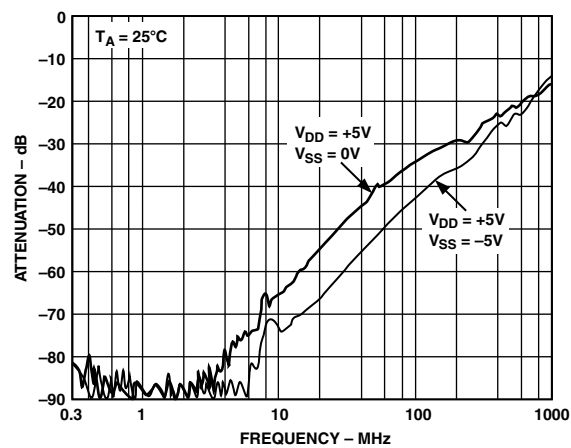


TPC 9. Off Isolation vs. Frequency




# Test Circuits

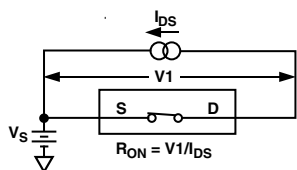


Test Circuit 1. On Resistance




Test Circuit 2. Off Leakage




Test Circuit 3. On Leakage

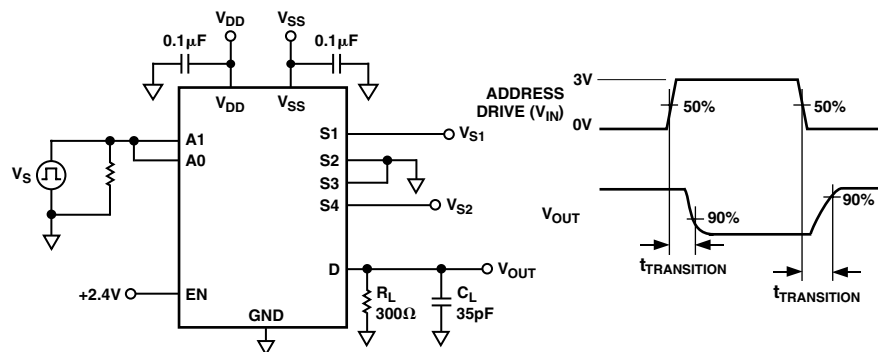



Test Circuit 4. Switching Time of Multiplexer,  $t_{\text{TRANSITION}}$

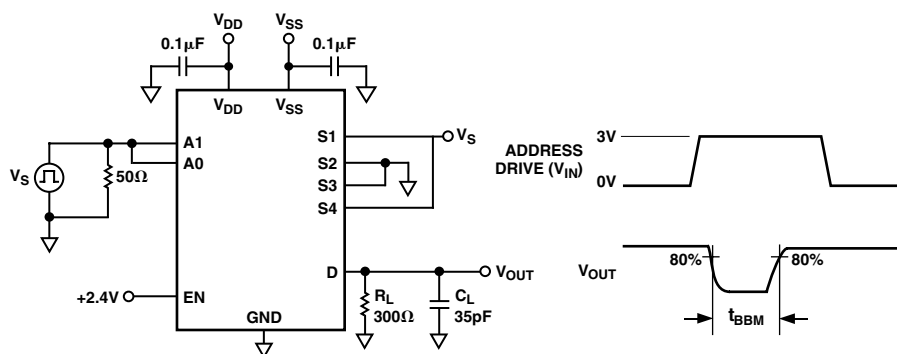


Test Circuit 5. Break-Before-Make Delay,  $t_{\text{BBM}}$

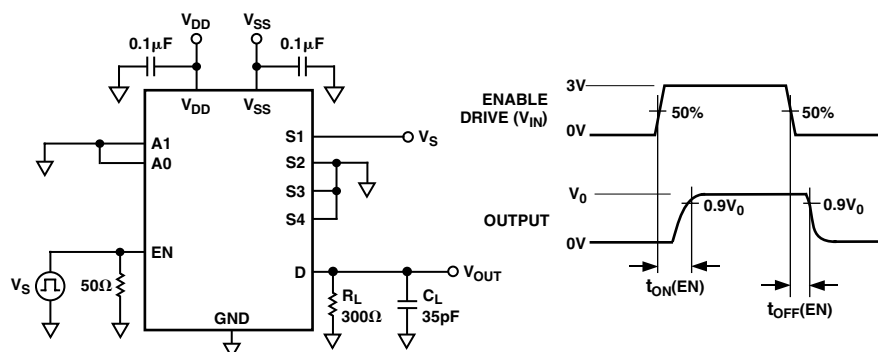


Test Circuit 6. Enable Delay,  $t_{\text{ON}}(\text{EN})$ ,  $t_{\text{OFF}}(\text{EN})$

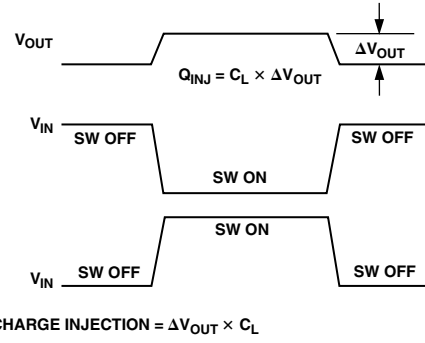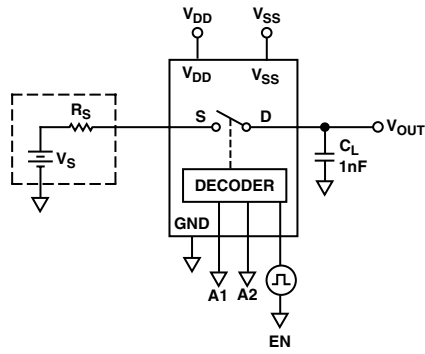


Test Circuit 7. Charge Injection

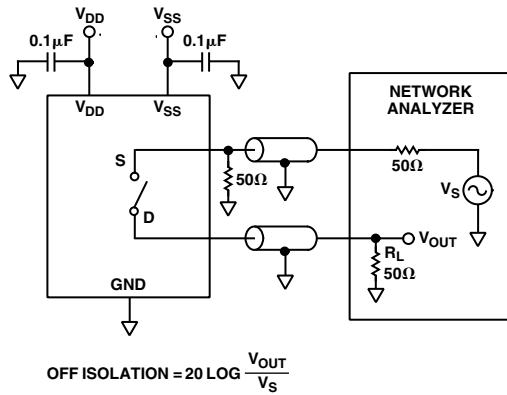

Test Circuit 8. Off Isolation

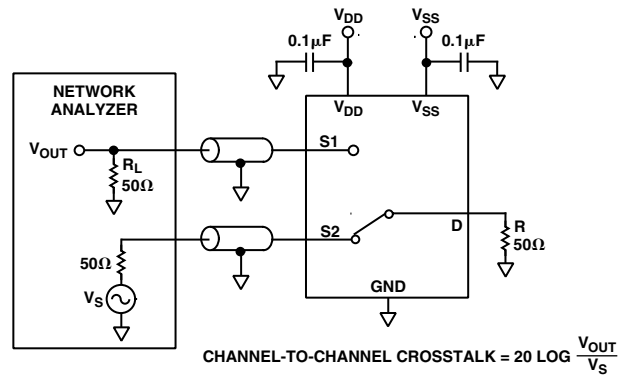

Test Circuit 10. Channel-to-Channel Crosstalk

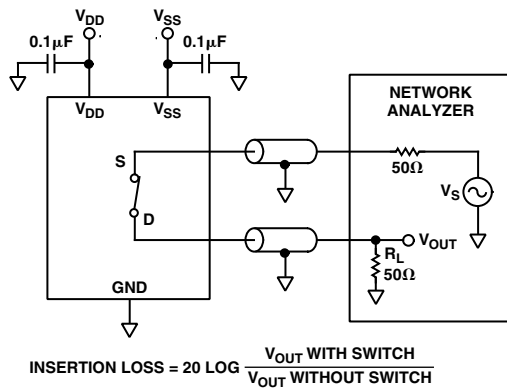

Test Circuit 9. Bandwidth

**OUTLINE DIMENSIONS**

Dimensions shown in inches and (mm).

**14-Lead TSSOP Package  
(RU-14)**