


Low Profile Broadband VHF/UHF Antenna

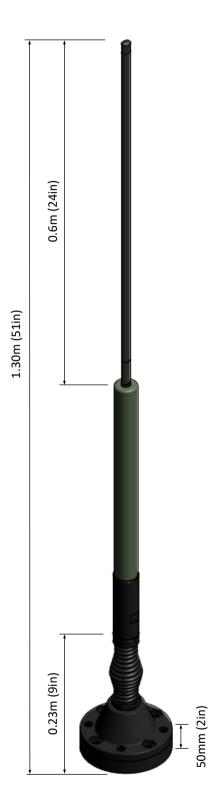

Standard (non-GPS)
Base Shown

Features:

- Low profile design
- 30-512MHz
- Single connector VHF/UHF
- Designed for operation on all kinds of vehicles including armored vehicles
- Suitable for operation on shelters and to be mounted on masts or in other permanent installations.
- Rugged high quality antenna with a durable construction
- NATO 4-hole flange base with spring.
- Flexible blade at the top of the whip
- Requires a ground plane
- L1/L2 GPS base option available

Electrical specifications:

Frequency range	VHF/UHF: 30-512MHz		
VSWR	VHF/UHF: < 3.5:1 (see graph)		
Nominal impedance	50Ω		
Power rating	VHF/UHF: 75W		
Gain	VHF/UHF: -13 to -1dBi (see graph)		
Radiation pattern	Omni-directional within ±0.5dB		
Polarization	Vertical		
Connector	BNC female* (others on request)		

Mechanical specifications:

Design	VHF/UHF End feed monopole. Radiating elements completely enclosed in epoxy/ fiberglass laminate. Metal parts are brass, stainless steel and aluminum	
Length *	1.3m (51in)	
Weight *	Whip: 1.3kg (2.9lbs) Base: 2.6kg (5.7lbs)	
Wind rating	55m/s (125mph)	
Finish	Polyurethane lacquer	
Temperature range	-55°C to +71°C, -67°F to +160°F	

^{*} Standard base version

GPS Electrical Specification (option)

Configuration	L1 GPS		L1/L2 GPS
Frequency Band	1575.42 ± 10 MHz	L1	1575.42 ± 10 MHz
		L2	1227.60 ± 10 MHz
Supply Voltage	2.7-5.5V		2.7-5.5V
Pre-amplifier	26.5 dB @ 5V	26.5 dB @ 5V	
Noise Figure	2.5dB	2.5dB	
Supply Current	< 40mA	< 60mA	
Polarisation	RHCP	RHCP	
Connector	SMA female	SMA female	

Antenna Base Options

Bases are available with optional L1 & L1/L2 GPS. All bases are supplied with a protective top cap.



NATO 4-hole Spring 4 x M10 or 3/8" Bolts on 114mm PCD Base diameter 140mm (5.5in) Base height 240mm (9.5in)




NATO 4-hole Spring GPS 4 x M10 or 3/8" Bolts on 114mm PCD Base diameter 140mm (5.5in) Base height 280mm (11in)




CEF connection (top of the base)

Gain & VSWR Curves

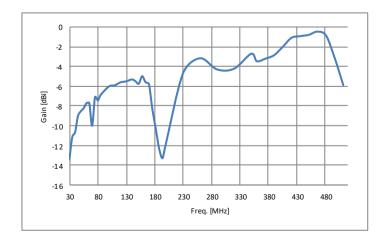

Typical gain curve mounted in the centre of a 1.2m x 1.2m ground plane

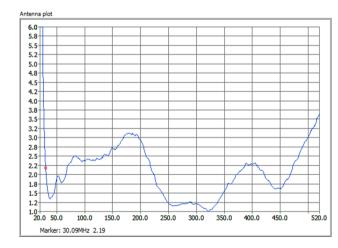

Typical VSWR, mounted on corner of 3 x 3m ground plane