


**IRF 620/FI-621/FI
IRF 622/FI-623/FI**

S G S - THOMSON

**N - CHANNEL ENHANCEMENT MODE
POWER MOS TRANSISTORS**

TYPE	V _{DSS}	R _{DS(on)}	I _D ■
IRF620	200 V	0.8 Ω	5 A
IRF620FI	200 V	0.8 Ω	4 A
IRF621	150 V	0.8 Ω	5 A
IRF621FI	150 V	0.8 Ω	4 A
IRF622	200 V	1.2 Ω	4 A
IRF622FI	200 V	1.2 Ω	3.5 A
IRF623	150 V	1.2 Ω	4 A
IRF623FI	150 V	1.2 Ω	3.5 A

- 200V FOR TELECOMMUNICATION APPLICATIONS
- ULTRA FAST SWITCHING
- RATED FOR UNCLAMPED INDUCTIVE SWITCHING (ENERGY TEST) ♦
- EASY DRIVE - REDUCES COST AND SIZE


INDUSTRIAL APPLICATIONS:

- SWITCHING MODE POWER SUPPLIES
- DC SWITCH
- ROBOTICS


N - channel enhancement mode POWER MOS field effect transistors. Easy drive and very fast switching times make these POWER MOS transistors ideal for high speed switching applications. Typical uses are in telecommunications, robotics, switching power supplies and as a DC switch.

ABSOLUTE MAXIMUM RATINGS


	TO-220 ISOWATT220	IRF			
		620 620FI	621 621FI	622 622FI	623 623FI
V _{DS} *	Drain-source voltage (V _{GS} = 0)	200	150	200	150
V _{DGR} *	Drain-gate voltage (R _{GS} = 20 kΩ)	200	150	200	150
V _{GS}	Gate-source voltage			±20	
I _{DM} (*)	Drain current (pulsed)	20	20	16	16
I _D	Drain current (cont.) at T _c = 25°C	620	621	622	623
I _D	Drain current (cont.) at T _c = 100°C	5	5	4	4
I _D ■	Drain current (cont.) at T _c = 25°C	3	3	2.5	2.5
I _D ■	Drain current (cont.) at T _c = 100°C	620FI	621FI	622FI	623FI
P _{tot}	Total dissipation at T _c < 25°C	4	4	3.5	3.5
T _{stg}	Derating factor	2.5	2.5	2	2
T _j	Storage temperature				
	Max. operating junction temperature				
TO-220		ISOWATT220			
		40		30	
		0.32		0.24	
				– 55 to 150	
				150	
♦	T _j = 25°C to 125°C				W
(*)	Repetitive Rating: Pulse width limited by max junction temperature.				W/°C
■	See note on ISOWATT220 on this datasheet.				°C
♦	Introduced in 1988 week 44				°C



TO-220



ISOWATT220

**INTERNAL SCHEMATIC
DIAGRAM**


30E D ■ 7929237 0029784 3 ■

T-39-11

THERMAL DATA

TO-220 ISOWATT220

R_{thj} - case	Thermal resistance junction-case	max	3.12	4.16	$^{\circ}\text{C}/\text{W}$
R_{thc-s}	Thermal resistance case-sink	typ	0.5	$^{\circ}\text{C}/\text{W}$	$^{\circ}\text{C}/\text{W}$
$R_{thj-amb}$	Thermal resistance junction-ambient	max	80	$^{\circ}\text{C}/\text{W}$	$^{\circ}\text{C}/\text{W}$
T_J	Maximum lead temperature for soldering purpose		300		$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}\text{C}$ unless otherwise specified)

Parameters	Test Conditions	Min.	Typ.	Max.	Unit
------------	-----------------	------	------	------	------

OFF

$V_{(BR)DSS}$	Drain-source breakdown voltage	$I_D = 250 \mu\text{A}$ $V_{GS} = 0$ for IRF620/622/620FI/622FI for IRF621/623/621FI/623FI	200			V
I_{DSS}	Zero gate voltage drain current ($V_{GS} = 0$)	$V_{DS} = \text{Max Rating}$ $V_{DS} = \text{Max Rating} \times 0.8$ $T_c = 125^{\circ}\text{C}$			250 1000	μA μA
I_{GSS}	Gate-body leakage current ($V_{DS} = 0$)	$V_{GS} = \pm 20 \text{ V}$			±500	nA

ON **

$V_{GS(\text{th})}$	Gate threshold voltage	$V_{DS} = V_{GS}$	$I_D = 250 \mu\text{A}$	2		4	V
$I_{D(on)}$	On-state drain current	$V_{DS} > I_{D(on)} \times R_{DS(\text{on}) \text{ max}}$	$V_{GS} = 10 \text{ V}$ for IRF620/621/620FI/621FI for IRF622/623/622FI/623FI	5			A
$R_{DS(\text{on})}$	Static drain-source on resistance	$V_{GS} = 10 \text{ V}$	$I_D = 2.5 \text{ A}$ for IRF620/621/620FI/621FI for IRF622/623/622FI/623FI			0.8 1.2	Ω Ω

ENERGY TEST

I_{UIS}	Unclamped inductive switching current (single pulse)	$V_{DD} = 30 \text{ V}$ starting $T_j = 25^{\circ}\text{C}$ for IRF620/621/620FI/621FI for IRF622/623/622FI/623FI	5			A
-----------	--	--	---	--	--	---

DYNAMIC

G_{fs}^{**}	Forward transconductance	$V_{DS} > I_{D(on)} \times R_{DS(\text{on}) \text{ max}}$ $I_D = 2.5 \text{ A}$	1.3			mho
C_{iss} C_{oss} C_{rss}	Input capacitance Output capacitance Reverse transfer capacitance	$V_{DS} = 25 \text{ V}$ $V_{GS} = 0$			600 300 80	pF pF pF

30E D ■ 7929237 0029785 5 ■

ELECTRICAL CHARACTERISTICS (Continued)

T-39-11

Parameters	Test Conditions	Min.	Typ.	Max.	Unit
SWITCHING					
t_d (on)	Turn-on time			40	ns
t_r	Rise time			60	ns
t_d (off)	Turn-off delay time	$V_{DD} = 75 \text{ V}$	$I_D = 2.5 \text{ A}$	100	ns
t_f	Fall time	$R_L = 50 \Omega$	(see test circuit)	60	ns
Q_g	Total Gate Charge	$V_{GS} = 10 \text{ V}$	$I_D = 6 \text{ A}$	15	nC
		$V_{DS} = \text{Max Rating} \times 0.8$	(see test circuit)		




SOURCE DRAIN DIODE

I_{SD}	Source-drain current			5	A
I_{SDM} (*)	Source-drain current (pulsed)			20	A
V_{SD}^{**}	Forward on voltage	for IRF620/621/620FI/621FI $I_{SD} = 5 \text{ A}$ $V_{GS} = 0$ for IRF622/623/622FI/623FI $I_{SD} = 4 \text{ A}$ $V_{GS} = 0$		1.8	V
t_{rr}	Reverse recovery time			1.4	V
Q_{rr}	Reverse recovered charge	$I_{SD} = 5 \text{ A}$ $dI/dt = 100 \text{ A}/\mu\text{s}$	350		ns
			2.3		μC

** Pulsed: Pulse duration $\leq 300 \mu\text{s}$, duty cycle $\leq 1.5\%$

(*) Repetitive Rating: Pulse width limited by max junction temperature


■ See note on ISOWATT220 in this datasheet

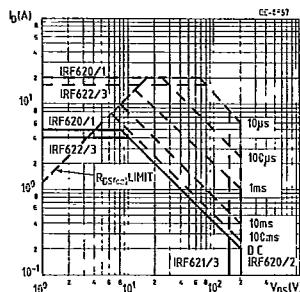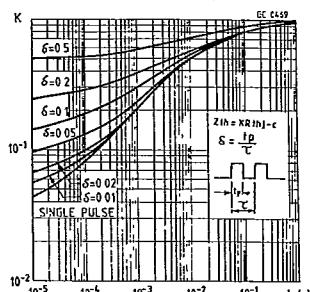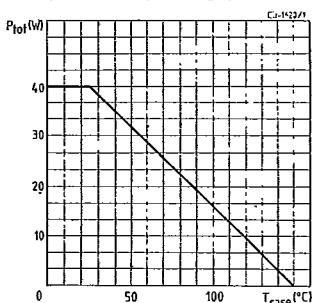Safe operating areas
(standard package)Thermal impedance
(standard package)Derating curve
(standard package)


30E D ■ 7929237 0029786 7 ■

T-39-11


Output characteristics

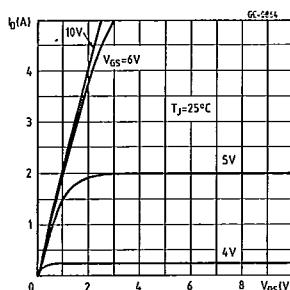


Output characteristics

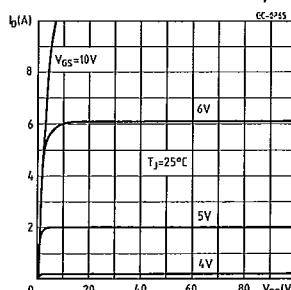


Transfer characteristics

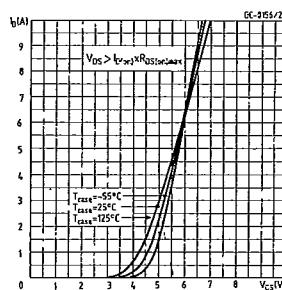


Transconductance

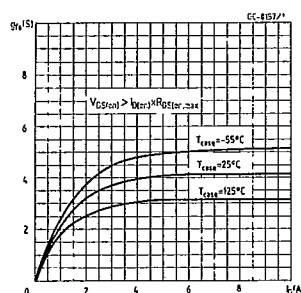


Static drain-source on resistance

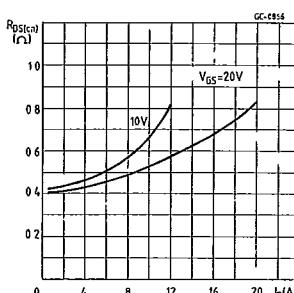


Maximum drain current vs temperature

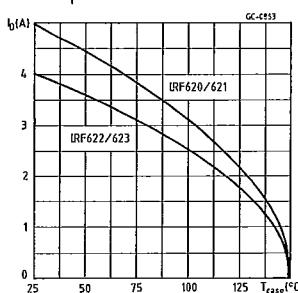


Gate charge vs gate-source voltage

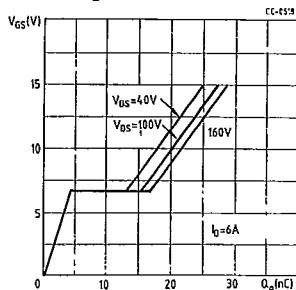

Capacitance variation

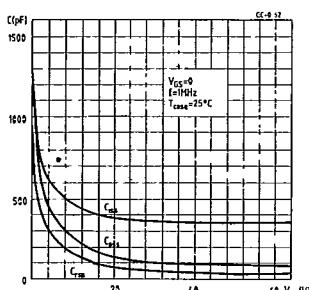



Normalized breakdown voltage vs temperature

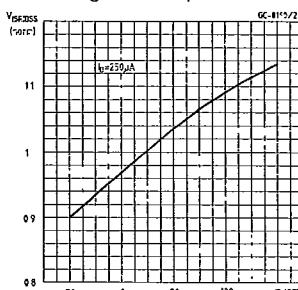


30E D

7929237 0029787 9

T-39-11

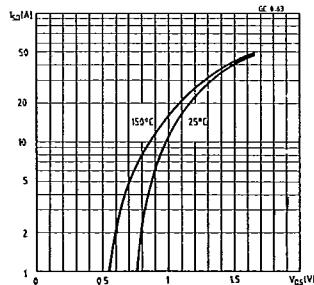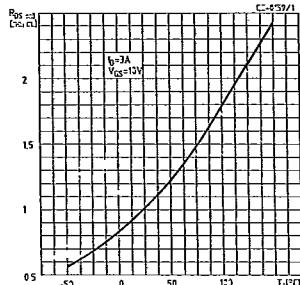
Normalized on resistance
vs temperatureSource-drain diode forward
characteristics

Unclamped inductive test circuit

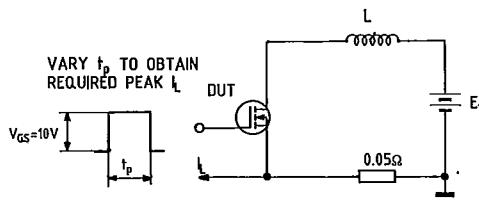


SC-0339

Unclamped inductive waveforms

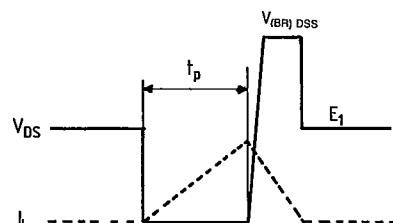


SC-0338

Switching times test circuit

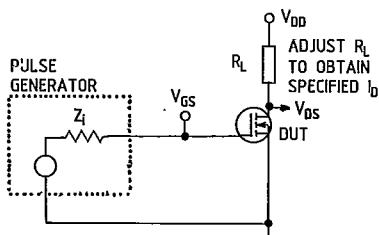

SC-0246

Gate charge test circuit

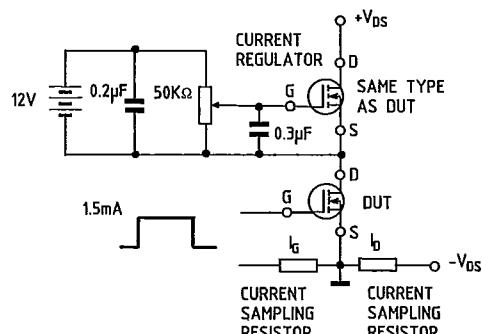

SC-0244

ISOWATT220 PACKAGE CHARACTERISTICS AND APPLICATION.

ISOWATT220 is fully isolated to 2000V dc. Its thermal impedance, given in the data sheet, is optimised to give efficient thermal conduction together with excellent electrical isolation.

The structure of the case ensures optimum distances between the pins and heatsink. The ISOWATT220 package eliminates the need for external isolation so reducing fixing hardware. Accurate moulding techniques used in manufacture assure consistent heat spreader-to-heatsink capacitance.

ISOWATT220 thermal performance is better than that of the standard part, mounted with a 0.1mm mica washer. The thermally conductive plastic has a higher breakdown rating and is less fragile than mica or plastic sheets. Power derating for ISOWATT220 packages is determined by:


$$P_D = \frac{T_J - T_C}{R_{th}}$$

from this I_{Dmax} for the POWER MOS can be calculated:


$$I_{Dmax} \leq \sqrt{\frac{P_D}{R_{DS(on)} \text{ (at } 150^\circ\text{C)}}}$$

ISOWATT DATA


Safe operating areas

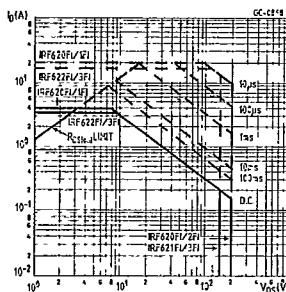

Thermal impedance

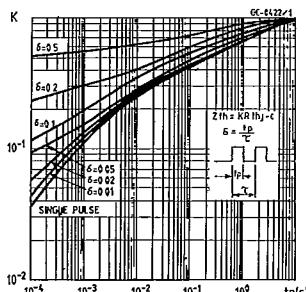

Derating curve

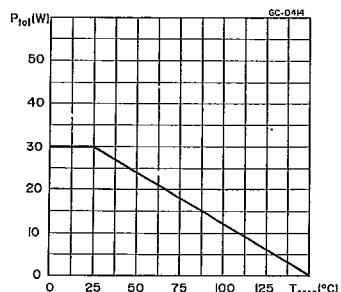

THERMAL IMPEDANCE OF ISOWATT220 PACKAGE

Fig. 1 illustrates the elements contributing to the thermal resistance of transistor heatsink assembly, using ISOWATT220 package.

The total thermal resistance $R_{th(\text{tot})}$ is the sum of each of these elements.

The transient thermal impedance, Z_{th} for different pulse durations can be estimated as follows:

1 - for a short duration power pulse less than 1ms;

$$Z_{th} < R_{thJ-C}$$

2 - for an intermediate power pulse of 5ms to 50ms:

$$Z_{th} = R_{thJ-C}$$

3 - for long power pulses of the order of 500ms or greater:

$$Z_{th} = R_{thJ-C} + R_{thC-HS} + R_{thHS-amb}$$

It is often possible to discern these areas on transient thermal impedance curves.

Fig. 1

