








## **PhotoDMOS Application Notes**

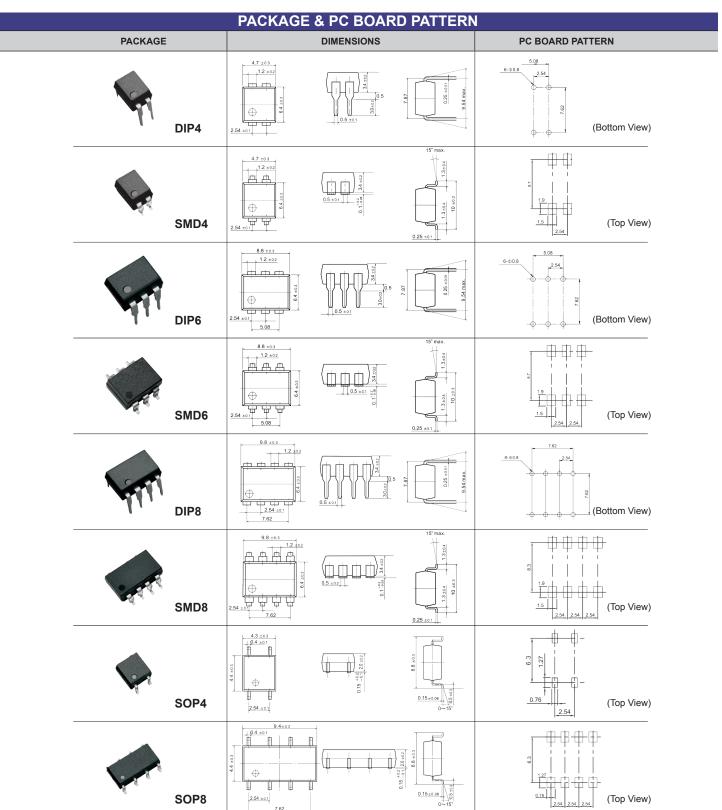

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405










## **PhotoDMOS Application Notes**

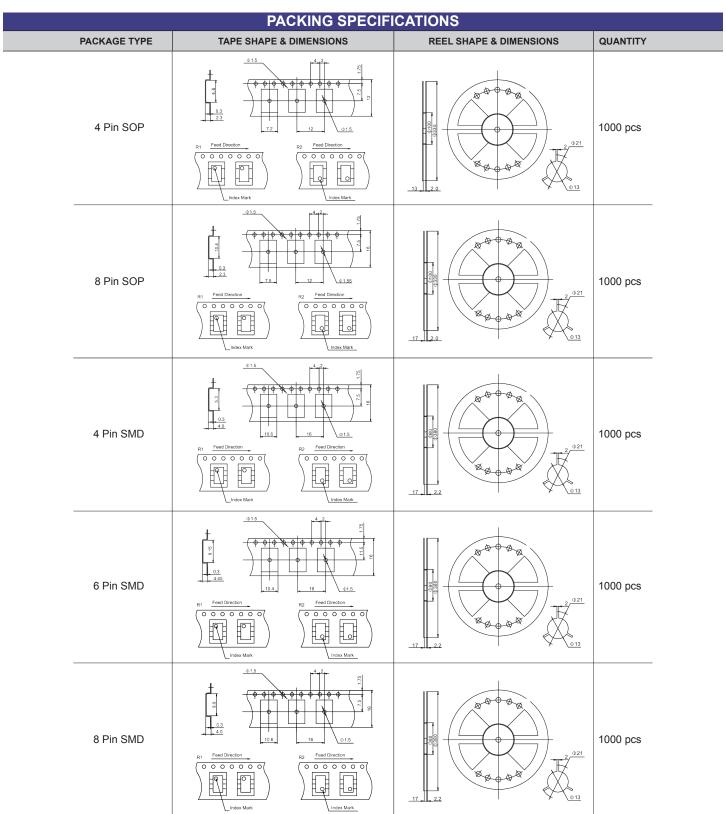

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405









## **PhotoDMOS Application Notes**

LOAD CONNECTING METHOD				
	TYPE	LOAD	CONNECTION	FEATURE
	4 pin	AC or DC	LOAD V. (AC or DC)	Control bi-directional signal
		A AC or DC	LOAD V. (AC or DC)	Control bi-directional signal
	6 pin		LOAD V. (DC)	On-Resistance is 1/2 of A-connection
		B DC	LOAD V. (DC)	2-Make-contacts (Source Common)
		C DC	LOAD V. (DC)	On-Resistance is 1/2 of B-connection
	8 pin	AC or DC	IFI LOAD VL (AC or DC)  VL (AC or DC)  VL (AC or DC)	2 input and 2 output
			VL (AC or DC)	1 input and 2 output

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405