8-bit serial-in, parallel-out shift register Rev. 7 — 13 June 2013

Product data sheet

#### 1. **General description**

The 74HC164; 74HCT164 is an 8-bit serial-in/parallel-out shift register. The device features two serial data inputs (DSA and DSB), eight parallel data outputs (Q0 to Q7). Data is entered serially through DSA or DSB and either input can be used as an active HIGH enable for data entry through the other input. Data is shifted on the LOW-to-HIGH transitions of the clock (CP) input. A LOW on the master reset input (MR) clears the register and forces all outputs LOW, independently of other inputs. Inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess of  $V_{CC}$ .

#### **Features and benefits** 2.

- Input levels:
  - For 74HC164: CMOS level
  - For 74HCT164: TTL level
- Gated serial data inputs
- Asynchronous master reset
- Complies with JEDEC standard no. 7A
- ESD protection:
  - HBM JESD22-A114F exceeds 2000 V
  - MM JESD22-A115-A exceeds 200 V.
- Multiple package options
- Specified from -40 °C to +85 °C and -40 °C to +125 °C.





8-bit serial-in, parallel-out shift register

## 3. Ordering information

Table 1. Ord	lering information			
Type number	Package			
	Temperature range	Name	Description	Version
74HC164N	–40 °C to +125 °C	DIP14	plastic dual in-line package; 14 leads (300 mil)	SOT27-1
74HCT164N				
74HC164D	–40 °C to +125 °C	SO14	plastic small outline package; 14 leads; body width	SOT108-1
74HCT164D			3.9 mm	
74HC164DB	–40 °C to +125 °C	SSOP14	plastic shrink small outline package; 14 leads; body	SOT337-1
74HCT164DB			width 5.3 mm	
74HC164PW	–40 °C to +125 °C	TSSOP14	plastic thin shrink small outline package; 14 leads;	SOT402-1
74HCT164PW			body width 4.4 mm	
74HC164BQ	–40 °C to +125 °C	DHVQFN14	plastic dual in-line compatible thermal enhanced very	SOT762-1
74HCT164BQ			thin quad flat package; no leads; 14 terminals; body $2.5 \times 3 \times 0.85$ mm	


## 4. Functional diagram

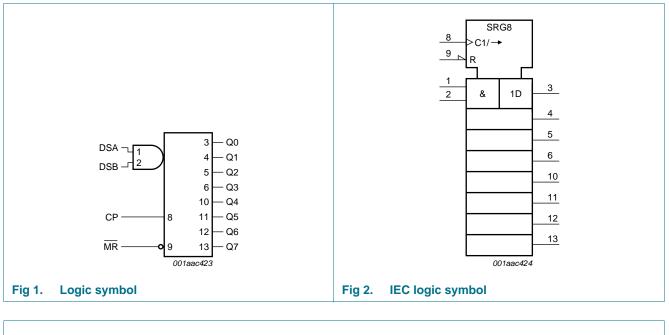

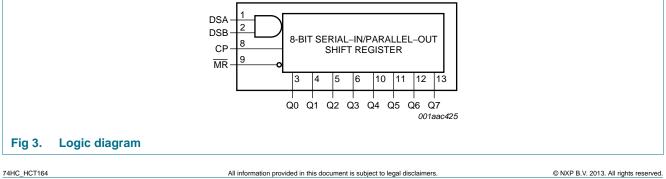


# 74HC164; 74HCT164

8-bit serial-in, parallel-out shift register

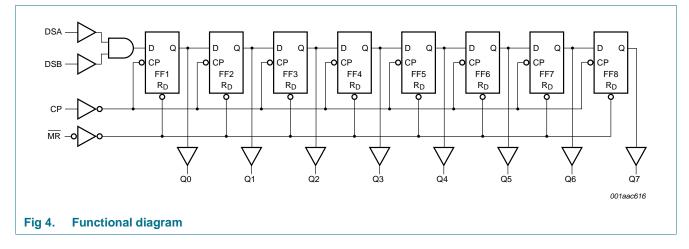

### 5. Pinning information

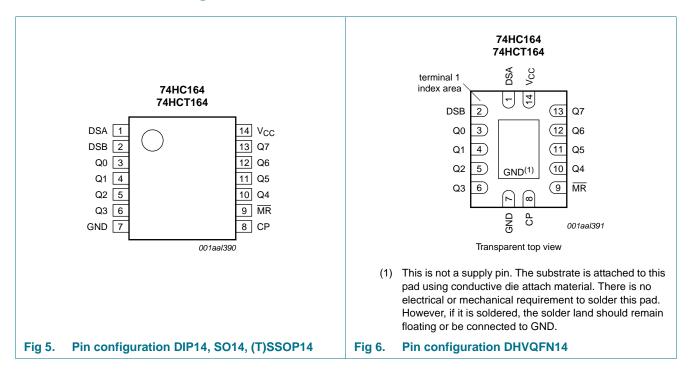

### 5.1 Pinning

8-bit serial-in, parallel-out shift register

### 5.2 Pin description

Table 2.	Pin description	
Symbol	Pin	Description
DSA	1	data input
DSB	2	data input
Q0 to Q7	3, 4, 5, 6, 10, 11, 12, 13	output
GND	7	ground (0 V)
СР	8	clock input (LOW-to-HIGH, edge-triggered)
MR	9	master reset input (active LOW)
V <sub>CC</sub>	14	positive supply voltage

### 6. Functional description

#### Table 3. Function table<sup>[1]</sup>

Operating	Input		Output	Output		
modes	MR	СР	DSA	DSB	Q0	Q1 to Q7
Reset (clear)	L	x	X	х	L	L to L
Shift	Н	$\uparrow$	I	I	L	q0 to q6
	Н	$\uparrow$	I	h	L	q0 to q6
	Н	$\uparrow$	h	I	L	q0 to q6
	Н	$\uparrow$	h	h	Н	q0 to q6

[1] H = HIGH voltage level

h = HIGH voltage level one set-up time prior to the LOW-to-HIGH clock transition

L = LOW voltage level

I = LOW voltage level one set-up time prior to the LOW-to-HIGH clock transition

q = lower case letters indicate the state of the referenced input one set-up time prior to the LOW-to-HIGH clock transition

 $\uparrow$  = LOW-to-HIGH clock transition

## 7. Limiting values

#### Table 4.Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>CC</sub>	supply voltage		-0.5	+7	V
I <sub>IK</sub>	input clamping current	$V_{\rm I}$ < –0.5 V or $V_{\rm I}$ > $V_{\rm CC}$ + 0.5 V	<u>[1]</u> _	±20	mA
I <sub>OK</sub>	output clamping current	$V_{\rm O}$ < –0.5 V or $V_{\rm O}$ > $V_{\rm CC}$ + 0.5 V	<u>[1]</u> _	±20	mA
Ι <sub>Ο</sub>	output current	$-0.5 \text{ V} < \text{V}_{\text{O}} < \text{V}_{\text{CC}} + 0.5 \text{ V}$	-	±25	mA
I <sub>CC</sub>	supply current		-	50	mA
I <sub>GND</sub>	ground current		-50	-	mA
T <sub>stg</sub>	storage temperature		-65	+150	°C

8-bit serial-in, parallel-out shift register

~ • •

In accordanc	e with the Absolute Maximum Ra	ating System (IEC 60134). Voltages are refer	enced to GNL	) (ground	= 0 V).
Symbol	Parameter	Conditions	Min	Max	Unit
P <sub>tot</sub>	total power dissipation		[2]		
	DIP14 package		-	750	mW
	SO14, (T)SSOP14 and DHVQFN14 packages		-	500	mW

#### Table 4. Limiting values ...continued

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] For DIP14 package: Ptot derates linearly with 12 mW/K above 70 °C.

For SO14 package: P<sub>tot</sub> derates linearly with 8 mW/K above 70 °C.

For (T)SSOP14 packages: Ptot derates linearly with 5.5 mW/K above 60 °C.

For DHVQFN14 packages: Ptot derates linearly with 4.5 mW/K above 60 °C.

### 8. Recommended operating conditions

#### Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V)

Symbol	Parameter	Conditions	74HC1	74HC164			164		Unit
			Min	Тур	Max	Min	Тур	Max	
V <sub>CC</sub>	supply voltage		2.0	5.0	6.0	4.5	5.0	5.5	V
VI	input voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V
Vo	output voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V
T <sub>amb</sub>	ambient temperature		-40	+25	+125	-40	+25	+125	°C
$\Delta t / \Delta V$	input transition rise and fall rate	$V_{CC} = 2.0 V$	-	-	625	-	-	-	ns/V
		$V_{CC} = 4.5 V$	-	1.67	139	-	1.67	139	ns/V
		$V_{CC} = 6.0 V$	-	-	83	-	-	-	ns/V

### 9. Static characteristics

#### Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbo	ol Parameter	Conditions		25 °C		-40 °C to	o +85 °C	–40 °C to +125 °C		Unit
			Min	Тур	Max	Min	Max	Min	Max	
74HC1	64									
$V_{\text{IH}}$		$V_{CC} = 2.0 V$	1.5	1.2	-	1.5	-	1.5	-	V
input voltage	input voltage	$V_{CC} = 4.5 V$	3.15	2.4	-	3.15	-	3.15	-	V
		$V_{CC} = 6.0 V$	4.2	3.2	-	4.2	-	4.2	-	V
$V_{IL}$	LOW-level	$V_{CC} = 2.0 V$	-	0.8	0.5	-	0.5	-	0.5	V
	input voltage	$V_{CC} = 4.5 V$	-	2.1	1.35	-	1.35	-	1.35	V
		$V_{CC} = 6.0 V$	-	2.8	1.8	-	1.8	-	1.8	V

# 74HC164; 74HCT164

8-bit serial-in, parallel-out shift register

Symbol	Parameter	Conditions		25 °C		-40 °C te	o +85 °C	–40 °C to	o +125 °C	Unit
			Min	Тур	Max	Min	Max	Min	Max	
V <sub>он</sub>	HIGH-level	$V_{I} = V_{IH} \text{ or } V_{IL}$								
	output voltage	$I_{O} = -20 \ \mu A; \ V_{CC} = 2.0 \ V$	1.9	2.0	-	1.9	-	1.9	-	V
		$I_{O} = -20 \ \mu A; \ V_{CC} = 4.5 \ V$	4.4	4.5	-	4.4	-	4.4	-	V
		$I_{O} = -20 \ \mu A; \ V_{CC} = 6.0 \ V$	5.9	6.0	-	5.9	-	5.9	-	V
		$I_{O} = -4.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	3.98	4.32	-	3.84	-	3.7	-	V
		$I_{O} = -5.2 \text{ mA}; V_{CC} = 6.0 \text{ V}$	5.48	5.81	-	5.34	-	5.2	-	V
V <sub>OL</sub>		$V_{I} = V_{IH} \text{ or } V_{IL}$								
	output voltage	$I_0 = 20 \ \mu A; V_{CC} = 2.0 \ V$	-	0	0.1	-	0.1	-	0.1	V
		$I_{O} = 20 \ \mu A; V_{CC} = 4.5 \ V$	-	0	0.1	-	0.1	-	0.1	V
		$I_0 = 20 \ \mu A; V_{CC} = 6.0 \ V$	-	0	0.1	-	0.1	-	0.1	V
		$I_{O}$ = 4.0 mA; $V_{CC}$ = 4.5 V	-	0.15	0.26	-	0.33	-	0.4	V
		$I_0 = 5.2 \text{ mA}; V_{CC} = 6.0 \text{ V}$	-	0.16	0.26	-	0.33	-	0.4	V
I <sub>I</sub>	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 6.0 V$	-	-	±0.1	-	±1	-	±1	μA
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0$ V	-	-	8.0	-	80	-	160	μA
CI	input capacitance		-	3.5	-	-	-	-	-	pF
74HCT1	64									
V <sub>IH</sub>	HIGH-level input voltage	$V_{CC}$ = 4.5 V to 5.5 V	2.0	1.6	-	2.0	-	2.0	-	V
V <sub>IL</sub>	LOW-level input voltage	$V_{CC}$ = 4.5 V to 5.5 V	-	1.2	0.8	-	0.8	-	0.8	V
V <sub>OH</sub>	HIGH-level	$V_{I} = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5 V$								
	output voltage	I <sub>O</sub> = -20 μA	4.4	4.5	-	4.4	-	4.4	-	V
		I <sub>O</sub> = -4.0 mA	3.98	4.32	-	3.84	-	3.7	-	V
V <sub>OL</sub>	LOW-level	$V_{I} = V_{IH} \text{ or } V_{IL}; V_{CC} = 4.5 \text{ V}$								
	output voltage	$I_0 = 20 \ \mu A; V_{CC} = 4.5 \ V$	-	0	0.1	-	0.1	-	0.1	V
		$I_{O} = 5.2 \text{ mA}; V_{CC} = 6.0 \text{ V}$	-	0.15	0.26	-	0.33	-	0.4	V
lı	input leakage current	$V_1 = V_{CC}$ or GND; $V_{CC} = 6.0 V$	-	-	±0.1	-	±1	-	±1	μA
I <sub>CC</sub>	supply current	$\label{eq:VI} \begin{array}{l} V_{I} = V_{CC} \text{ or } GND; \ I_{O} = 0 \ A; \\ V_{CC} = 6.0 \ V \end{array}$	-	-	8	-	80	-	160	μA
ΔI <sub>CC</sub>	additional supply current	per input pin; $V_I = V_{CC} - 2.1 \text{ V}; I_O = 0 \text{ A};$ other inputs at $V_{CC}$ or GND; $V_{CC} = 4.5 \text{ V}$ to 5.5 V	-	100	360	-	450	-	490	μA
Cı	input capacitance		-	3.5	-	-	-	-	-	pF

#### Table 6. Static characteristics ... continued

8-bit serial-in, parallel-out shift register

## **10. Dynamic characteristics**

#### Table 7. Dynamic characteristics

GND = 0 V;  $t_r = t_f = 6$  ns;  $C_L = 50$  pF; test circuit see <u>Figure 10</u>; unless otherwise specified

Symbol	Parameter	Conditions			25 °C		–40 °C t	o +85 °C	–40 °C to	+125 °C	Unit
			N	/lin	Тур	Max	Min	Max	Min	Max	
74HC164	4							1		1	
t <sub>pd</sub>	propagation	CP to Qn; see Figure 7	[1]								
	delay	$V_{CC} = 2.0 V$		-	41	170	-	215	-	255	ns
		$V_{CC} = 4.5 V$		-	15	34	-	43	-	51	ns
		$V_{CC} = 5.0 \text{ V}; \text{ C}_{L} = 15 \text{ pF}$		-	12	-	-	-	-	-	ns
		$V_{CC} = 6.0 V$		-	12	29	-	37	-	43	ns
t <sub>PHL</sub>	HIGH to LOW	MR to Qn; see Figure 8									
	propagation	$V_{CC} = 2.0 V$		-	39	140	-	175	-	210	ns
	delay	$V_{CC} = 4.5 V$		-	14	28	-	35	-	42	ns
		$V_{CC} = 5.0 \text{ V}; \text{ C}_{L} = 15 \text{ pF}$		-	11	-	-	-	-	-	ns
		$V_{CC} = 6.0 V$		-	11	24	-	30	-	36	ns
t <sub>t</sub>	transition time	see Figure 7	[2]								
		$V_{CC} = 2.0 V$		-	19	75	-	95	-	110	ns
		$V_{CC} = 4.5 V$		-	7	15	-	19	-	22	ns
		$V_{CC} = 6.0 V$		-	6	13	-	16	-	19	ns
t <sub>W</sub>	pulse width	CP HIGH or LOW; see <u>Figure 7</u>									
		$V_{CC} = 2.0 V$	8	80	14	-	100	-	120	-	ns
		$V_{CC} = 4.5 V$		16	5	-	20	-	24	-	ns
		$V_{CC} = 6.0 V$		14	4	-	17	-	20	-	ns
		MR LOW; see Figure 8									
		$V_{CC} = 2.0 V$	(	60	17	-	75	-	90	-	ns
		$V_{CC} = 4.5 V$		12	6	-	15	-	18	-	ns
		$V_{CC} = 6.0 V$		10	5	-	13	-	15	-	ns
rec	recovery time	MR to CP; see Figure 8									
		$V_{CC} = 2.0 V$	(	60	17	-	75	-	90	-	ns
		$V_{CC} = 4.5 V$		12	6	-	15	-	18	-	ns
		$V_{CC} = 6.0 V$		10	5	-	13	-	15	-	ns
su	set-up time	DSA, and DSB to CP; see <u>Figure 9</u>									
		$V_{CC} = 2.0 V$	(	60	8	-	75	-	90	-	ns
		$V_{CC} = 4.5 V$		12	3	-	15	-	18	-	ns
		$V_{CC} = 6.0 V$		10	2	-	13	-	15	-	ns
ĥ	hold time	DSA, and DSB to CP; see <u>Figure 9</u>									
		$V_{CC} = 2.0 V$	-	+4	-6	-	4	-	4	-	ns
		V <sub>CC</sub> = 4.5 V	-	+4	-2	-	4	-	4	-	ns

8-bit serial-in, parallel-out shift register

maximum					–40 °C to +85 °C		–40 °C to +125 °C		Unit	
maximum			Min	Тур	Max	Min	Max	Min	Max	
	for Cp, see <u>Figure 7</u>									
frequency	$V_{CC} = 2.0 V$		6	23	-	5	-	4	-	MHz
	$V_{CC} = 4.5 V$		30	71	-	24	-	20	-	MH:
	$V_{CC}$ = 5.0 V; $C_{L}$ = 15 pF		-	78	-	-	-	-	-	MHz
	$V_{CC} = 6.0 V$		35	85	-	28	-	24	-	MH:
power dissipation capacitance	per package; V <sub>I</sub> = GND to V <sub>CC</sub>	[3]	-	40	-	-	-	-	-	pF
64										
propagation	CP to Qn; see Figure 7	[1]								
delay	$V_{CC} = 4.5 V$		-	17	36	-	45	-	54	ns
	$V_{CC}$ = 5.0 V; $C_{L}$ = 15 pF		-	14	-	-	-	-	-	ns
HIGH to LOW	MR to Qn; see Figure 8									
	$V_{CC} = 4.5 V$		-	19	38	-	48	-	57	ns
uelay	$V_{CC} = 5.0 \text{ V}; \text{ C}_{L} = 15 \text{ pF}$		-	16	-	-	-	-	-	ns
transition time	see Figure 7	[2]								
	$V_{CC} = 4.5 V$		-	7	15	-	19	-	22	ns
pulse width	CP HIGH or LOW; see <u>Figure 7</u>									
	$V_{CC} = 4.5 V$		18	7	-	23	-	27	-	ns
	MR LOW; see Figure 8									
	$V_{CC} = 4.5 V$		18	10	-	23	-	27	-	ns
recovery time	MR to CP; see Figure 8									
	$V_{CC} = 4.5 V$		16	7	-	20	-	24	-	ns
set-up time	DSA, and DSB to CP; see <u>Figure 9</u>									
	$V_{CC} = 4.5 V$		12	6	-	15	-	18	-	ns
hold time	DSA, and DSB to CP; see <u>Figure 9</u>									
	$V_{CC} = 4.5 V$		+4	-2	-	4	-	4	-	ns
maximum	for Cp, see Figure 7									
trequency	$V_{CC} = 4.5 V$		27	55	-	22	-	18	-	MH:
	dissipation capacitance 34 propagation delay HIGH to LOW propagation delay transition time pulse width pulse width recovery time set-up time hold time	$V_{CC} = 6.0 V$ $V_{CC} = 4.5 V$	$\begin{tabular}{ c c c } \hline V_{CC} = 6.0 \ V \\ \hline V_{CC} = 0 \ V_{CC} \\ \hline V_{CC} = 0 \ V_{CC} \\ \hline V_{CC} = 0 \ V_{CC} \\ \hline V_{CC} = 4.5 \ V \\ \hline Pulse width \\ \hline CP \ HIGH or \ LOW; see \ Figure 8 \\ \hline V_{CC} = 4.5 \ V \\ \hline Pulse width \\ \hline CP \ HIGH or \ LOW; see \ Figure 8 \\ \hline V_{CC} = 4.5 \ V \\ \hline recovery \ time \\ \hline MR \ to \ CP; see \ Figure 8 \\ \hline V_{CC} = 4.5 \ V \\ \hline recovery \ time \\ \hline DSA, and \ DSB \ to \ CP; see \ Figure 9 \\ \hline V_{CC} = 4.5 \ V \\ \hline hold \ time \\ \hline DSA, and \ DSB \ to \ CP; see \ Figure 9 \\ \hline V_{CC} = 4.5 \ V \\ \hline maximum \\ frequency \hline \end{tabular}$	V <sub>CC</sub> = 6.0 V35power dissipation capacitanceper package; V <sub>I</sub> = GND to V <sub>CC</sub> [3]-for propagation delayCP to Qn; see Figure 7[1]-V <sub>CC</sub> = 4.5 VV <sub>CC</sub> = 5.0 V; C <sub>L</sub> = 15 pFHIGH to LOW propagation delayMR to Qn; see Figure 8-V <sub>CC</sub> = 4.5 VV <sub>CC</sub> = 4.5 V-V <sub>CC</sub> = 4.5 V-pulse widthCP HIGH or LOW; see Figure 712pulse widthCP HIGH or LOW; see Figure 718recovery timeMR to CP; see Figure 8-V <sub>CC</sub> = 4.5 V18recovery timeDSA, and DSB to CP; see Figure 9-Nold timeDSA, and DSB to CP; see Figure 9-V <sub>CC</sub> = 4.5 V12hold timeDSA, and DSB to CP; see Figure 9-V <sub>CC</sub> = 4.5 V12	$\begin{tabular}{ c c c } \hline V_{CC} = 6.0 \ V & 35 & 85 \\ \hline V_{CC} = 6.0 \ V & 35 & 85 \\ \hline V_{CC} = 6.0 \ V & 35 & 85 \\ \hline V_{CC} = 9.0 \ V_{CC} & 13 & -1 & 40 \\ \hline V_{C} = 9.0 \ V_{CC} & 10 \ V_{CC} & 11 & -1 & -1 \\ \hline V_{CC} = 4.5 \ V & -1 & 17 \\ \hline V_{CC} = 4.5 \ V & -1 & 17 \\ \hline V_{CC} = 5.0 \ V; \ C_{L} = 15 \ PF & -1 & 14 \\ \hline HIGH to LOW & $$MR to Qn; see Figure 8 & -1 & -16 \\ \hline V_{CC} = 4.5 \ V & -1 & 19 \\ \hline V_{CC} = 5.0 \ V; \ C_{L} = 15 \ PF & -1 & 16 \\ \hline Transition time & $$see Figure 7 & 12 & -16 \\ \hline V_{CC} = 4.5 \ V & -1 & 18 & 7 \\ \hline V_{CC} = 4.5 \ V & -1 & 18 & 7 \\ \hline Pulse width & $CP \ HIGH or \ LOW; see \ Figure 8 & -1 & -16 \\ \hline V_{CC} = 4.5 \ V & -18 & 7 \\ \hline Pulse width & $CP \ HIGH or \ LOW; see \ Figure 8 & -16 \\ \hline V_{CC} = 4.5 \ V & 18 & 10 \\ \hline recovery time & $$MR \ LOW; see \ Figure 8 & -16 \\ \hline V_{CC} = 4.5 \ V & 18 & 16 \\ \hline PSA, and \ DSB \ CP; see \ Figure 8 & -16 \\ \hline V_{CC} = 4.5 \ V & 16 & 7 \\ \hline Set-up \ time & $$DSA, and \ DSB \ CP; see \ Figure 9 & -16 \\ \hline Nold \ time & $$DSA, and \ DSB \ CP; see \ Figure 9 & -16 \\ \hline V_{CC} = 4.5 \ V & 12 & 6 \\ \hline hold \ time & $$DSA, and \ DSB \ CP; see \ Figure 9 & -16 \\ \hline V_{CC} = 4.5 \ V & 12 & -16 \\ \hline maximum \ frequency & $$V_{CC} = 4.5 \ V & 12 & -16 \\ \hline Nold \ time & $$V_{CC} = 4.5 \ V & 12 & -16 \\ \hline MR \ DSA, and \ DSB \ CP; see \ Figure 9 & -16 \\ \hline V_{CC} = 4.5 \ V & 12 & -16 \\ \hline MR \ DSA, and \ DSB \ CP; see \ Figure 9 & -16 \\ \hline V_{CC} = 4.5 \ V & -16 & -16 \\ \hline MR \ DSA, and \ DSB \ CP; see \ Figure 9 & -16 \\ \hline MR \ DSA, and \ DSB \ CP; see \ Figure 9 & -16 \\ \hline V_{CC} = 4.5 \ V & 12 & -16 \\ \hline MR \ DSA, and \ DSB \ CP; see \ Figure 7 & -16 \\ \hline MR \ CP \ Figure 9 & -16 \\ \hline V_{CC} = 4.5 \ V & 12 & -16 \\ \hline MR \ CP \ C$	$\begin{tabular}{ c c c c } \hline V_{CC} = 6.0 \ V & 35 & 85 & - \\ \hline V_{CC} = 6.0 \ V & 35 & 85 & - \\ \hline V_{CC} = 0 \ V_{CC} & 13 & - & 40 & - \\ \hline V_{C} = 0 \ V_{C} & 0 \ V_{CC} & 11 & - & - \\ \hline V_{C} = 0 \ V_{C} & 11 & - & - & - & - & - & - & - & - & $	$\begin{tabular}{ c c c c } \hline V_{CC} = 6.0 \ V & 35 & 85 & - & 28 \\ \hline V_{CC} = 6.0 \ V & 9 \ Per package; V_I = GND to V_{CC} & 19 & - & 40 & - & - \\ \hline V_{I} = GND to V_{CC} & 11 & - & - & - & - & - & - & - & - & $	$\begin{tabular}{ c c c c } \hline V_{CC} = 6.0 \ V & 35 & 85 & - & 28 & - \\ \hline V_{CC} = 6.0 \ V & 35 & 85 & - & 28 & - \\ \hline V_{C} = package; & 2 & - & 40 & - & - \\ \hline Propagation delay & $$ $$ $$ $$ $$ $$ $$ $$ $$ $$ $$ $$ $$	V <sub>CC</sub> = 6.0 V         35         85         -         28         -         24           power dissipation capacitance         Propagation delay         Propagation (CP to On; see Figure 7         [3]         -         40         -	$\begin{tabular}{ c c c c c } \hline V_{CC} = 6.0 \ V & 35 & 85 & - & 28 & - & 24 & - & \\ \hline V_{CC} = 6.0 \ V & - & 12 & 40 & - & - & - & - & - & - & - & - & - & $

#### Table 7. Dynamic characteristics ... continued

#### 8-bit serial-in, parallel-out shift register

Symbol	Parameter	Conditions	25 °C		–40 °C to +85 °C		–40 °C to +125 °C		Unit		
				Min	Тур	Max	Min	Max	Min	Max	
C <sub>PD</sub>	power dissipation capacitance	per package; V <sub>I</sub> = GND to V <sub>CC</sub> – 1.5 V	<u>[3]</u>	-	40	-	-	-	-	-	pF

#### Table 7. **Dynamic characteristics** ... continued

[1]  $t_{pd}$  is the same as  $t_{PHL}$  and  $t_{PLH}$ .

[2]  $t_t$  is the same as  $t_{THL}$  and  $t_{TLH}$ .

[3]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu W$ ):

 $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \sum (C_L \times V_{CC}^2 \times f_o)$  where:  $f_i$  = input frequency in MHz;


 $f_o = output frequency in MHz;$ 

C<sub>L</sub> = output load capacitance in pF;

 $V_{CC}$  = supply voltage in V;

N = number of inputs switching;

 $\Sigma (C_L \times V_{CC}^2 \times f_o)$  = sum of outputs.

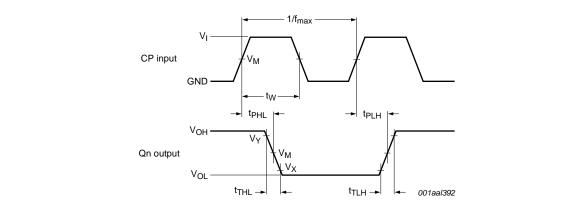

(1) Measurement points are given in Table 8.

 $V_{\text{OL}}$  and  $V_{\text{OH}}$  are typical voltage output levels that occur with the output load.


Waveforms showing the clock (CP) to output (Qn) propagation delays, the clock pulse width, the output Fig 7. transition times and the maximum clock frequency

Table 8. Measurem	ient points						
Туре	Input	Output					
	V <sub>M</sub>	V <sub>M</sub>	V <sub>X</sub>	V <sub>Y</sub>			
74HC164	0.5V <sub>CC</sub>	0.5V <sub>CC</sub>	0.1V <sub>CC</sub>	0.9V <sub>CC</sub>			
74HCT164	1.3 V	1.3 V	0.1V <sub>CC</sub>	0.9V <sub>CC</sub>			

#### - I- I .... .


# 74HC164; 74HCT164

8-bit serial-in, parallel-out shift register

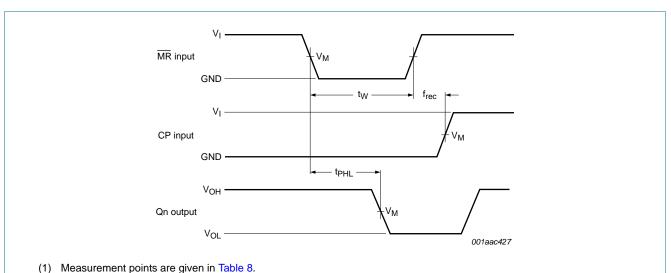


 $V_{OL}$  and  $V_{OH}$  are typical voltage output levels that occur with the output load.



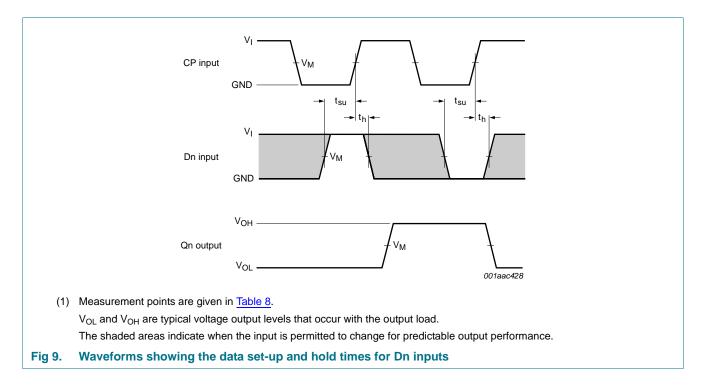

# 74HC164; 74HCT164

8-bit serial-in, parallel-out shift register

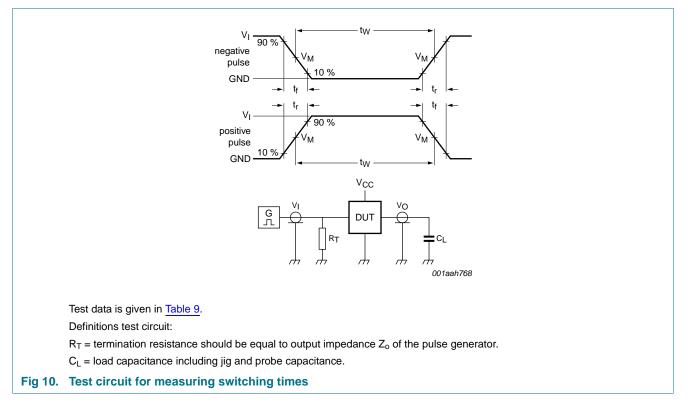


#### Table 9. Test data

Туре	Input		Load	Test
	VI	t <sub>r</sub> , t <sub>f</sub>	CL	
74HC164	V <sub>CC</sub>	6.0 ns	15 pF, 50 pF	t <sub>PLH</sub> , t <sub>PHL</sub>
74HCT164	3.0 V	6.0 ns	15 pF, 50 pF	t <sub>PLH</sub> , t <sub>PHL</sub>

8-bit serial-in, parallel-out shift register

### 11. Package outline

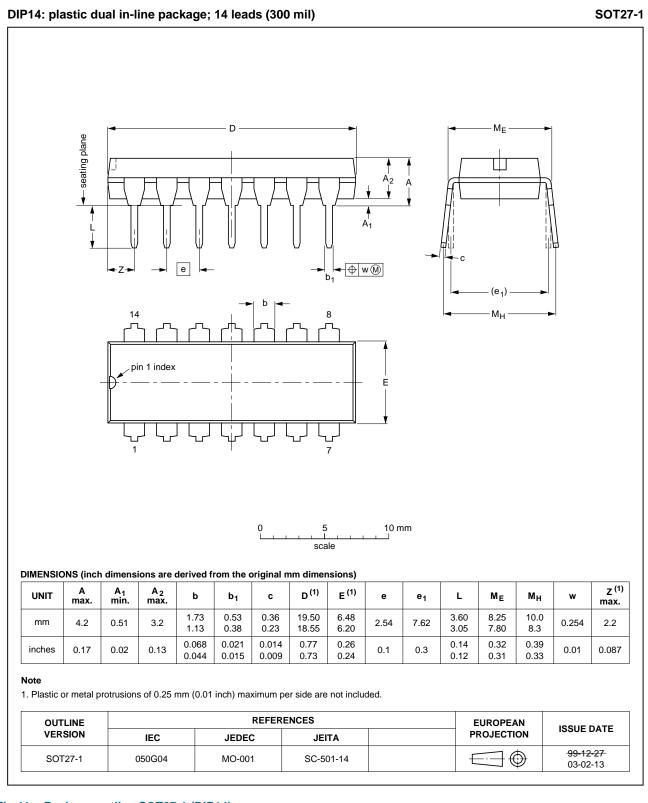

#### Fig 11. Package outline SOT27-1 (DIP14)

All information provided in this document is subject to legal disclaimers.

8-bit serial-in, parallel-out shift register

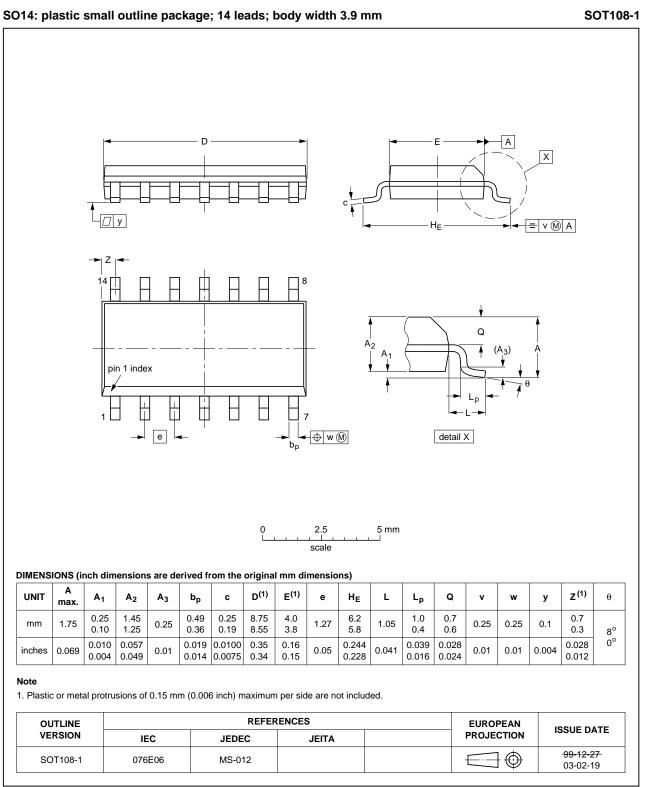


Fig 12. Package outline SOT108-1 (SO14)

8-bit serial-in, parallel-out shift register

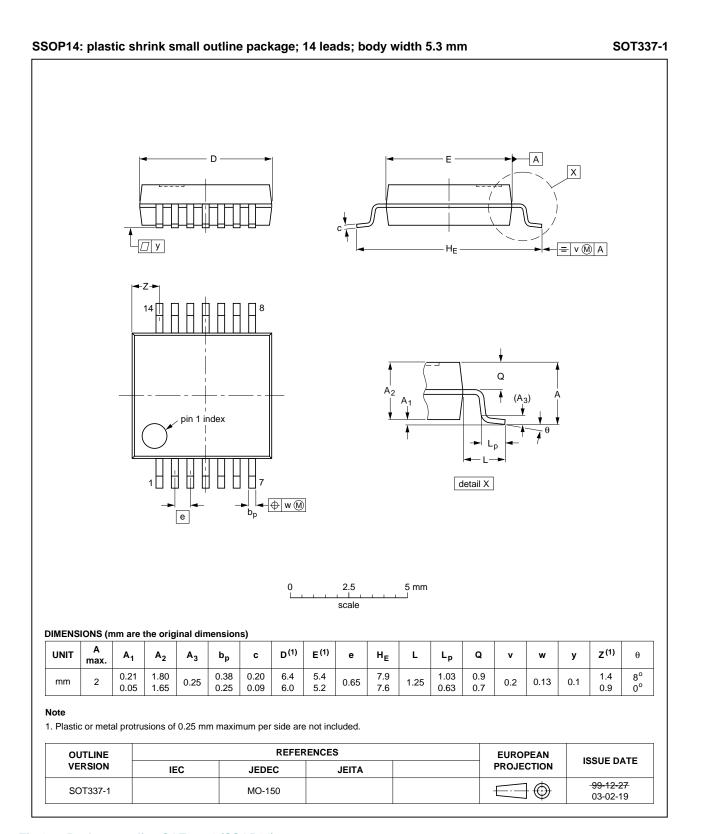


Fig 13. Package outline SOT337-1 (SSOP14)

8-bit serial-in, parallel-out shift register


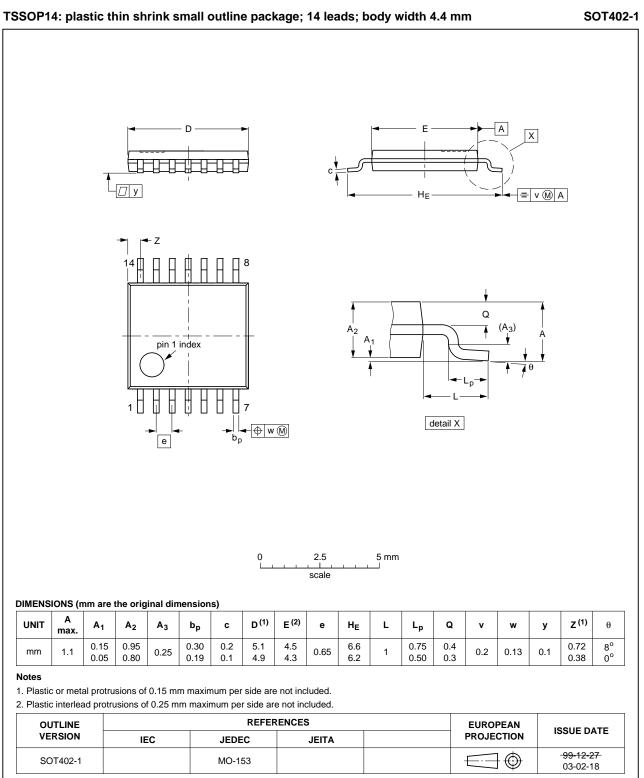


Fig 14. Package outline SOT402-1 (TSSOP14)

All information provided in this document is subject to legal disclaimers.

8-bit serial-in, parallel-out shift register

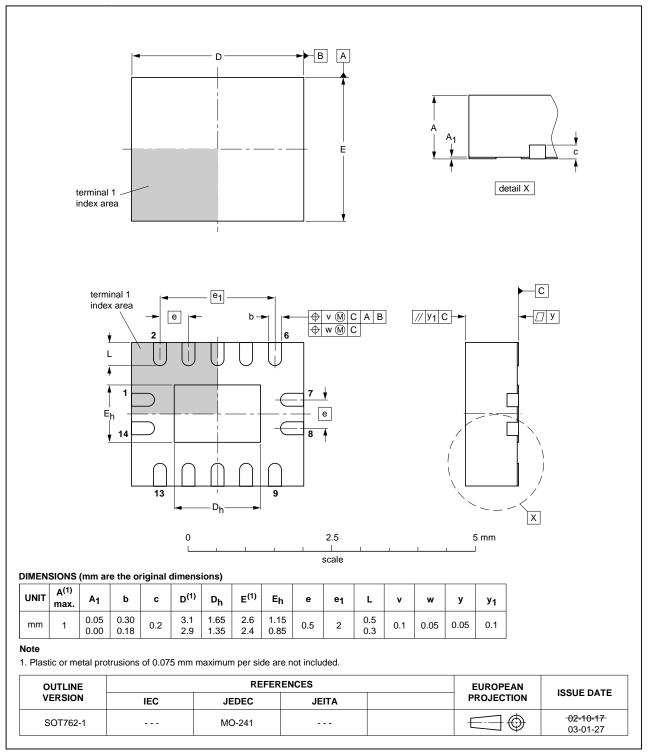

#### DHVQFN14: plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 14 terminals; body 2.5 x 3 x 0.85 mm SOT762-1

Fig 15. Package outline SOT762-1 (DHVQFN14)

8-bit serial-in, parallel-out shift register

## **12. Abbreviations**

AcronymDescriptionCMOSComplementary Metal-Oxide SemiconductorDUTDevice Under TestESDElectroStatic DischargeHBMHuman Body ModelLSTTLLow-power Schottky Transistor-Transistor LogiMMMachine Model	Table 10. Abbreviations		
DUTDevice Under TestESDElectroStatic DischargeHBMHuman Body ModelLSTTLLow-power Schottky Transistor-Transistor Logic			
ESDElectroStatic DischargeHBMHuman Body ModelLSTTLLow-power Schottky Transistor-Transistor Logic			
HBM     Human Body Model       LSTTL     Low-power Schottky Transistor-Transistor Logi			
LSTTL Low-power Schottky Transistor-Transistor Logi			
MAA Maabina Madal			
TTL Transistor-Transistor Logic			

## 13. Revision history

#### Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
74HC_HCT164 v.7	20130613	Product data sheet	-	74HC_HCT164 v.6
Modifications:	<ul> <li>General deservation</li> </ul>	cription updated.		
74HC_HCT164 v.6	20111212	Product data sheet	-	74HC_HCT164 v.5
Modifications:	<ul> <li>Legal pages</li> </ul>	updated.		
74HC_HCT164 v.5	20101125	Product data sheet	-	74HC_HCT164 v.4
74HC_HCT164 v.4	20100202	Product data sheet	-	74HC_HCT164 v.3
74HC_HCT164 v.3	20050404	Product data sheet	-	74HC_HCT164_ CNV v.2
74HC_HCT164_CNV v.2	19901201	Product specification	-	-

8-bit serial-in, parallel-out shift register

### 14. Legal information

#### 14.1 Data sheet status

Document status[1][2]	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <a href="http://www.nxp.com">http://www.nxp.com</a>.

### 14.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 14.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nxp.com/profile/terms">http://www.nxp.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

#### 8-bit serial-in, parallel-out shift register

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

### 14.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

### **15. Contact information**

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com

8-bit serial-in, parallel-out shift register

### 16. Contents

1	General description 1
2	Features and benefits 1
3	Ordering information 2
4	Functional diagram 2
5	Pinning information 3
5.1 5.2	Pinning
6	Functional description
7 7	Limiting values
8	Recommended operating conditions 5
9	Static characteristics
•	
10	Dynamic characteristics 7
11	Package outline 12
12	Abbreviations 17
13	Revision history 17
14	Legal information 18
14.1	Data sheet status 18
14.2	Definitions
14.3	Disclaimers 18
14.4	Trademarks
15	Contact information 19
16	Contents

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2013.

All rights reserved.

For more information, please visit: http://www.nxp.com For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 13 June 2013 Document identifier: 74HC\_HCT164