


**塑封快恢复高压二极管**  
**反向电压 4KV**  
**正向电流 5mA**

**Plastic Fast Recover High Voltage Rectifier**  
**Reverse Voltage 4KV**  
**Forward Current 5mA**

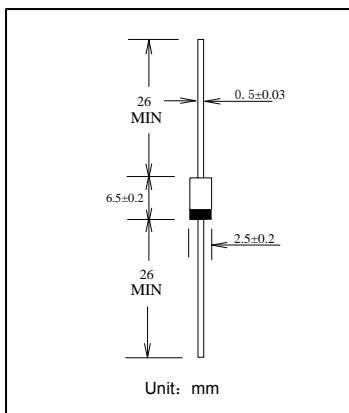

### 特征 Features

- 适用于高稳定显示器或电视接收机及办公类自动化设备  
For high resolution displays or TV receivers and Working automation equipment
- 扩散结  
Diffused-junction
- 具有良好的高温输出特性  
Excellent high temperature output characteristics  
(Small leakage current at high temperature and excellent reverse characteristics)

**极限值和温度特性 TA = 25°C 除非另有规定。**

**Maximum Ratings & Thermal Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.

参数名称 Item	符号 Symbol	2CL04	单位 Unit
反向重复峰值电压 Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	4	kV
正向平均电流 Average Forward Current	I <sub>F(AV)</sub>	5 (正弦半波50HZ, 电阻负载Ta=25°C) (50HZ half-sine wave,Resistance load Ta=25°C)	mA
正向(不重复)浪涌电流 Non-Repetitive Forward Surge Current	I <sub>FSM</sub>	0.5 (正弦半波50HZ, 1/2周期, Ta=25°C) (50HZ half-sine wave,1/2 cycle, Ta = 25 °C)	A
工作环境温度 Ambient Temperature	T <sub>amb</sub>	-40 --- +100	°C
最高结温 Maximum Junction Temperature	T <sub>(VJ)</sub>	120	°C
贮存温度 Storage Temperature	T <sub>stg</sub>	-40 --- +120	°C

**电特性 TA = 25°C 除非另有规定。**

**Electrical Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.

参数名称 Item	符号 Symbol	2CL04	单位 Unit
正向压降 Forward Voltage Drop	I <sub>F</sub> = 10mA	V <sub>F</sub>	V
常温反向漏电流 Normal Temperature Reverse Current	VR=VRRM	I <sub>RM1</sub>	μA
高温反向漏电流 High Temperature Reverse Current	TA=100°C VR=VRRM	I <sub>RM2</sub>	μA
反向恢复时间 Reverse Recovery Time	I <sub>F</sub> = 2mA, I <sub>RP</sub> = 4mA 1mA recovery	trr	nS

## 特性曲线 Characteristic Curves

