

# UM10764

## Vertical Alignment (VA) displays and NXP LCD drivers

Rev. 1 — 11 November 2013

User manual

### Document information

Info	Content
<b>Keywords</b>	Vertical Alignment, Twisted Nematic, LCD, PCA85232U, PCA85233UG, PCA8576FUG, PCF21219DUGR, PCA85262ATT, PCA85276ATT
<b>Abstract</b>	Compared to the traditional Twisted Nematic (TN) displays, VA displays have deeper black back-ground color, much higher contrast ratio, much wider viewing angle and better image quality at extreme temperatures. However, the VA display technology has stronger requirements for the display drivers than the TN displays, mainly in terms of higher LCD supply voltage ( $V_{LCD}$ ) and/or higher frame frequency ( $f_{fr}$ ). NXP has extended their LCD driver portfolio to specifically drive Vertical Alignment (VA) displays.



## Revision history

Rev	Date	Description
v.1	20131111	new user manual, first revision

## Contact information

For more information, please visit: <http://www.nxp.com>


For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

## 1. Introduction

NXP extended the LCD drivers to specifically drive the high-contrast, true black background and wide viewing angle Vertical Alignment (VA) displays.

## 2. Vertical Alignment display technology


Vertical Alignment (VA) is a display technology in which the liquid crystals naturally align vertically to the glass substrates (homeotropic alignment). When no voltage is applied, the polarized light passes through the cell without a change in polarization and the light is completely blocked by the second polarizer set at  $90^\circ$  to the first, creating a perfectly black state. When voltage is applied, the LC molecules rotate to a horizontal position allowing light to pass through and create a white display image.

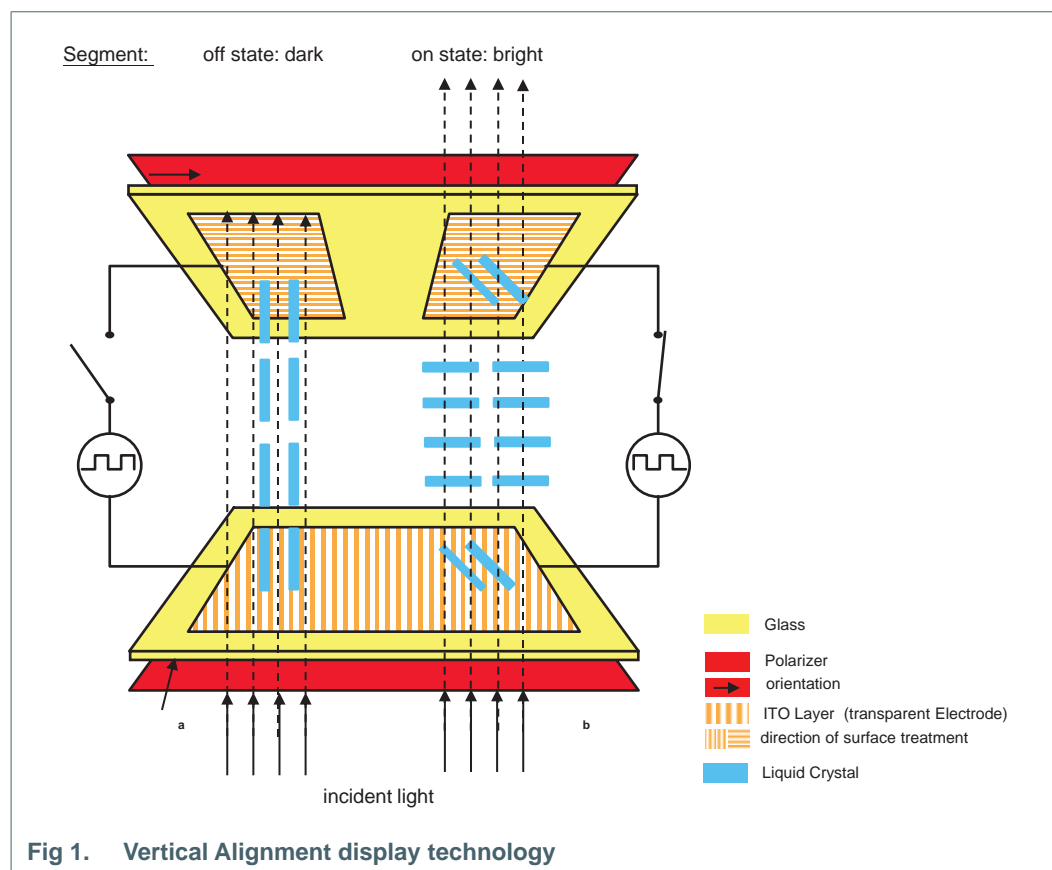

## 3. Vertical Alignment (VA) compared to Twisted Nematic (TN) displays

In the traditional Twisted Nematic (TN) displays, the alignment layers used in the top and bottom glasses are oriented orthogonal to each other creating a  $90^\circ$  twist of the LCD molecules. The polarized light passes through the LC medium, where is twisted due to the wave guiding of the LC and passes through the top polarizer (also called analyzer) creating a bright state (this configuration is also called the normally white mode as opposed to the normally black mode in which the polarizer are placed in parallel position). Upon application of an electric field, the LC molecules align parallel to the electric field

due to their dielectric anisotropy, and the wave guiding nature of the LC medium is lost. Thus, the polarized light from the first polarizer remains unchanged and is blocked by the analyzer, creating the black state.

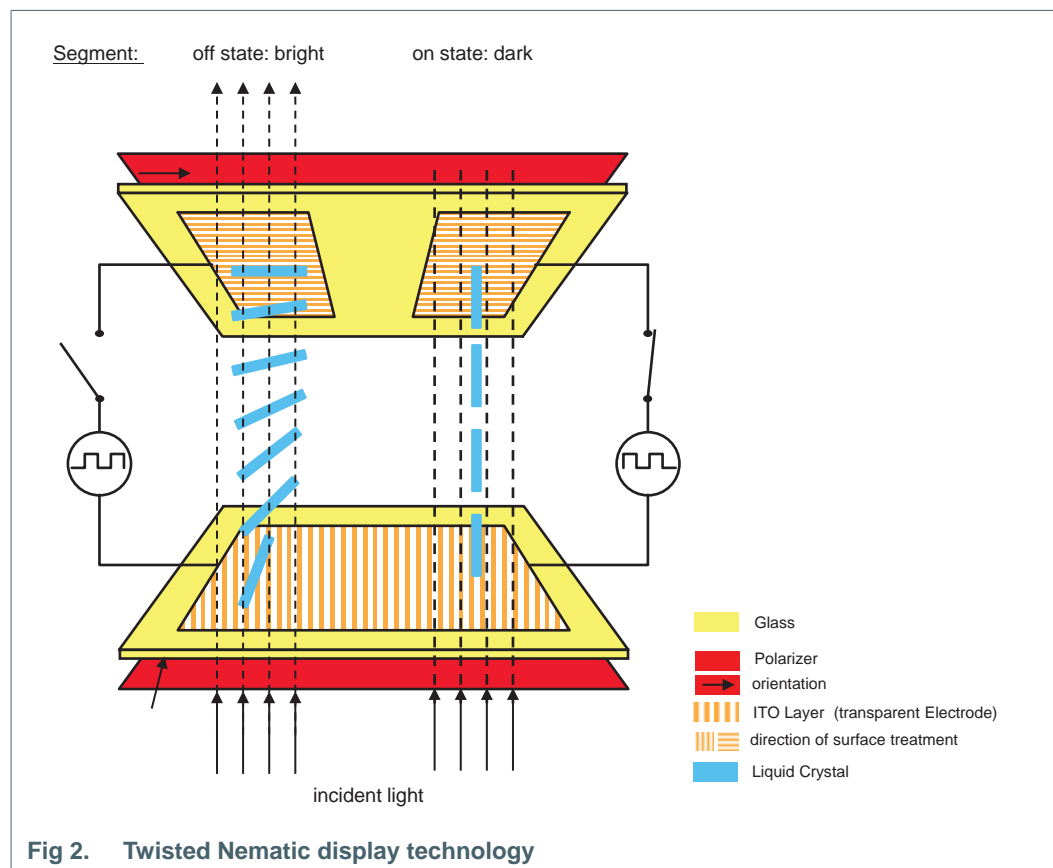


Compared to the traditional Twisted Nematic (TN) displays, VA displays have deeper black back-ground color, much higher contrast ratio, much wider viewing angle and better image quality at extreme temperatures. This new break through display technology is particularly well suited for applications where the display is

1. exposed to sunlight, i.e. needs to be readable in sunlight,
2. is mounted on a black background, e.g. in instrument clusters in the car or
3. is located sideways from the viewer, e.g. in the center stack of a car, and thus needs to be viewable under a wide angle.


VA displays are in growing demand for many applications, such as automotive, white goods, home, and medical equipment.

However, the VA display technologies have stronger requirements for the display drivers than the TN displays, mainly in terms of higher LCD supply voltage ( $V_{LCD}$ ) and/or higher frame frequency ( $f_{fr}$ ). The requirements depend on the specific VA technology developed by each LCD manufacturer as well as on the multiplex rates (backplane drive configuration) used in application. See [Figure 3](#):

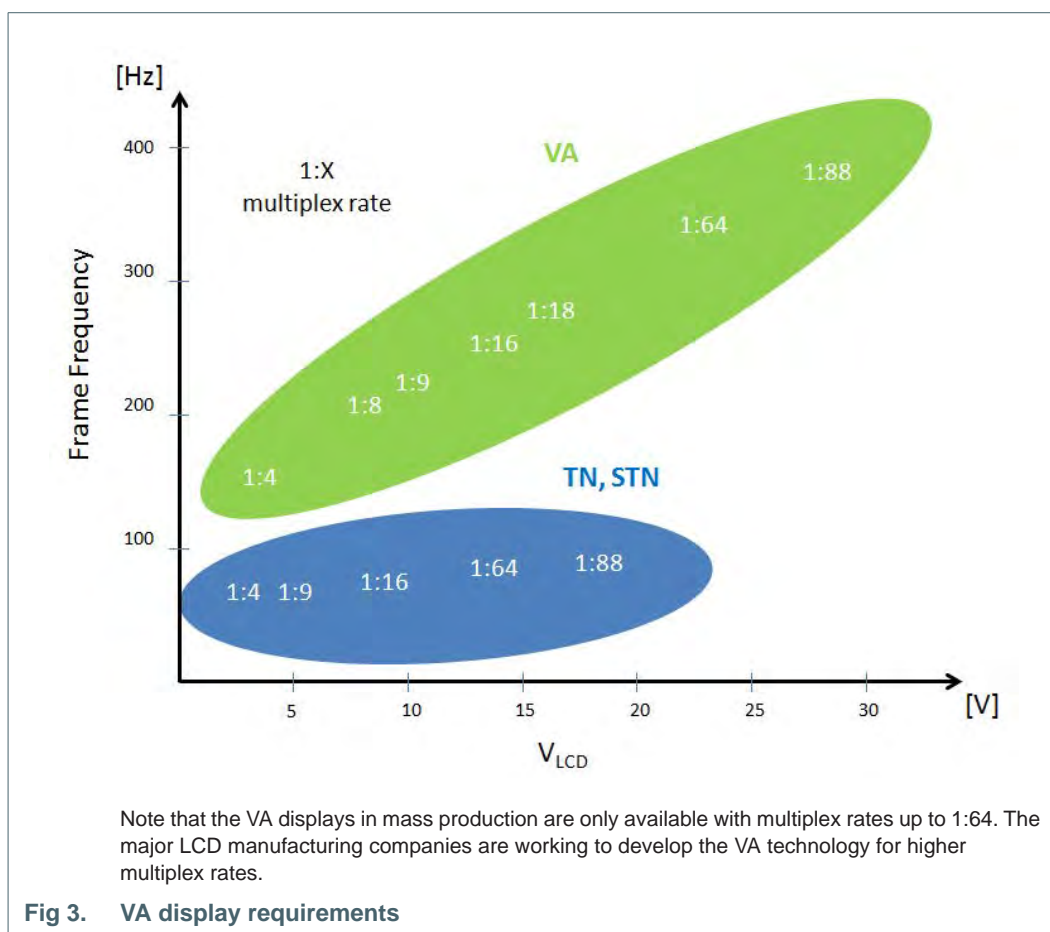

## 4. NXP LCD drivers meet the VA requirements

Regardless of the manufacturer, NXP expanded its LCD drivers' portfolio in order to meet the strictest VA requirements in the industry. See [Figure 4](#):

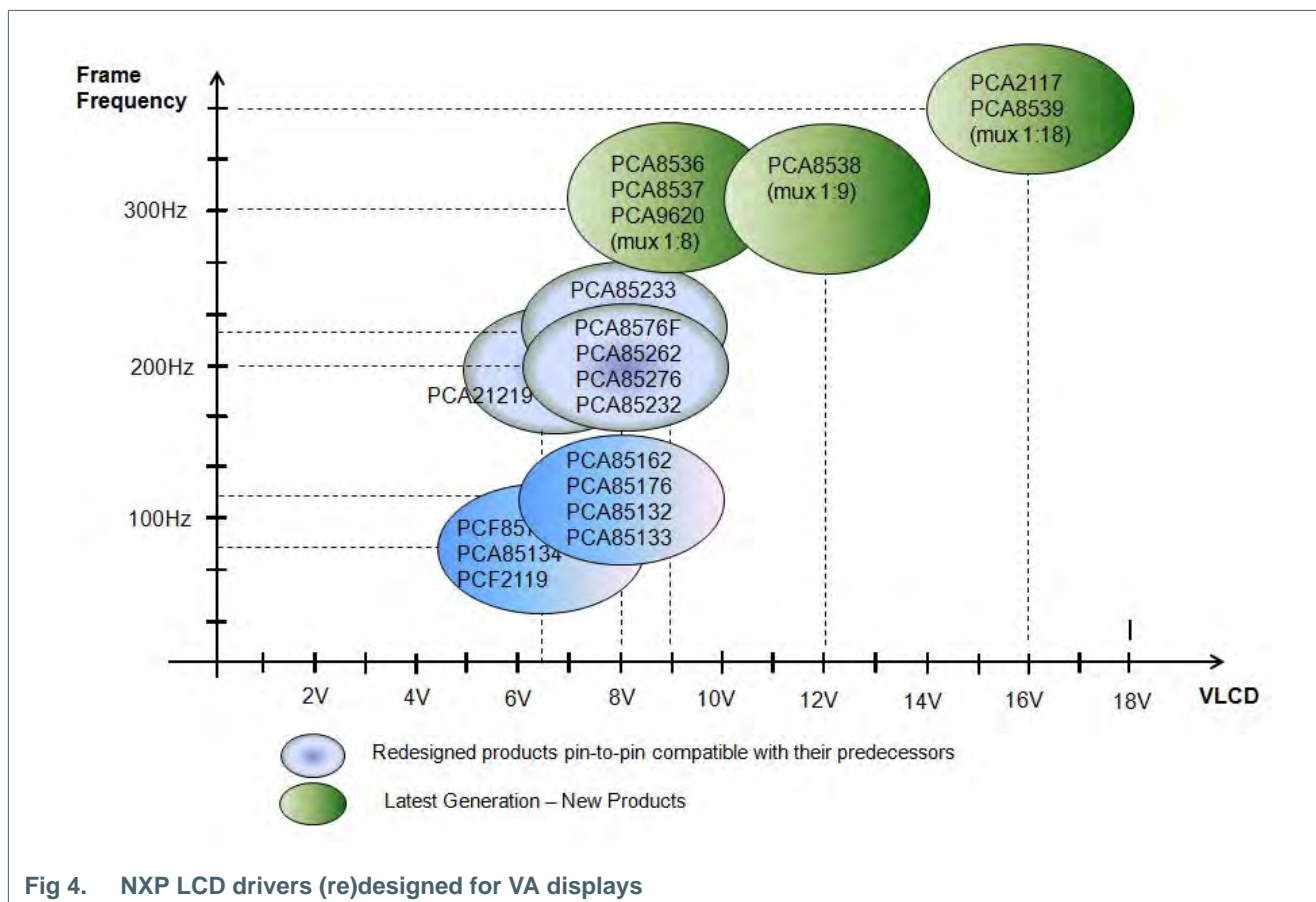

**Fig 4. NXP LCD drivers (re)designed for VA displays**

From one side, all the new Chip-On-Glass (COG) and packaged LCD drivers have been specifically designed to drive the VA displays. The maximum value of the  $V_{LCD}$  voltage has been increased to 9.0 V in the drivers with multiplex drive mode up to 1:8, to 12 V in the drivers with multiplex drive mode up to 1:9 (PCA8538UG) and to 16 V in the drivers with multiplex drive mode up to 1:18 (PCA8539DUG). Similarly, the frame frequency has been designed programmable in a wider range typically from 60 Hz up to 300 Hz or even up to 360 Hz as in the drivers with multiplex rate up to 1:18.



Fig 5. Displays of the demo boards driven by the PCA8538 and PCA8539

From the other side, the existing LCD drivers have been upgraded with new versions, which are pin-to-pin compatible with their respective predecessors, but delivering higher  $V_{LCD}$  and/or higher frame frequency. In such a way, the customers can easily replace the existing NXP LCD drivers with the new ones. This allows the usage of the better performing VA displays with no or minimal hardware and software changes. [Table 1](#) lists the NXP products upgraded to meet the VA display requirements:

Table 1. Existing NXP products upgraded to meet the VA display requirements

New NXP product	Predecessor product	Package	Maximum resolution	$V_{LCD(max)}$ [V]	$f_{fr(typical)}$ [Hz]	Notes
PCA85232U	PCA85132U	COG	4 x 160	8.0	117 to 176	$f_{fr}$ programmable, in production
PCA85233UG	PCA85133U	COG	4 x 80	8.0	150 to 220	$f_{fr}$ programmable, in production
PCA8576FUG	PCA8576DU	COG	4 x 40	8.0	200	Up to 105 °C, release Nov. 2013
PCF21219DUGR	PCF2119RU	COG	2 lines x 16 characters	6.5	200	Internal $V_{LCD}$ ; Release Jan. 2014
PCA85262ATT	PCA85162T	TSSOP48	4 x 32	8.0	200	Up to 105 °C, release Dec. 2013
PCA85276ATT	PCA85176T	TSSOP56	4 x 40	8.0	200	Up to 105 °C, release Dec. 2013

## 5. References

---

- [1] **AN10170** — Design guidelines for COG modules with NXP monochrome LCD drivers
- [2] **PCA85232U** — LCD driver for low multiplex rates. Data sheet
- [3] **PCA85233** — Universal LCD driver for low multiplex rates. Data sheet
- [4] **PCA8576F** — Automotive LCD driver for low multiplex rates. Data sheet
- [5] **PCF21219** — LCD controllers/drivers. Data sheet
- [6] **PCA85262** — 32 x 4 automotive LCD driver for low multiplex rates. Data sheet
- [7] **PCA85276** — Automotive LCD driver for low multiplex rates. Data sheet
- [8] **R\_10015** — Chip-On-Glass (COG) - a cost-effective and reliable technology for LCD displays



## 6. Legal information

### 6.1 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

### 6.2 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Evaluation products** — This product is provided on an "as is" and "with all faults" basis for evaluation purposes only. NXP Semiconductors, its affiliates and their suppliers expressly disclaim all warranties, whether express, implied or statutory, including but not limited to the implied warranties of non-infringement, merchantability and fitness for a particular purpose. The entire risk as to the quality, or arising out of the use or performance, of this product remains with customer.

In no event shall NXP Semiconductors, its affiliates or their suppliers be liable to customer for any special, indirect, consequential, punitive or incidental damages (including without limitation damages for loss of business, business interruption, loss of use, loss of data or information, and the like) arising out of the use of or inability to use the product, whether or not based on tort (including negligence), strict liability, breach of contract, breach of warranty or any other theory, even if advised of the possibility of such damages.

Notwithstanding any damages that customer might incur for any reason whatsoever (including without limitation, all damages referenced above and all direct or general damages), the entire liability of NXP Semiconductors, its affiliates and their suppliers and customer's exclusive remedy for all of the foregoing shall be limited to actual damages incurred by customer based on reasonable reliance up to the greater of the amount actually paid by customer for the product or five dollars (US\$5.00). The foregoing limitations, exclusions and disclaimers shall apply to the maximum extent permitted by applicable law, even if any remedy fails of its essential purpose.

### 6.3 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

7. Tables

Table 1. Existing NXP products upgraded to meet the VA display requirements .....7

8. Figures

Fig 1. Vertical Alignment display technology .....3

Fig 2. Twisted Nematic display technology .....4

Fig 3. VA display requirements .....5

Fig 4. NXP LCD drivers (re)designed for VA displays ...6

Fig 5. Displays of the demo boards driven by the PCA8538  
and PCA8539. ....7

9. Contents

1 Introduction ..... 3

2 Vertical Alignment display technology ..... 3

3 Vertical Alignment (VA) compared to Twisted Nematic (TN) displays ..... 3

4 NXP LCD drivers meet the VA requirements . 6

5 References ..... 8

6 Legal information..... 9

6.1 Definitions..... 9

6.2 Disclaimers..... 9

6.3 Trademarks..... 9

7 Tables ..... 10

8 Figures ..... 11

9 Contents ..... 12

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.