


## Cabling

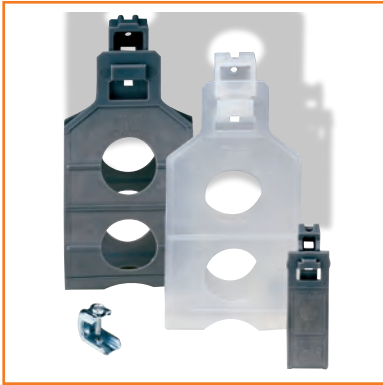

Cable Hangers

### PREMIER<sup>®</sup> Cable Hanging and Routing

Flexible non-metallic cable hangers and accessories hold copper or fiber bundles without sagging, bending or damaging the cable.

- UL listed
- TL25 hangers can hold up to 100 Cat5e cables and are load rated to 25 pounds
- TL50 hangers can hold up to 300 Cat5e cables and are load rated to 75 pounds
- BC25 beam clamp has a static load rating of 75 pounds. Clamp opening is .608 inches.

#### PREMIER

Item No.	Mfg. Part No.	Description
4421047500	PT-BC25	Beam Clamp - Accepts Threaded Rod Size 1/4 - 20
4421007500	PT-TL25	2.5 Inch Diameter Plenum Rated
4421017500	PT-TL25P	2.5 Inch Diameter Plenum Rated And UV Rated for Outdoor Use
4421027500	PT-TL50	5 Inch Diameter Plenum Rated
4421037500	PT-TL50P	5 Inch Diameter Plenum Rated And UV Rated for Outdoor Use

600 New Century Parkway  
 New Century, Kansas 66031-8000  
 1.800.755.1950

[www.kgplogistics.com](http://www.kgplogistics.com)