

**DIOTEC ELECTRONICS CORP.**  
 18020 Hobart Blvd., Unit B  
 Gardena, CA 90248 U.S.A  
 Tel.: (310) 767-1052 Fax: (310) 767-7958

Looking for: KBPC35005, KBPC3501, KBPC3502, KBPC3504  
 KBPC3506, KBPC3508, KBPC3510?

or  
 GBPC35005, GBPC3501, GBPC3502, GBPC3504, GBPC3506  
 GBPC3508, GBPC3510?

or  
 MDA3500, MDA3501, MDA3502, MDA3504, MDA3506,  
 MDA3508, MDA3510 (See Note 2)

## 35 AMP SILICON BRIDGE RECTIFIERS

### FEATURES


- VOID FREE VACUUM DIE SOLDERING FOR MAXIMUM MECHANICAL STRENGTH AND HEAT DISSIPATION (Solder Voids: Typical < 2%, Max. < 10% of Die Area)
- BUILT-IN STRESS RELIEF MECHANISM FOR SUPERIOR RELIABILITY AND PERFORMANCE
- INTEGRALLY MOLDED HEAT SINK PROVIDES VERY LOW THERMAL RESISTANCE FOR MAXIMUM HEAT DISSIPATION
- **UL RECOGNIZED - FILE #E124962**
- **RoHS COMPLIANT**

### MECHANICAL DATA

- Case: Case: Molded epoxy with integral heat sink  
Epoxy carries a U/L Flammability rating of 94V-0
- Terminals: Round silver plated copper pins or fast-on terminals
- Soldering: Per MIL-STD 202 Method 208 guaranteed
- Polarity: Marked on side of case
- Mounting Position: Any. Through hole for #10 screw.  
Max. mounting torque = 20 in-lb.
- Weight: Fast-on Terminals - 0.7 Ounces (20.0 Grams)  
Wire Leads - 0.55 Ounces (16.0 Grams)

### MECHANICAL SPECIFICATION

#### SERIES: DB3500P - DB3510P and ADB3504P - ADB3508P

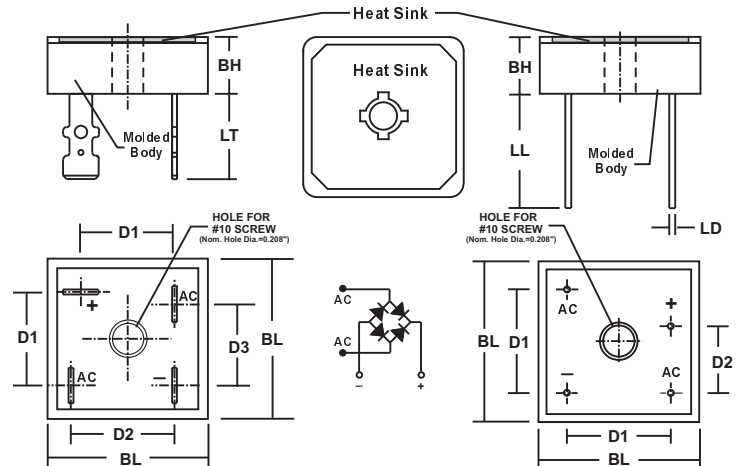

SYM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
BL	28.4	28.7	1.12	1.13
BH	9.6	10.2	0.38	0.40
D1	15.7	16.7	0.62	0.66
D2	17.5	18.5	0.69	0.73
D3	13.5	14.5	0.53	0.57
LT	n/a	15.2	n/a	0.6

SYM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
BL	28.4	28.7	1.12	1.13
BH	9.6	10.2	0.38	0.40
D1	17.5	18.5	0.69	0.73
D2	10.9	11.9	0.43	0.47
LL	20.6	n/a	0.81	n/a
LD	1.0	1.1	0.039	0.042

Suffix "T" indicates FAST-ON TERMINALS

Suffix "W" indicates WIRE LEADS

### MAXIMUM RATINGS & ELECTRICAL CHARACTERISTICS


Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive loads, derate current by 20%.

PARAMETER (TEST CONDITIONS)	SYMBOL	RATINGS								UNITS	
		CONTROLLED AVALANCHE			NON-CONTROLLED AVALANCHE						
		ADB 3504P	ADB 3506P	ADB 3508P	DB 3500P	DB 3501P	DB 3502P	DB 3504P	DB 3506P		DB 3508P
Series Number											
Maximum DC Blocking Voltage	V <sub>RM</sub>										
Working Peak Reverse Voltage	V <sub>RWM</sub>	400	600	800	50	100	200	400	600	800	1000
Maximum Peak Recurrent Reverse Voltage	V <sub>RRM</sub>										
RMS Reverse Voltage	V <sub>R (RMS)</sub>	280	420	560	35	70	140	280	420	560	700
Peak Forward Surge Current. Single 60Hz Half-Sine Wave Superimposed on Rated Load (JEDEC Method). T <sub>J</sub> = 125° C	I <sub>FSM</sub>	500									
Average Forward Rectified Current @ T <sub>c</sub> = 75° C	I <sub>O</sub>	35									
Junction Temperature Range	T <sub>J</sub>	-55 to +150									
Storage Temperature Range	T <sub>STG</sub>	-55 to +150									
Minimum Avalanche Voltage	V <sub>(BR) Min</sub>	See Note 1			n/a						
Maximum Avalanche Voltage	V <sub>(BR) Max</sub>	See Note 1			n/a						
Maximum Forward Voltage (Per Diode) at 17.5 Amps DC	V <sub>FM</sub>	1.05									
Maximum Reverse Current at Rated V <sub>RM</sub> @ T <sub>A</sub> = 25° C @ T <sub>A</sub> = 125° C	I <sub>RM</sub>	1 50									
Minimum Insulation Breakdown Voltage (Circuit to Case)	V <sub>ISO</sub>	2500									
Typical Thermal Resistance, Junction to Case	R <sub>θJC</sub>	1.2									

NOTES: (1) These bridges exhibit the avalanche characteristic at breakdown. If your application requires a specific breakdown voltage range, please contact us.


Data Sheet No. BRDB-3500P-1D  
 ADBB-3500P-1D

(2) Ensure that the mechanical configuration of the Fast-On Terminals is suitable for your application




## 35 AMP SILICON BRIDGE RECTIFIERS


**RATING & CHARACTERISTIC CURVES FOR SERIES DB3500P - DB3510P and SERIES ADB3504P - ADB3508P**

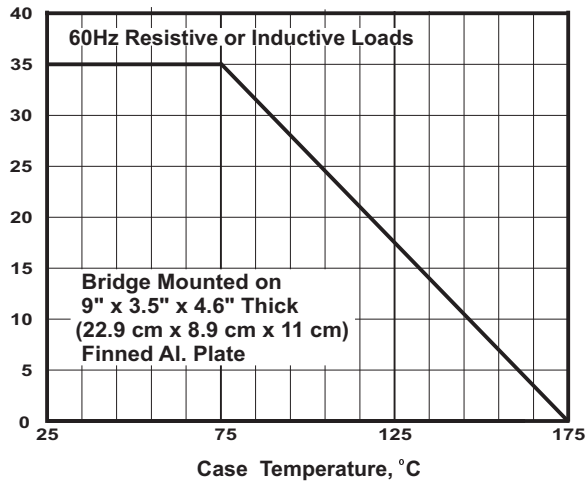


**FIGURE 1. FORWARD CURRENT DERATING CURVE**

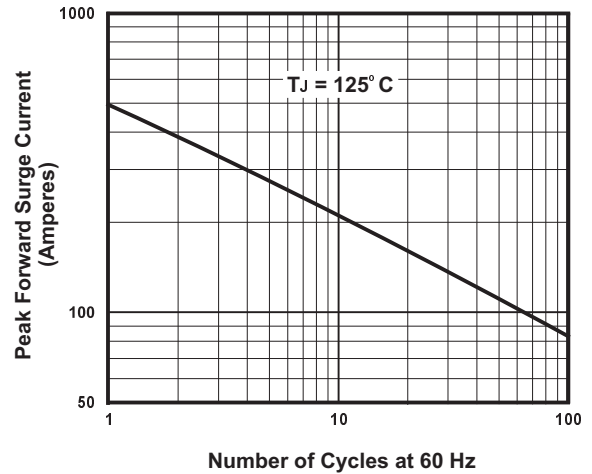

**FIGURE 2. MAXIMUM NON-REPETITIVE SURGE CURRENT**

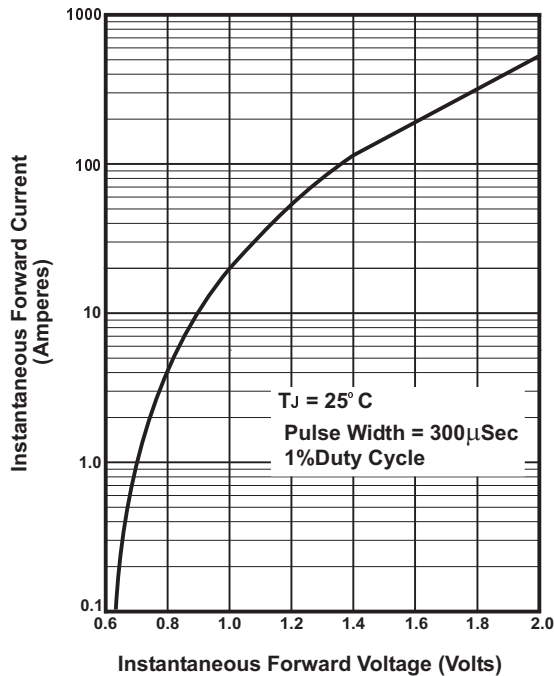

**FIGURE 3. TYPICAL FORWARD CHARACTERISTIC PER DIODE**

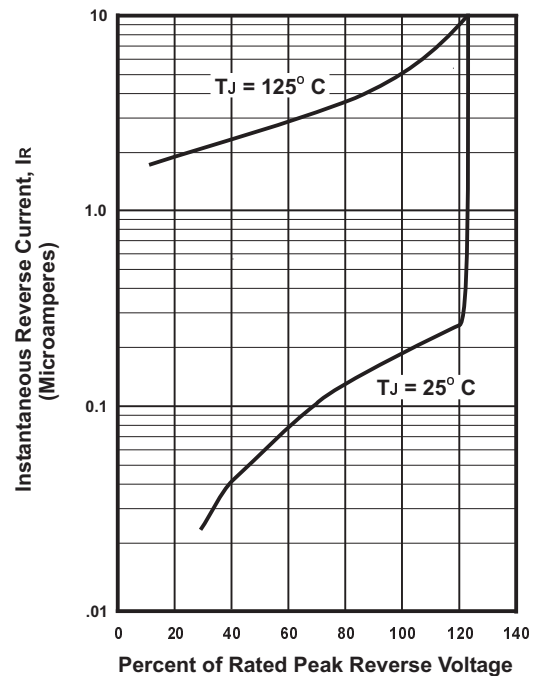

**FIGURE 4. TYPICAL REVERSE CHARACTERISTICS**