



## 50 AMP PRESS FIT TVS DIODES (GPP DIE)


### FEATURES

- **VOID FREE VACUUM DIE SOLDERING** For Maximum Mechanical Strength And Heat Dissipation  
**(Solder Voids: Typical  $\leq 2\%$ , Max.  $\leq 5\%$  of Die Area)**
- Full Silicon Die Area on P- and N-Sides Are Soldered to Copper Slugs For Minimum Stress And Maximum Heat Dissipation
- Press Fit Into Heat Sink to Further Enhance Heat Handling Capability
- Very Low Resistivity Silicon Die For Lower Operating Junction Temperature
- Very Low Reverse Current Leakage For Minimum Energy Loss

### MECHANICAL DATA

- Case: Nickel plated copper
- Finish: All external surfaces are corrosion resistant and the contact areas are readily solderable
- Soldering Temperature: 210 °C maximum
- Mounting Position: Any. Maximum force used for diode insertion to be 12 KN
- Polarity: Color coded epoxy ring.  
 ANODE on LEAD (Beige Ring):part number=TVS5026A.  
 CATHODE on LEAD (Black Ring):Part No.=TVS5026C.  
 Part No. marked on cap base.

### MECHANICAL SPECIFICATION

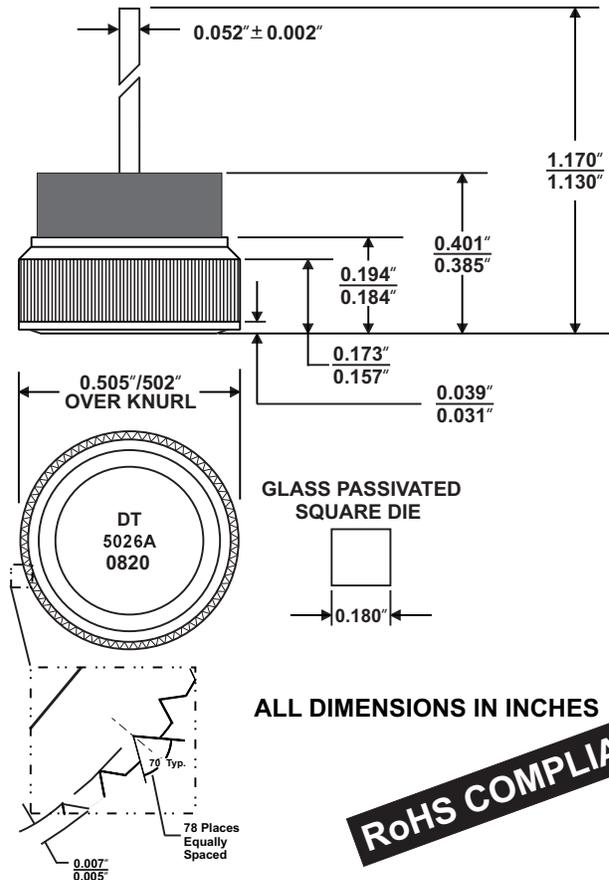

ALL DIMENSIONS IN INCHES

**RoHS COMPLIANT**

### MAXIMUM RATINGS & ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

PARAMETER (TEST CONDITIONS)	SYMBOL	RATINGS		UNITS
		TVS5026C	TVS5026A	
Series Number				
Maximum Recurrent Peak Reverse Voltage	VRRM	23	23	VOLTS
Working Peak Reverse Voltage	VRWM			
Maximum DC Blocking Voltage	VDC			
Breakdown Voltage (IR = 100 mA dc, Tc = 25 °C)	V(BR)	24 Min / 32 Max	24 Min / 32 Max	
Average Forward Rectified Current	IO	50	50	AMPS
Non-repetitive Peak Forward Surge Current (Half wave, single phase, 60 Hz sine applied to rated load)	IFSM	600	600	
Repetitive Peak Reverse Surge Current (Time Constant = 10 mSec Duty Cycle $\leq 1.0\%$ , Tc = 25 °C)	IRSM	110	110	
Instantaneous Forward Voltage (IF = 100A @ 300 $\mu$ Secpulse, Tc = 25°C)	V <sub>F</sub>	1.05 1.00	1.05 1.00	VOLTS
Maximum DC Reverse Current (VR = 20V DC, Tc = 25 °C)	IR	200	200	nA
Junction Operating & Storage Temperature Range	TJ, TSTG	-65 to +200	-65 to +200	°C