


High Frequency Wire Wound Transformers

EP7 Platforms - SMT



-  **Power Range:** up to 5W
-  **Height:** 9.27mm Max
-  **Footprint:** 13.34mm x 10.7mm Max
-  **Topology:** Forward and Flyback

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C³

PA1130NL	Pri. Inductance	(3-4)	500μH ± 10%	33-55 V, 200 KHz 8 V, 20 mA
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	8μH MAX	
	DCR	(3-4)	1750mΩ MAX	
		(6, 5-8, 7)	15mΩ MAX	
		(2-1)	215mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	9735.2		
FLYBACK TRANSFORMER				
PA1131NL	Pri. Inductance	(3-4)	500μH ±10%	33-55 V, 200 KHz 8 V, 20 mA
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	7.5μH MAX	
	DCR	(3-4)	1750mΩ MAX	
		(6, 5-8, 7)	35mΩ MAX	
		(2-1)	215mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	9735.2		
FLYBACK TRANSFORMER				
PA1132NL	Pri. Inductance	(3-4)	521μH ±10%	33-55 V, 200 KHz 8 V, 20 mA
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	7.5 μH MAX	
	DCR	(3-4)	1750mΩ MAX	
		(6, 5-8, 7)	100mΩ MAX	
		(2-1)	220mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	9937.1		
FLYBACK TRANSFORMER				

High Frequency Wire Wound Transformers

EP7 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C⁵

PA1279NL	Pri. Inductance	(3-4)	310 μ H $\pm$ 10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 μ H MAX	
	DCR	(3-4)	1600m Ω MAX	
		(6, 5-8, 7)	45 m Ω MAX	
		(2-1)	2600 m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	6584.5		
PA1280NL	Pri. Inductance	(3-4)	310 μ H $\pm$ 10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 μ H MAX	
	DCR	(3-4)	1600 m Ω MAX	
		(6, 5-8, 7)	87 m Ω MAX	
		(2-1)	2650 m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	6584.5		
PA1281NL	Pri. Inductance	(3-4)	310 μ H $\pm$ 10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 μ H MAX	
	DCR	(3-4)	1600 m Ω MAX	
		(6, 5-8, 7)	550 m Ω MAX	
		(2-1)	2600 m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	6584.5		
PA1825NL	Pri. Inductance	(8-1)	24.5 μ H $\pm$ 10%	FLYBACK TRANSFORMER
	Lk. Inductance	(8-1) with (2, 3, 4, 5, 6, 7) shorted	110 μ H MAX	
	DCR	(8-1)	50 m Ω MAX	
		(7-2)	50 m Ω MAX	
		(6-3)	110 m Ω MAX	
		(5-4)	160 m Ω MAX	
	Hi-Pot	Pri-Sec	600 Vdc	
	K1 Factor	1635.5		

High Frequency Wire Wound Transformers

EP7 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C⁵

PA2571NL	Pri. Inductance	(1-4)	100µH ±25%	FORWARD TRANSFORMER
	DCR	(1-4)	85 mΩ MAX	
		(5-7)	8760 mΩ MAX	
		(7-8)	2200 mΩ MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
	K1 Factor	93.5		
PA2617NL	Pri. Inductance	(3-4)	22.5 µH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (5,7) shorted	0.6 µH MAX	
	DCR	(3-4)	100 mΩ MAX	
		(5-8)	200 mΩ MAX	
		(2-1)	110 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
PA2626NL	Pri. Inductance	(3-4)	30 µH ±5%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.7 µH MAX	
	DCR	(3-4)	250 mΩ MAX	
		(6, 5-8, 7)	72 mΩ MAX	
		(2-4)	170 mΩ MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
PA3018NL	Pri. Inductance	(3-4)	48.6µH ±5%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.9 µH MAX	
	DCR	(3-4)	250 mΩ MAX	
		(6, 5-8, 7)	35 mΩ MAX	
		(2-1)	130 mΩ MAX	
	Hi-Pot	Pri-Sec	500 Vdc	
PA3018NL	K1 Factor	1892.5		

High Frequency Wire Wound Transformers

EP7 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C⁵

PA3019NL	Pri. Inductance	(3-4)	47.2 μ H $\pm$ 5%	
	Lk. Inductance	(3-4) with (1, 2, 8, 7, 6, 5) shorted	0.7 μ H MAX	
	DCR	(3-4)	250 m Ω MAX	
		(6, 5-8, 7)	72 m Ω MAX	
		(2-1)	170 m Ω MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
	K1 Factor	1838.0		
PA3020NL	Pri. Inductance	(3-4)	56.7 μ H $\pm$ 5%	
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.98 μ H MAX	
	DCR	(3-4)	400 m Ω MAX	
		(6, 5-8, 7)	200 m Ω MAX	
		(2-1)	110 m Ω MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
	K1 Factor	1766.4		
PA3021NL	Pri. Inductance	(3-4)	48.8 μ H $\pm$ 5%	
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.4 μ H MAX	
	DCR	(3-4)	100m Ω MAX	
		(6, 5-8, 7)	200 m Ω MAX	
		(2-1)	110 m Ω MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
	K1 Factor	3040.5		

PRELIMINARY

High Frequency Wire Wound Transformers

EP7 Platforms - SMT

Notes:

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak density, use the following formula:


$$B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk} \text{ (A)}$$
4. In high volt-sec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:

$$CoreLoss \text{ (W)} = 2.5E-14 * (Freq_kHz)^{1.63} * (\Delta B_Gauss)^{2.63}$$
 where ΔB can be calculated as:
 For Flyback Topology: $\Delta B = K1_Factor * (A)$
 For Forward Topology: $\Delta B = K1_Factor * Volt-\mu sec$

5. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA1130NL becomes PA1130NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=24mm), pitch (Po=16mm) an depth (Ko=9.8mm).

Mechanical

PAXXXNL

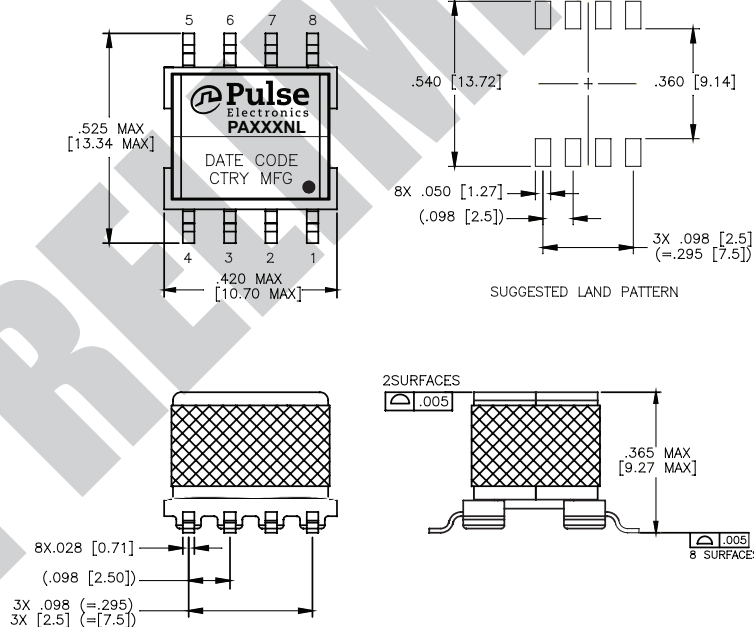

For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 78060
Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road
West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2014. Pulse Electronics, Inc. All rights reserved.