
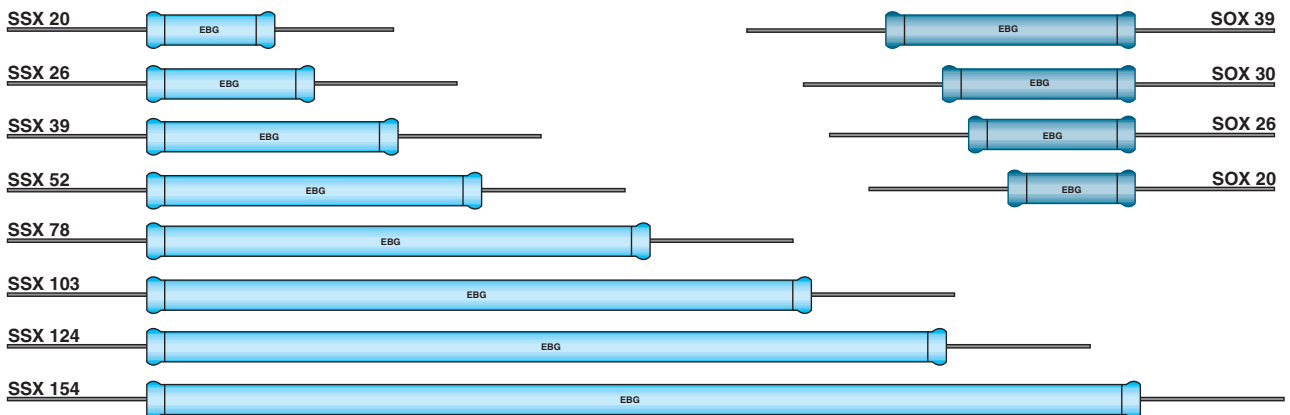


Typical pulse load ratings: e-function pulse, time between two pulses: 1 sec.,  
for other pulse forms and frequencies please contact your local EBG representative.

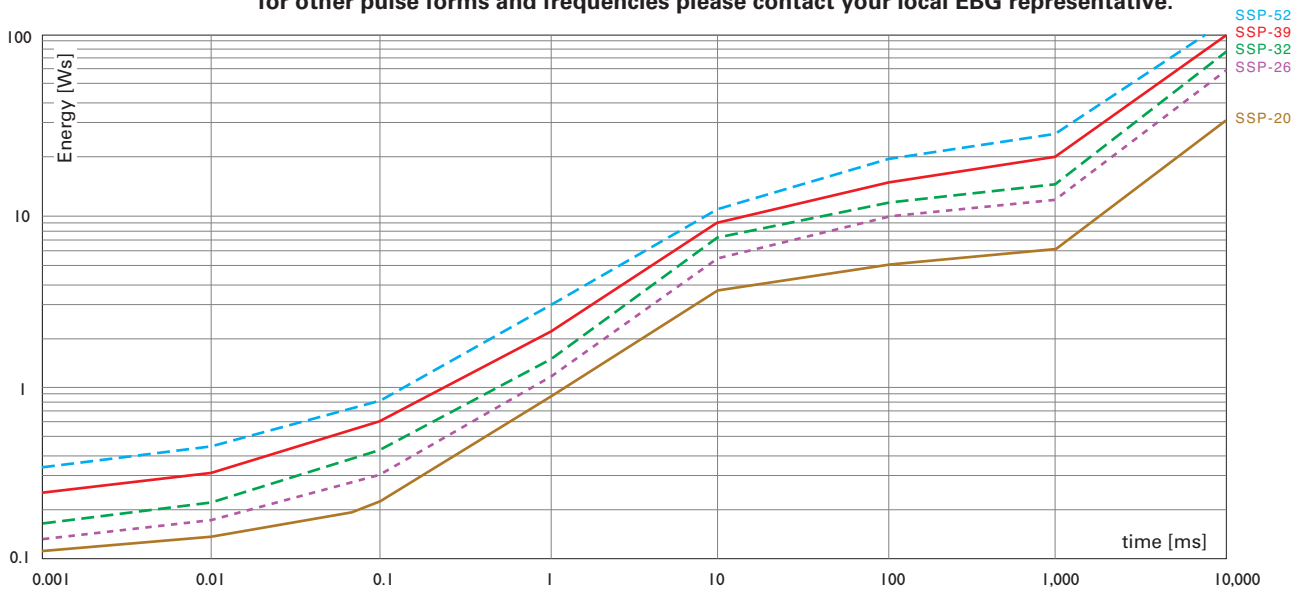

The above spec. sheet features our standard products. For further options, please contact our local EBG representative or contact us directly. For updated information, please visit our website!